

PyDriosm

*An open-source tool for downloading, reading and PostgreSQL-based I/O of
OpenStreetMap data*

Release 2.2.0

Qian Fu

Birmingham Centre for Railway Research and Education

School of Engineering

University of Birmingham

First release: **September 2019**

Last updated: **June 2023**

© Copyright 2019-2023, Qian Fu

Table of Contents

1	About PyDriosm	1
2	Installation	2
3	Modules	4
3.1	downloader	4
3.1.1	Base downloader class	4
3.1.2	Downloading data	18
3.2	reader	59
3.2.1	Parsing / transforming data	59
3.2.2	Base reader class	90
3.2.3	Reading data	102
3.3	ios	125
3.3.1	Storage I/O of data	125
3.3.2	Customised alternatives (Optional)	150
3.3.3	Other utilities	152
3.4	errors	154
3.4.1	Validation errors	154
3.4.2	Parse errors	156
3.5	utils	156
3.5.1	Data directories	156
3.5.2	General utilities	158
4	License	160
5	Acknowledgement	161
6	Contributors	162
7	Quick start	163
7.1	Download data	163
7.2	Read/parse data	166
7.2.1	PBF data (.pbf / .osm.pbf)	166
7.2.2	Shapefiles (.shp.zip / .shp)	172
7.3	Import data into / fetch data from a PostgreSQL server	175
7.3.1	Import data into the database	176
7.3.2	Fetch data from the database	178
7.3.3	Specific layers of shapefile	179

7.3.4	Drop data	182
7.4	Clear up ‘the mess’ in here	182
	Python Module Index	184
	Index	185

List of Figures

1	Type of the geometry object and keys within the nested dictionary of 'points'	168
2	Type of the geometry object and keys within the nested dictionary of 'lines'	169
3	Type of the geometry object and keys within the nested dictionary of 'multilinestrings'	169
4	Type of the geometry object and keys within the nested dictionary of 'multipolygons' .	170
5	Type of the geometry object and keys within the nested dictionary of 'other_relations'	171
6	An illustration of the database named ' <i>osmdb_test</i> '	175
7	An illustration of schemas for importing OSM PBF data into a PostgreSQL database . .	177
8	An illustration of table name for storing the ' <i>points</i> ' layer of the OSM PBF data of Rutland	177
9	An illustration of the newly created schemas for the selected layers of Birmingham shapefile data	180

Chapter 1

About PyDriosm

PyDriosm is an open-source tool that provides an effortless way to download and access [OpenStreetMap](#) (OSM) data in popular file formats, such as [shapefile](#) and [protobuf](#) binary format (PBF), which are freely available from [Geofabrik](#) and [BBBike](#). Additionally, the package offers a comprehensive solution for convenient I/O operations and efficient storage capabilities for parsed OSM data within [PostgreSQL](#) databases. This means that users can easily read from and write to PostgreSQL databases, enabling efficient data manipulation, querying, and other essential tasks. Whether you are a researcher, practitioner, or simply interested in working with OSM data, PyDriosm is a valuable tool to streamline your workflow and enhance your experience.

Chapter 2

Installation

To install the latest release of PyDriosm from PyPI via pip:

```
pip install --upgrade pydriosm
```

To install the most recent version of PyDriosm hosted on GitHub:

```
pip install --upgrade git+https://github.com/mikeqfu/pydriosm.git
```

Warning:

- Pip may fail to install the dependency package GDAL. In such a circumstance, try instead to install their .whl files, which can be downloaded from the web page of the archived “unofficial Windows binaries for Python extension packages” (by Christoph Gohlke) or a mirror site (by Erin Turnbull). For how to install a .whl file, see the answers to this StackOverflow question.

Note:

- If using a virtual environment, make sure it is activated.
- It is recommended to add pip install the option --upgrade (or -U) to ensure that you are getting the latest stable release of the package.
- Non-essential dependencies (e.g. GeoPandas) of PyDriosm are not enforced to be installed along with the installation of the package. This is intended to optimise the installation requirements. If a ModuleNotFoundError or an ImportError pops out when importing/running a function or a method, first try to install the module(s)/package(s) mentioned in the error message, and then try to import/run the function or method again.
- For more general instructions on the installation of Python packages, please refer to the official guide of [Installing Packages](#).

To check whether PyDriosm has been correctly installed, try to import the package via an interpreter shell:

```
>>> import pydriosm  
>>> pydriosm.__version__ # Check the latest version
```

The latest version is: 2.2.0

Chapter 3

Modules

The package includes the following five modules:

<code>downloader</code>	Download OpenStreetMap (OSM) data from free download servers: Geofabrik and BBBike.
<code>reader</code>	Read the OSM data extracts in various file formats.
<code>ios</code>	Implement storage I/O of (parsed) OSM data extracts with PostgreSQL.
<code>errors</code>	Define custom errors/exceptions.
<code>utils</code>	Provide various helper functions for use across the package.

3.1 downloader

Download OpenStreetMap (OSM) data from free download servers: Geofabrik and BBBike.

3.1.1 Base downloader class

<code>_Downloader([download_dir])</code>	Initialization of a data downloader.
--	--------------------------------------

`_Downloader`

```
class pydriosm.downloader._Downloader(download_dir=None)
```

Initialization of a data downloader.

Parameters

`download_dir (str | os.PathLike [str] | None)` – name or pathname of a directory for saving downloaded data files, defaults to None; when `download_dir=None`, downloaded data files are saved to a folder named ‘osm_data’ under the current working directory

Variables

- **download_dir** (*str* / *None*) – name or pathname of a directory for saving downloaded data files
- **data_paths** (*list*) – pathnames of all downloaded data files

Tests:

```
>>> from pydriosm.downloader import _Downloader
>>> import os

>>> d = _Downloader()

>>> d.NAME
'OSM Downloader'

>>> os.path.relpath(d.download_dir)
'osm_data'

>>> os.path.relpath(d.cdd())
'osm_data'

>>> d.download_dir == d.cdd()
True

>>> d = _Downloader(download_dir="tests\osm_data")
>>> os.path.relpath(d.download_dir)
'tests\osm_data'
```

Attributes

<i>DEFAULT_DOWNLOAD_DIR</i>	<i>str</i> : Default download directory.
<i>FILE_FORMATS</i>	<i>set</i> : Valid file formats.
<i>LONG_NAME</i>	<i>str</i> : Full name of the data resource.
<i>NAME</i>	<i>str</i> : Name of the free download server.
<i>VALID_SUBREGION_NAMES</i>	<i>set</i> : Valid subregion names.

[Downloader.DEFAULT_DOWNLOAD_DIR](#)

```
_Downloader.DEFAULT_DOWNLOAD_DIR =  
'/home/docs/checkouts/readthedocs.org/user_builds/pydriosm/checkouts/stable/docs/source/_static'  
str: Default download directory.
```

[Downloader.FILE_FORMATS](#)

```
_Downloader.FILE_FORMATS = {'.csv.xz', '.garmin-onroad-latin1.zip',  
.garmin-onroad.zip', '.garmin-opentopo.zip', '.garmin-osm.zip',  
.geojson.xz', '.gz', '.mapsforge-osm.zip', '.osm.bz2', '.osm.pbf', '.pbf',  
.shp.zip', '.svg-osm.zip'}
```

set: Valid file formats.

[Downloader.LONG_NAME](#)

```
_Downloader.LONG_NAME = 'OpenStreetMap data downloader'  
str: Full name of the data resource.
```

[Downloader.NAME](#)

```
_Downloader.NAME = 'OSM Downloader'  
str: Name of the free download server.
```

[Downloader.VALID_SUBREGION_NAMES](#)

```
_Downloader.VALID_SUBREGION_NAMES = {}  
set: Valid subregion names.
```

Methods

<code>cdd(*sub_dir[, mkdir])</code>	Change directory to default download directory and its subdirectories or a specific file.
<code>compose_cfm_msg([data_name, file_path, ...])</code>	Compose a short message to be printed for confirmation.
<code>file_exists(subregion_name, osm_file_format)</code>	Check if the data file of a queried geographic (sub)region already exists locally, given its default filename.
<code>file_exists_and_more(subregion_names, ...[, ...])</code>	Check if a requested data file already exists and compile information for downloading the data.
<code>get_default_sub_path(subregion_name_, ...)</code>	Get default sub path for saving OSM data file of a geographic (sub)region.
<code>get_prepacked_data(meth[, data_name, ...])</code>	Get auxiliary data (that is to be prepacked in the package).
<code>get_subregion_download_url(subregion_name, ...)</code>	Get a download URL of a geographic (sub)region.
<code>get_valid_download_info(subregion_name, ...)</code>	Get information of downloading (or downloaded) data file.
<code>make_subregion dirname(subregion_name)</code>	Make the name of the directory one level up from an OSM data file of a geographic (sub)region.
<code>print_act_msg([data_name, verbose, ...])</code>	Print a short message showing the action as a function runs.
<code>print_otw_msg([data_name, path_to_file, ...])</code>	Print a short message for an otherwise situation.
<code>validate_file_format(osm_file_format[, ...])</code>	Validate an input file format of OSM data.
<code>validate_subregion_name(subregion_name[, ...])</code>	Validate an input name of a geographic (sub)region.
<code>verify_download_dir(download_dir, ...)</code>	Verify the pathname of the current download directory.

_Downloader.cdd

`classmethod _Downloader.cdd(*sub_dir, mkdir=False, **kwargs)`

Change directory to default download directory and its subdirectories or a specific file.

Parameters

- `sub_dir (str / os.PathLike [str])` – name of directory; names of directories (and/or a filename)
- `mkdir (bool)` – whether to create a directory, defaults to False
- `kwargs` – [optional] parameters of `pyhelpers.dirs.cd()`

Returns

an absolute pathname to a directory (or a file)

Return type

str | os.PathLike[str]

Tests:

```
>>> from pydriosm.downloader import _Downloader
>>> import os

>>> os.path.relpath(_Downloader.cdd())
'osm_data'
```

_Downloader.compose_cfm_msg

```
classmethod _Downloader.compose_cfm_msg(data_name='<data_name>',
                                         file_path='<file_path>', update=False, note='')
```

Compose a short message to be printed for confirmation.

Parameters

- **data_name** (str) – name of the prepacked data, defaults to '<data_name>'
- **file_path** (str | os.PathLike [str]) – pathname of the prepacked data file, defaults to "<file_path>"
- **update** (bool) – whether to (check on and) update the prepacked data, defaults to False
- **note** (str) – additional message, defaults to ""

Returns

a short message to be printed for confirmation

Return type

str

Tests:

```
>>> from pydriosm.downloader import _Downloader

>>> _Downloader.compose_cfm_msg()
'To compile data of <data_name>\n?'

>>> _Downloader.compose_cfm_msg(update=True)
'To update the data of <data_name>\n?'
```

`_Downloader.file_exists`

```
_Downloader.file_exists(subregion_name, osm_file_format, data_dir=None, update=False,
                        verbose=True, ret_file_path=False)
```

Check if the data file of a queried geographic (sub)region already exists locally, given its default filename.

Parameters

- `subregion_name` (`str`) – name of a (sub)region available on a free download server
- `osm_file_format` (`str`) – file format of the OSM data available on a free download server
- `data_dir` (`str` / `None`) – directory where the data file (or files) is (or are) stored, defaults to `None`; when `data_dir=None`, it refers to the method `cdd()`
- `update` (`bool`) – whether to (check and) update the data, defaults to `False`
- `verbose` (`bool` / `int`) – whether to print relevant information in console, defaults to `True`
- `ret_file_path` (`bool`) – whether to return the pathname of the data file (if it exists), defaults to `False`

Returns

whether the requested data file exists; or the path to the data file

Return type

`bool` | `str`

Tests:

```
>>> from pydriosm.downloader import _Downloader
>>> d = _Downloader()
>>> d.file_exists('<subregion_name>', 'shp')
False
```

See also:

- Examples for the methods `GeofabrikDownloader.file_exists()` and `BBBikeDownloader.file_exists()`

Downloader.file_exists_and_more

```
_Downloader.file_exists_and_more(subregion_names, osm_file_format, data_dir=None,
                                 update=False, confirmation_required=True, verbose=True)
```

Check if a requested data file already exists and compile information for downloading the data.

Parameters

- **subregion_names** (*str* / *list*) – name(s) of geographic (sub)region(s) available on a free download server
- **osm_file_format** (*str*) – file format of the OSM data available on the free download server
- **data_dir** (*str* / *None*) – directory where the data file (or files) is (or are) stored, defaults to None
- **update** (*bool*) – whether to (check on and) update the data, defaults to False
- **confirmation_required** (*bool*) – whether asking for confirmation to proceed, defaults to True
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to True

Returns

whether the requested data file exists; or the path to the data file

Return type

tuple

Tests:

```
>>> from pydriosm.downloader import GeofabrikDownloader, BBBikeDownloader

>>> gfd = GeofabrikDownloader()

>>> gfd.file_exists_and_more('London', '.pbf')
(['Greater London'], '.osm.pbf', True, 'download', ['Greater London'], [])

>>> gfd.file_exists_and_more(['london', 'rutland'], '.pbf')
(['Greater London', 'Rutland'],
 '.osm.pbf',
 True,
 'download',
 ['Greater London', 'Rutland'],
 [])

>>> bbd = BBBikeDownloader()

>>> bbd.file_exists_and_more('London', '.pbf')
(['London'], '.pbf', True, 'download', ['London'], [])

>>> bbd.file_exists_and_more(['birmingham', 'leeds'], '.pbf')
(['Birmingham', 'Leeds'],
 '.pbf',
 True,
```

(continues on next page)

(continued from previous page)

```
'download',
['Birmingham', 'Leeds'],
[])
```

`_Downloader.get_default_sub_path`

`classmethod _Downloader.get_default_sub_path(subregion_name_, download_url)`

Get default sub path for saving OSM data file of a geographic (sub)region.

Parameters

- `subregion_name_ (str)` – validated name of a (sub)region available on a free download server
- `download_url (str)` – download URL of a geographic (sub)region

Returns

default sub path

Return type

`str | os.PathLike[str]`

Tests:

```
>>> from pydriosm.downloader import _Downloader

>>> subrgn_name_ = 'London'
>>> dwnld_url = 'https://download.bbbike.org/osm/bbbike/London/London.osm.pbf'

>>> _Downloader.get_default_sub_path(subrgn_name_, dwnld_url)
'\\london'
```

`_Downloader.get_prepacked_data`

`classmethod _Downloader.get_prepacked_data(meth, data_name='<data_name>', update=False, confirmation_required=True, verbose=False, cfm_msg_note='', act_msg_note='', act_msg_end=' ... ')`

Get auxiliary data (that is to be prepacked in the package).

Parameters

- `meth (Callable)` – name of a class method for getting (auxiliary) prepacked data
- `data_name (str)` – name of the prepacked data, defaults to '`<data_name>`'
- `update (bool)` – whether to (check on and) update the prepacked data, defaults to False
- `confirmation_required (bool)` – whether asking for confirmation to proceed, defaults to True

- **verbose** (bool / int) – whether to print relevant information in console, defaults to False
- **cfm_msg_note** (str) – additional message for the method `compose_cfm_msg()`, defaults to ""
- **act_msg_note** (str) – equivalent of the parameter note of the method `print_action_msg()`, defaults to ""
- **act_msg_end** (str) – equivalent of the parameter end of the method `print_action_msg()`, defaults to " . . . "

Returns

auxiliary data

Return type*Any***Tests:**

```
>>> from pydriosm.downloader import _Downloader
>>> _Downloader.get_prepacked_data(callable, confirmation_required=False) is None
True
```

_Downloader.get_subregion_download_url

classmethod `_Downloader.get_subregion_download_url(subregion_name, osm_file_format)`

Get a download URL of a geographic (sub)region.

Parameters

- **subregion_name** (str / None) – name of a (sub)region available on a free download server
- **osm_file_format** (str) – file format/extension of the OSM data available on the download server

Returns

validated subregion name and the corresponding download URL

Return type

tuple

See Examples for the methods `GeofabrikDownloader.get_subregion_download_url()` and `BBBikeDownloader.get_subregion_download_url()`.

`_Downloader.get_valid_download_info`

```
_Downloader.get_valid_download_info(subregion_name, osm_file_format, download_dir=None,
                                    **kwargs)
```

Get information of downloading (or downloaded) data file.

The information includes a valid subregion name, a default filename, a URL and an absolute path where the data file is (to be) saved locally.

Parameters

- `subregion_name` (`str`) – name of a (sub)region available on a free download server
- `osm_file_format` (`str`) – file format/extension of the OSM data available on the download server
- `download_dir` (`str / None`) – directory for saving the downloaded file(s), defaults to `None`; when `download_dir=None`, it refers to the method `cdd()`
- `kwargs` – [optional] parameters of `pyhelpers.dirs.cd()`, including `mkdir``` (default: ```False```)

Returns

valid subregion name, filename, download url and absolute file path

Return type

`tuple`

Tests:

```
>>> from pydriosm.downloader import _Downloader
>>> import os

>>> d = _Downloader()

>>> valid_dwnld_info = d.get_valid_download_info('subregion_name', 'osm_file_format')
>>> valid_dwnld_info[0] == '<subregion_name>'
True
>>> valid_dwnld_info[1] == '<download_url>'
True
>>> valid_dwnld_info[2] == '<download_url>'
True
>>> os.path.relpath(valid_dwnld_info[3])
'osm_data\<subregion_name_>\<download_url>'
```

See also:

- Examples for the methods: `GeofabrikDownloader.get_valid_download_info()` and `BBBikeDownloader.get_valid_download_info()`.

_Downloader.make_subregion_dirname

classmethod `_Downloader.make_subregion_dirname(subregion_name_)`

Make the name of the directory one level up from an OSM data file of a geographic (sub)region.

Parameters

`subregion_name (str)` – validated name of a (sub)region available on a free download server

Returns

name of the directory one level up from a downloaded OSM data file

Return type

`str`

Tests:

```
>>> from pydriosm.downloader import _Downloader

>>> subrgn_name_ = 'England'
>>> _Downloader.make_subregion_dirname(subrgn_name_)
'england'

>>> subrgn_name_ = 'Greater London'
>>> _Downloader.make_subregion_dirname(subrgn_name_)
'greater-london'
```

_Downloader.print_act_msg

classmethod `_Downloader.print_act_msg(data_name='<data_name>', verbose=False, confirmation_required=True, note='', end='...')`

Print a short message showing the action as a function runs.

Parameters

- `data_name (str)` – name of the prepacked data, defaults to '`<data_name>`'
- `verbose (bool / int)` – whether to print relevant information in console, defaults to False
- `confirmation_required (bool)` – whether asking for confirmation to proceed, defaults to True
- `note (str)` – additional message, defaults to ""
- `end (str)` – end string after printing the status message, defaults to "..."

Tests:

```
>>> from pydriosm.downloader import _Downloader

>>> _Downloader.print_act_msg(verbose=False) is None # Nothing will be printed.
True
```

(continues on next page)

(continued from previous page)

```
>>> _Downloader.print_act_msg(verbose=True); print("Done.")
Compiling the data ... Done.

>>> _Downloader.print_act_msg(verbose=True, note="(Some notes here.)"); print("Done.")
Compiling the data (Some notes here.) ... Done.

>>> _Downloader.print_act_msg(verbose=True, confirmation_required=False); print("Done.")
Compiling data of <data_name> ... Done.
```

`_Downloader.print_otw_msg`

```
classmethod _Downloader.print_otw_msg(data_name='<data_name>',
                                       path_to_file='<file_path>', verbose=False,
                                       error_message=None, update=False)
```

Print a short message for an otherwise situation.

Parameters

- **data_name** (*str*) – name of the prepacked data, defaults to '*<name_of_data>*'
- **path_to_file** (*str* / *os.PathLike* [*str*]) – pathname of the prepacked data file, defaults to "*<file_path>*"
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False
- **error_message** (*Exception* / *str* / *None*) – message of an error detected during execution of a function, defaults to None
- **update** (*bool*) – whether to (check on and) update the prepacked data, defaults to False

Tests:

```
>>> from pydriosm.downloader import _Downloader

>>> _Downloader.print_otw_msg() is None # Nothing will be printed.
True

>>> _Downloader.print_otw_msg(verbose=True)
Cancelled.

>>> _Downloader.print_otw_msg(verbose=2)
The collecting of <data_name> is cancelled, or no data is available.

>>> _Downloader.print_otw_msg(verbose=True, error_message="Errors.")
Failed. Errors.
```

[_Downloader.validate_file_format](#)

```
classmethod _Downloader.validate_file_format(osm_file_format, valid_file_formats=None,
                                             raise_err=True, **kwargs)
```

Validate an input file format of OSM data.

The validation is done by matching the input to a filename extension available on a free download server.

Parameters

- **osm_file_format** (*str*) – file format/extension of the data available on a free download server
- **valid_file_formats** (*Iterable*) – fil extensions of the data available on a free download server
- **raise_err** (*bool*) – (if the input fails to match a valid name) whether to raise the error `pydriosm.downloader.InvalidFormatException`, defaults to True
- **kwargs** – [optional] parameters of `pyhelpers.text.find_similar_str()`

Returns

validated file format

Return type

str

Tests:

```
>>> from pydriosm.downloader import _Downloader

>>> file_fmt = 'abc'
>>> _Downloader.validate_file_format(file_fmt) # Raise an error
Traceback (most recent call last):
...
pydriosm.errors.InvalidFormatException
`osm_file_format='abc'` -> The input `osm_file_format` is unidentifiable.
Valid options include: {'garmin-opentopo.zip', '.osm.bz2', '.osm.pbf', '.garmin-...'

>>> avail_file_fmts = ['.osm.pbf', '.shp.zip', '.osm.bz2']

>>> file_fmt = 'pbf'
>>> _Downloader.validate_file_format(file_fmt, avail_file_fmts)
'.osm.pbf'

>>> file_fmt = 'shp'
>>> _Downloader.validate_file_format(file_fmt, avail_file_fmts)
'.shp.zip'
```

See also:

- Examples for the methods `GeofabrikDownloader.validate_file_format()` and `BBBikeDownloader.validate_file_format()`.

`_Downloader.validate_subregion_name`

```
classmethod _Downloader.validate_subregion_name(subregion_name,
                                               valid_subregion_names=None,
                                               raise_err=True, **kwargs)
```

Validate an input name of a geographic (sub)region.

The validation is done by matching the input to a name of a geographic (sub)region available on a free download server.

Parameters

- `subregion_name` (`str`) – name/URL of a (sub)region available on a free download server
- `valid_subregion_names` (`Iterable`) – names of all (sub)regions available on a free download server
- `raise_err` (`bool`) – (if the input fails to match a valid name) whether to raise the error `pydriosm.downloader.InvalidSubregionName`, defaults to `True`
- `kwargs` – [optional] parameters of `pyhelpers.text.find_similar_str()`

Returns

valid subregion name that matches (or is the most similar to) the input

Return type

`str`

Tests:

```
>>> from pydriosm.downloader import _Downloader

>>> subrgn_name = 'abc'
>>> _Downloader.validate_subregion_name(subrgn_name)
Traceback (most recent call last):
...
pydriosm.errors.InvalidSubregionNameError:
`subregion_name='abc'`
1) `subregion_name` fails to match any in `<downloader>.valid_subregion_names`; or
2) The queried (sub)region is not available on the free download server.

>>> avail_subrgn_names = ['Greater London', 'Great Britain', 'Birmingham', 'Leeds']

>>> subrgn_name = 'Britain'
>>> _Downloader.validate_subregion_name(subrgn_name, avail_subrgn_names)
'Great Britain'

>>> subrgn_name = 'london'
>>> _Downloader.validate_subregion_name(subrgn_name, avail_subrgn_names)
'Greater London'
```

See also:

- Examples for the methods `GeofabrikDownloader.validate_subregion_name()` and `BBBikeDownloader.validate_subregion_name()`.

_Downloader.verify_download_dir

_Downloader.verify_download_dir(download_dir, verify_download_dir)

Verify the pathname of the current download directory.

Parameters

- **download_dir** (*str* / *os.PathLike* [*str*] / *None*) – directory for saving the downloaded file(s)
- **verify_download_dir** (*bool*) – whether to verify the pathname of the current download directory

Tests:

```
>>> from pydriosm.downloader import _Downloader
>>> import os

>>> d = _Downloader()

>>> os.path.relpath(d.download_dir)
'osm_data'

>>> d.verify_download_dir(download_dir='tests', verify_download_dir=True)
>>> os.path.relpath(d.download_dir)
'tests'
```

3.1.2 Downloading data

<i>GeofabrikDownloader</i> ([download_dir])	Download OSM data from Geofabrik free download server.
<i>BBBikeDownloader</i> ([download_dir])	Download OSM data from BBBike free download server.

GeofabrikDownloader

class *pydriosm.downloader.GeofabrikDownloader*(*download_dir=None*)

Download OSM data from [Geofabrik](#) free download server.

Parameters

download_dir (*str* / *os.PathLike* [*str*] / *None*) – name or pathname of a directory for saving downloaded data files, defaults to *None*; when *download_dir=None*, downloaded data files are saved to a folder named ‘osm_data’ under the current working directory

Variables

- **valid_subregion_names** (*set*) – names of (sub)regions available on the free download server
- **valid_file_formats** (*set*) – filename extensions of the data files available
- **download_index** (*pandas.DataFrame*) – index of downloads for all available (sub)regions

- **continent_tables** (*dict*) – download catalogues for each continent
- **region_subregion_tier** (*dict*) – region-subregion tier
- **having_no_subregions** (*list*) – all (sub)regions that have no subregions
- **catalogue** (*pandas.DataFrame*) – a catalogue (index) of all available downloads (similar to `download_index`)
- **download_dir** (*str* / *None*) – name or pathname of a directory for saving downloaded data files
- **data_pathnames** (*list*) – list of pathnames of all downloaded data files

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> import os

>>> gfd = GeofabrikDownloader()

>>> gfd.NAME
'Geofabrik'

>>> gfd.URL
'https://download.geofabrik.de/'

>>> gfd.DOWNLOAD_INDEX_URL
'https://download.geofabrik.de/index-v1.json'

>>> os.path.relpath(gfd.download_dir)
'osm_data\geofabrik'

>>> gfd = GeofabrikDownloader(download_dir="tests\osm_data")
>>> os.path.relpath(gfd.download_dir)
'tests\osm_data'
```

Attributes

<i>DEFAULT_DOWNLOAD_DIR</i>	Default download directory.
<i>DOWNLOAD_INDEX_URL</i>	URL of the official download index.
<i>FILE_FORMATS</i>	Valid file formats.
<i>LONG_NAME</i>	Full name of the data resource.
<i>NAME</i>	Name of the free download server.
<i>URL</i>	URL of the homepage to the free download server.

GeofabrikDownloader.DEFAULT_DOWNLOAD_DIR

```
GeofabrikDownloader.DEFAULT_DOWNLOAD_DIR = 'osm_data\\geofabrik'  
Default download directory.
```

GeofabrikDownloader.DOWNLOAD_INDEX_URL

```
GeofabrikDownloader.DOWNLOAD_INDEX_URL =  
'https://download.geofabrik.de/index-v1.json'  
URL of the official download index.
```

GeofabrikDownloader.FILE_FORMATS

```
GeofabrikDownloader.FILE_FORMATS = {'osm.bz2', 'osm.pbf', '.shp.zip'}  
Valid file formats.
```

GeofabrikDownloader.LONG_NAME

```
GeofabrikDownloader.LONG_NAME = 'Geofabrik OpenStreetMap data extracts'  
Full name of the data resource.
```

GeofabrikDownloader.NAME

```
GeofabrikDownloader.NAME = 'Geofabrik'  
Name of the free download server.
```

GeofabrikDownloader.URL

```
GeofabrikDownloader.URL = 'https://download.geofabrik.de/'  
URL of the homepage to the free download server.
```

Methods

<code>download_osm_data(subregion_names, ...[, ...])</code>	Download OSM data (in a specific format) of one (or multiple) geographic (sub)region(s).
<code>download_subregion_data(subregion_names, ...)</code>	Download OSM data (in a specific file format) of all subregions (if available) for one (or multiple) geographic (sub)region(s).
<code>file_exists(subregion_name, osm_file_format)</code>	Check whether a data file of a geographic (sub)region already exists locally, given its default filename.
<code>get_catalogue([update, ...])</code>	Get a catalogue (index) of all available downloads.
<code>get_continent_tables([update, ...])</code>	Get download catalogues for each continent.
<code>get_default_filename(subregion_name, ...[, ...])</code>	get a default filename for a geographic (sub)region.
<code>get_default.pathname(subregion_name, ...[, ...])</code>	Get the default pathname of a local directory for storing a downloaded data file.
<code>get_download_index([update, ...])</code>	Get the official index of downloads for all available geographic (sub)regions.
<code>get_raw_directory_index(url[, verbose])</code>	Get a raw directory index (including download information of older file logs).
<code>get_region_subregion_tier([update, ...])</code>	Get region-subregion tier and all (sub)regions that have no subregions.
<code>get_subregion_download_url(subregion_name, ...)</code>	Get a download URL of a geographic (sub)region.
<code>get_subregion_table(url[, verbose])</code>	Get download information of all geographic (sub)regions on a web page.
<code>get_subregions(*subregion_name[, deep])</code>	Retrieve names of all subregions (if any) of the given geographic (sub)region(s).
<code>get_valid_download_info(subregion_name, ...)</code>	Get information of downloading (or downloaded) data file.
<code>get_valid_subregion_names([update, ...])</code>	Get names of all available geographic (sub)regions.
<code>specify_sub_download_dir(subregion_name, ...)</code>	Specify a directory for downloading data of all subregions of a geographic (sub)region.
<code>validate_file_format(osm_file_format, **kwargs)</code>	Validate an input file format of OSM data.
<code>validate_subregion_name(subregion_name, ...)</code>	Validate an input name of a geographic (sub)region.

GeofabrikDownloader.download_osm_data

```
GeofabrikDownloader.download_osm_data(subregion_names, osm_file_format,
                                       download_dir=None, update=False,
                                       confirmation_required=True, deep_retry=False,
                                       interval=None, verify_download_dir=True,
                                       verbose=False, ret_download_path=False, **kwargs)
```

Download OSM data (in a specific format) of one (or multiple) geographic (sub)region(s).

Parameters

- **subregion_names** (*str* / *list*) – name of a geographic (sub)region (or names of multiple geographic (sub)regions) available on Geofabrik free download server
- **osm_file_format** (*str*) – file format/extension of the OSM data available on the download server
- **download_dir** (*str* / *None*) – directory for saving the downloaded file(s), defaults to None; when `download_dir=None`, it refers to the method `cdd()`
- **update** (*bool*) – whether to update the data if it already exists, defaults to False
- **confirmation_required** (*bool*) – whether asking for confirmation to proceed, defaults to True
- **deep_retry** (*bool*) – whether to further check availability of sub-subregions data, defaults to False
- **interval** (*int* / *float* / *None*) – interval (in sec) between downloading two subregions, defaults to None
- **verify_download_dir** (*bool*) – whether to verify the pathname of the current download directory, defaults to True
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False
- **ret_download_path** (*bool*) – whether to return the path(s) to the downloaded file(s), defaults to False
- **kwargs** – optional parameters of `pyhelpers.ops.download_file_from_url()`

Returns

absolute path(s) to downloaded file(s) when `ret_download_path` is True

Return type

list | *str*

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> from pyhelpers.dirs import delete_dir
>>> import os
```

Example 1:

```

>>> gfd = GeofabrikDownloader()

>>> # Download PBF data file of 'Greater London' and 'Rutland'
>>> subrgn_names = ['london', 'rutland'] # Case-insensitive
>>> file_format = ".pbf"

>>> gfd.download_osm_data(subrgn_names, file_format, verbose=True)
To download .osm.pbf data of the following geographic (sub)region(s):
    Greater London
    Rutland
? [No]|Yes: yes
Downloading "greater-london-latest.osm.pbf"
    to "osm_data\geofabrik\europe\great-britain\england\greater-london\" ... Done.
Downloading "rutland-latest.osm.pbf"
    to "osm_data\geofabrik\europe\great-britain\england\rutland\" ... Done.

>>> len(gfd.data_paths)
2
>>> for fp in gfd.data_paths: print(os.path.basename(fp))
greater-london-latest.osm.pbf
rutland-latest.osm.pbf

>>> # Since `download_dir` was not specified when instantiating the class,
>>> #   the data is now in the default download directory
>>> os.path.relpath(gfd.download_dir)
'osm_data\geofabrik'
>>> dwnld_dir = os.path.dirname(gfd.download_dir)

>>> # Download shapefiles of West Midlands (to a given directory "tests\osm_data")
>>> region_name = 'west midlands' # Case-insensitive
>>> file_format = ".shp"
>>> new_dwnld_dir = "tests\osm_data"

>>> gfd.download_osm_data(region_name, file_format, new_dwnld_dir, verbose=True)
To download .shp.zip data of the following geographic (sub)region(s):
    West Midlands
? [No]|Yes: yes
Downloading "west-midlands-latest-free.shp.zip"
    to "tests\osm_data\west-midlands\" ... Done.
>>> len(gfd.data_paths)
3
>>> os.path.relpath(gfd.data_paths[-1])
'tests\osm_data\west-midlands\west-midlands-latest-free.shp.zip'

>>> # Now the `download_dir` variable has changed to the given one
>>> os.path.relpath(gfd.download_dir) == new_dwnld_dir
True
>>> # while the `cdd()` remains the default one
>>> os.path.relpath(gfd.cdd())
'osm_data\geofabrik'

>>> # Delete the above downloaded directories
>>> delete_dir([dwnld_dir, new_dwnld_dir], verbose=True)
To delete the following directories:
    "osm_data\" (Not empty)
    "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "osm_data\" ... Done.
Deleting "tests\osm_data\" ... Done.

```

Example 2:

```

>>> # Create a new instance with a pre-specified download directory
>>> gfd = GeofabrikDownloader(download_dir="tests\osm_data")

>>> os.path.relpath(gfd.download_dir)
'tests\osm_data'

>>> # Download shapefiles of Great Britain (to the directory specified by instantiation)
>>> # (Note that .shp.zip data is not available for "Great Britain" for free download.)
>>> region_name = 'Great Britain' # Case-insensitive
>>> file_format = ".shp"

>>> # By default, `deep_retry=False`
>>> gfd.download_osm_data(region_name, osm_file_format=file_format, verbose=True)
To download .shp.zip data of the following geographic (sub)region(s):
    Great Britain
? [No] | Yes: yes
No .shp.zip data is found for "Great Britain".
Try to download the data of its subregions instead
? [No] | Yes: yes
Downloading "england-latest-free.shp.zip"
    to "tests\osm_data\europ...\" ... Done.
Downloading "scotland-latest-free.shp.zip"
    to "tests\osm_data\europ...\" ... Done.
Downloading "wales-latest-free.shp.zip"
    to "tests\osm_data\europ...\" ... Done.

>>> len(gfd.data_paths)
3

>>> # Now set `deep_retry=True`
>>> gfd.download_osm_data(region_name, file_format, verbose=True, deep_retry=True)
To download .shp.zip data of the following geographic (sub)region(s):
    Great Britain
? [No] | Yes: yes
No .shp.zip data is found for "Great Britain".
Try to download the data of its subregions instead
? [No] | Yes: yes
"scotland-latest-free.shp.zip" is already available at "tests\osm_data\europ...".
"wales-latest-free.shp.zip" is already available at "tests\osm_data\europ...".
Downloading "bedfordshire-latest-free.shp.zip"
    to "tests\osm_data\europ...\" ... Done.
...
Downloading "west-yorkshire-latest-free.shp.zip"
    to "tests\osm_data\europ...\" ... Done.
Downloading "wiltshire-latest-free.shp.zip"
    to "tests\osm_data\europ...\" ... Done.
Downloading "worcestershire-latest-free.shp.zip"
    to "tests\osm_data\europ...\" ... Done.

>>> # Check the file paths
>>> len(gfd.data_paths)
50
>>> # Check the current default `download_dir`
>>> os.path.relpath(gfd.download_dir)
'tests\osm_data'

>>> os.path.relpath(os.path.commonpath(gfd.data_paths))
'tests\osm_data\europ...\\great-britain\\great-britain-shp-zip'

>>> # Delete all the downloaded files
>>> delete_dir(gfd.download_dir, verbose=True)

```

(continues on next page)

(continued from previous page)

```
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.
```

GeofabrikDownloader.download_subregion_data

```
GeofabrikDownloader.download_subregion_data(subregion_names, osm_file_format,
                                             download_dir=None, deep=False,
                                             ret_download_path=False, **kwargs)
```

Download OSM data (in a specific file format) of all subregions (if available) for one (or multiple) geographic (sub)region(s).

If no subregion data is available for the region(s) specified by `subregion_names`, then the data of `subregion_names` would be downloaded only.

Parameters

- `subregion_names` (`str` / `list`) – name of a geographic (sub)region (or names of multiple geographic (sub)regions) available on Geofabrik free download server
- `osm_file_format` (`str`) – file format/extension of the OSM data available on the download server
- `download_dir` (`str` / `None`) – directory for saving the downloaded file(s), defaults to `None`; when `download_dir=None`, it refers to the method `cdd()`
- `deep` (`bool`) – whether to try to search for subregions of subregion(s), defaults to `False`
- `ret_download_path` (`bool`) – whether to return the path(s) to the downloaded file(s), defaults to `False`
- `kwargs` – optional parameters of
`pydriosm.GeofabrikDownloader.download_osm_data()`

Returns

the path(s) to the downloaded file(s) when `ret_download_path=True`

Return type

`list` | `str`

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> from pyhelpers.dirs import cd, delete_dir
>>> import os

>>> gfd = GeofabrikDownloader()

>>> subrgn_names = ['rutland', 'west yorkshire']
>>> file_format = ".pbf"
>>> dwld_dir = "tests\osm_data"

>>> gfd.download_subregion_data(subrgn_names, file_format, dwld_dir, verbose=True)
```

(continues on next page)

(continued from previous page)

```
To download .osm.pbf data of the following geographic (sub)region(s):
    Rutland
    West Yorkshire
? [No]|Yes: yes
Downloading "rutland-latest.osm.pbf"
    to "tests\osm_data\rutland\" ... Done.
Downloading "west-yorkshire-latest.osm.pbf"
    to "tests\osm_data\west-yorkshire\" ... Done.

>>> len(gfd.data_paths)
2
>>> for fp in gfd.data_paths: print(os.path.relpath(fp))
tests\osm_data\rutland\rutland-latest.osm.pbf
tests\osm_data\west-yorkshire\west-yorkshire-latest.osm.pbf

>>> # Delete "tests\osm_data\rutland-latest.osm.pbf"
>>> rutland_dir = os.path.dirname(gfd.data_paths[0])
>>> delete_dir(rutland_dir, confirmation_required=False, verbose=True)
Deleting "tests\osm_data\rutland\" ... Done.

>>> # Try to download data given another list which also includes 'West Yorkshire'
>>> subrgn_names = ['west midlands', 'west yorkshire']

>>> # Set `ret_download_path=True`
>>> dwnld_file_pathnames = gfd.download_subregion_data(
...     subrgn_names, file_format, dwnld_dir, verbose=True, ret_download_path=True)
"west-midlands-latest.osm.pbf" is already available
    at "tests\osm_data\west-midlands\".
To download .osm.pbf data of the following geographic (sub)region(s):
    West Midlands
? [No]|Yes: yes
Downloading "west-midlands-latest.osm.pbf"
    to "tests\osm_data\west-midlands\" ... Done.

>>> len(gfd.data_paths) # The pathname of the newly downloaded file is added
3
>>> len(dwnld_file_pathnames)
2
>>> for fp in dwnld_file_pathnames: print(os.path.relpath(fp))
tests\osm_data\west-midlands\west-midlands-latest.osm.pbf
tests\osm_data\west-yorkshire\west-yorkshire-latest.osm.pbf

>>> # Update (or re-download) the existing data file by setting `update=True`
>>> gfd.download_subregion_data(
...     subrgn_names, file_format, download_dir=dwnld_dir, update=True, verbose=True)
"west-midlands-latest.osm.pbf" is already available
    at "tests\osm_data\west-midlands\".
"west-yorkshire-latest.osm.pbf" is already available
    at "tests\osm_data\west-yorkshire\".
To update the .osm.pbf data of the following geographic (sub)region(s):
    West Midlands
    West Yorkshire
? [No]|Yes: yes
Updating "west-midlands-latest.osm.pbf"
    at "tests\osm_data\west-midlands\" ... Done.
Updating "west-yorkshire-latest.osm.pbf"
    at "tests\osm_data\west-yorkshire\" ... Done.

>>> # To download the PBF data of all available subregions of England
```

(continues on next page)

(continued from previous page)

```

>>> subrgn_name = 'England'

>>> dwnld_file_pathnames = gfd.download_subregion_data(
...     subrgn_name, file_format, download_dir=dwnld_dir, update=True, verbose=True,
...     ret_download_path=True)
"west-midlands-latest.osm.pbf" is already available
    at "tests\osm_data\west-midlands\".
"west-yorkshire-latest.osm.pbf" is already available
    at "tests\osm_data\west-yorkshire\".
To download/update the .osm.pbf data of the following geographic (sub)region(s):
    Bedfordshire
    Berkshire
    Bristol
    ...
    West Midlands
    ...
    West Yorkshire
    Wiltshire
    Worcestershire
? [No]|Yes: yes
Downloading "bedfordshire-latest.osm.pbf"
    to "tests\osm_data\bedfordshire\" ... Done.
Downloading "berkshire-latest.osm.pbf"
    to "tests\osm_data\berkshire\" ... Done.
Downloading "bristol-latest.osm.pbf"
    to "tests\osm_data\bristol\" ... Done.
...
...
Updating "west-midlands-latest.osm.pbf"
    at "tests\osm_data\west-midlands\" ... Done.
...
...
Updating "west-yorkshire-latest.osm.pbf"
    at "tests\osm_data\west-yorkshire\" ... Done.
Downloading "wiltshire-latest.osm.pbf"
    to "tests\osm_data\wiltshire\" ... Done.
Downloading "worcestershire-latest.osm.pbf"
    to "tests\osm_data\worcestershire\" ... Done.

>>> len(dwnld_file_pathnames)
47
>>> os.path.commonpath(dwnld_file_pathnames) == gfd.download_dir
True

>>> # Delete the download directory and the downloaded files
>>> delete_dir(gfd.download_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.

```

GeofabrikDownloader.file_exists

```
GeofabrikDownloader.file_exists(subregion_name, osm_file_format, data_dir=None,
                               update=False, verbose=False, ret_file_path=False)
```

Check whether a data file of a geographic (sub)region already exists locally, given its default filename.

Parameters

- **subregion_name** (*str*) – name of a (sub)region available on Geofabrik free download server
- **osm_file_format** (*str*) – file format/extension of the OSM data available on the download server
- **data_dir** (*str* / *None*) – directory where the data file (or files) is (or are) stored, defaults to *None*; when *data_dir=None*, it refers to the method *cdd()*
- **update** (*bool*) – whether to (check and) update the data, defaults to *False*
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to *False*
- **ret_file_path** (*bool*) – whether to return the path to the data file (if it exists), defaults to *False*

Returns

whether the requested data file exists; or the path to the data file

Return type

bool | *str*

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> from pyhelpers.dirs import delete_dir
>>> import os

>>> # Specify a download directory
>>> dwnld_dir = "tests\osm_data"

>>> gfd = GeofabrikDownloader(download_dir=dwnld_dir)

>>> subrgn_name = 'london'
>>> file_format = ".pbf"

>>> # Download the PBF data of London (to the default directory)
>>> gfd.download_osm_data(subrgn_name, file_format, verbose=True)
To download .osm.pbf data of the following geographic (sub)region(s):
    Greater London
? [No] | Yes: yes
Downloading "greater-london-latest.osm.pbf"
    to "tests\osm_data\europe\great-britain\england\greater-london"\...Done.

>>> # Check whether the PBF data file exists; `ret_file_path` is by default `False`
>>> pbf_exists = gfd.file_exists(subrgn_name, file_format)
>>> pbf_exists # If the data file exists at the default directory
True
```

(continues on next page)

(continued from previous page)

```
>>> # Set `ret_file_path=True`
>>> path_to_pbf = gfd.file_exists(subrgn_name, file_format, ret_file_path=True)
>>> os.path.relpath(path_to_pbf) # If the data file exists at the default directory
'tests\osm_data\eur...\\great-britain\\england\\greater-london\\greater-londo...'

>>> # Remove the download directory:
>>> delete_dir(dwld_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.

>>> # Check if the data file still exists at the specified download directory
>>> gfd.file_exists(subrgn_name, file_format)
False
```

GeofabrikDownloader.get_catalogue

`GeofabrikDownloader.get_catalogue(update=False, confirmation_required=True, verbose=False)`

Get a catalogue (index) of all available downloads.

Similar to the method `get_download_index()`.

Parameters

- `update (bool)` – whether to (check on and) update the prepacked data, defaults to False
- `confirmation_required (bool)` – whether asking for confirmation to proceed, defaults to True
- `verbose (bool / int)` – whether to print relevant information in console, defaults to False

Returns

a catalogue for all subregion downloads

Return type

`pandas.DataFrame | None`

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader

>>> gfd = GeofabrikDownloader()

>>> # A download catalogue for all subregions
>>> dwld_catalog = gfd.get_catalogue()

>>> type(dwld_catalog)
pandas.core.frame.DataFrame
>>> dwld_catalog.head()
   subregion ...
0      Africa ...
1  Antarctica ...
2        Asia ...
```

.osm.bz2
https://download.geofabrik.de/africa-latest.osm.bz2
https://download.geofabrik.de/antarctica-latest.osm.bz2
https://download.geofabrik.de/asia-latest.osm.bz2

(continues on next page)

(continued from previous page)

```

3 Australia and Oceania ... https://download.geofabrik.de/australia-oceani...
4 Central America ... https://download.geofabrik.de/central-america-...
[5 rows x 6 columns]

>>> dwld_catalog.columns.to_list()
['subregion',
 'subregion-url',
 '.osm.pbf',
 '.osm.pbf-size',
 '.shp.zip',
 '.osm.bz2']

```

Note:

- Information of [LondonEnfield](#) is not directly available from the web page of [Greater London](#).
- Two subregions have the same name ‘Georgia’: [EuropeGeorgia](#) and [USGeorgia](#); In the latter case, a suffix ‘(US)’ is appended to the name in the table.

GeofabrikDownloader.get_continent_tables

`GeofabrikDownloader.get_continent_tables(update=False, confirmation_required=True, verbose=False)`

Get download catalogues for each continent.

Parameters

- `update (bool)` – whether to (check on and) update the prepacked data, defaults to False
- `confirmation_required (bool)` – whether asking for confirmation to proceed, defaults to True
- `verbose (bool / int)` – whether to print relevant information in console, defaults to False

Returns

download catalogues for each continent

Return type

`dict | None`

Examples:

```

>>> from pydriosm.downloader import GeofabrikDownloader
>>> gfd = GeofabrikDownloader()
>>> # Download information of subregions for each continent
>>> continent_tables = gfd.get_continent_tables()
>>> type(continent_tables)
dict

```

(continues on next page)

(continued from previous page)

```
>>> list(continent_tables.keys())
['Africa',
 'Antarctica',
 'Asia',
 'Australia and Oceania',
 'Central America',
 'Europe',
 'North America',
 'South America']

>>> # Information about the data of subregions in Asia
>>> asia_table = continent_tables['Asia']
>>> len(asia_table) >= 39
True
>>> asia_table.head()
   subregion ... .osm.bz2
0 Afghanistan ... https://download.geofabrik.de/asia/afghanistan...
1 Armenia ... https://download.geofabrik.de/asia/armenia-lat...
2 Azerbaijan ... https://download.geofabrik.de/asia/azerbaijan-...
3 Bangladesh ... https://download.geofabrik.de/asia/bangladesh-...
4 Bhutan ... https://download.geofabrik.de/asia/bhutan-late...
[5 rows x 6 columns]

>>> asia_table.columns.to_list()
['subregion',
 'subregion-url',
 '.osm.pbf',
 '.osm.pbf-size',
 '.shp.zip',
 '.osm.bz2']
```

GeofabrikDownloader.get_default_filename

`GeofabrikDownloader.get_default_filename(subregion_name, osm_file_format, update=False)`
 get a default filename for a geographic (sub)region.

The default filename is derived from the download URL of the requested data file.

Parameters

- `subregion_name` (`str`) – name of a (sub)region available on Geofabrik free download server
- `osm_file_format` (`str`) – file format/extension of the OSM data available on the download server
- `update` (`bool`) – whether to (check on and) update the prepacked data, defaults to False

Returns

default OSM filename for the `subregion_name`

Return type

`str` | `None`

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> gfd = GeofabrikDownloader()

>>> # Default filename of the PBF data of London
>>> subrgn_name, file_format = 'london', ".pbf"
>>> default_fn = gfd.get_default_filename(subrgn_name, file_format)
>>> default_fn
'greater-london-latest.osm.pbf'

>>> # Default filename of the shapefile data of Great Britain
>>> subrgn_name, file_format = 'britain', ".shp"
>>> default_fn = gfd.get_default_filename(subrgn_name, file_format)
No .shp.zip data is available to download for Great Britain.
>>> default_fn is None
True
```

GeofabrikDownloader.get_default.pathname

`GeofabrikDownloader.get_default.pathname(subregion_name, osm_file_format, mkdir=False, update=False, verbose=False)`

Get the default pathname of a local directory for storing a downloaded data file.

The default file path is derived from the download URL of the requested data file.

Parameters

- `subregion_name (str)` – name of a (sub)region available on Geofabrik free download server
- `osm_file_format (str)` – file format/extension of the OSM data available on the download server
- `mkdir (bool)` – whether to create a directory, defaults to False
- `update (bool)` – whether to (check on and) update the prepacked data, defaults to False
- `verbose (bool / int)` – whether to print relevant information in console, defaults to False

Returns

default filename of the subregion and default (absolute) path to the file

Return type

`Tuple[str, str]`

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> import os

>>> gfd = GeofabrikDownloader()

>>> # Default filename and download path of the PBF data of London
>>> subrgn_name, file_format = 'london', ".pbf"
```

(continues on next page)

(continued from previous page)

```
>>> pathname, filename = gfd.get_default_pathname(subrgn_name, file_format)
>>> os.path.relpath(os.path.dirname(pathname))
'osm_data\geofabrik\europe\great-britain\england\greater-london'
>>> filename
'greater-london-latest.osm.pbf'
```

GeofabrikDownloader.get_download_index

`GeofabrikDownloader.get_download_index(update=False, confirmation_required=True, verbose=False)`

Get the official index of downloads for all available geographic (sub)regions.

Similar to the method `get_catalogue()`.

Parameters

- `update (bool)` – whether to (check on and) update the prepacked data, defaults to False
- `confirmation_required (bool)` – whether asking for confirmation to proceed, defaults to True
- `verbose (bool / int)` – whether to print relevant information in console, defaults to False

Returns

the official index of all downloads

Return type

`pandas.DataFrame | None`

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> gfd = GeofabrikDownloader()
>>> # Official index of all available downloads
>>> geofabrik_dwnld_idx = gfd.get_download_index()
>>> type(geofabrik_dwnld_idx)
pandas.core.frame.DataFrame
>>> geofabrik_dwnld_idx.head()
   id ... updates
0 afghanistan ... https://download.geofabrik.de/asia/afghanistan...
1 africa ... https://download.geofabrik.de/africa-updates
2 albania ... https://download.geofabrik.de/europe/albania-u...
3 alberta ... https://download.geofabrik.de/north-america/ca...
4 algeria ... https://download.geofabrik.de/africa/algeria-u...
[5 rows x 13 columns]

>>> geofabrik_dwnld_idx.columns.to_list()
['id',
 'parent',
 'iso3166-1:alpha2',
 'name',
 'iso3166-2',
```

(continues on next page)

(continued from previous page)

```
'geometry',
'.osm.pbf',
'.osm.bz2',
'.shp.zip',
'pbf-internal',
'history',
'taginfo',
'updates']
```

GeofabrikDownloader.get_raw_directory_index

classmethod GeofabrikDownloader.get_raw_directory_index(*url*, *verbose=False*)

Get a raw directory index (including download information of older file logs).

Parameters

- **url** (*str*) – URL of a web page of a data resource (e.g. a subregion)
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False

Returns

information of raw directory index

Return type

pandas.DataFrame | None

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> gfd = GeofabrikDownloader()

>>> homepage_url = gfd.URL
>>> homepage_url
'https://download.geofabrik.de/'

>>> raw_index = gfd.get_raw_directory_index(homepage_url, verbose=True)
Collecting the raw directory index on 'https://download.geofabrik.de/' ... Failed.
No raw directory index is available on the web page.

>>> raw_index is None
True

>>> great_britain_url = 'https://download.geofabrik.de/europe/great-britain.html'
>>> raw_index = gfd.get_raw_directory_index(great_britain_url)
>>> type(raw_index)
pandas.core.frame.DataFrame
>>> raw_index.columns.tolist()
['file', 'date', 'size', 'metric_file_size', 'url']
```

GeofabrikDownloader.get_region_subregion_tier

```
GeofabrikDownloader.get_region_subregion_tier(update=False,
                                              confirmation_required=True,
                                              verbose=False)
```

Get region-subregion tier and all (sub)regions that have no subregions.

This includes all geographic (sub)regions for which data of subregions is unavailable.

Parameters

- **update** (*bool*) – whether to (check on and) update the prepacked data, defaults to False
- **confirmation_required** (*bool*) – whether asking for confirmation to proceed, defaults to True
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False

Returns

region-subregion tier and all (sub)regions that have no subregions

Return type

tuple[dict, list] | tuple[None, None]

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> gfd = GeofabrikDownloader()

>>> # region-subregion tier, and all regions that have no subregions
>>> rgn_subrgn_tier, no_subrgn_list = gfd.get_region_subregion_tier()
>>> type(rgn_subrgn_tier)
dict
>>> # Keys of the region-subregion tier
>>> list(rgn_subrgn_tier.keys())
['Africa',
 'Antarctica',
 'Asia',
 'Australia and Oceania',
 'Central America',
 'Europe',
 'North America',
 'South America']

>>> type(no_subrgn_list)
list
>>> # Example: five regions that have no subregions
>>> no_subrgn_list[0:5]
['Antarctica', 'Algeria', 'Angola', 'Benin', 'Botswana']
```

GeofabrikDownloader.get_subregion_download_url

```
GeofabrikDownloader.get_subregion_download_url(subregion_name, osm_file_format,
                                              update=False, verbose=False)
```

Get a download URL of a geographic (sub)region.

Parameters

- **subregion_name** (*str*) – name of a (sub)region available on Geofabrik free download server
- **osm_file_format** (*str*) – file format/extension of the OSM data available on the download server
- **update** (*bool*) – whether to (check on and) update the prepacked data, defaults to False
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False

Returns

name and URL of the subregion

Return type

Tuple[str, str | None]

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader

>>> gfd = GeofabrikDownloader()

>>> subrgn_name = 'England'
>>> file_format = ".pbf"
>>> valid_name, dwnld_link = gfd.get_subregion_download_url(subrgn_name, file_format)
>>> valid_name # The name of the subregion on the free downloader server
'England'
>>> dwnld_link # The URL of the PBF data file
'https://download.geofabrik.de/europe/great-britain/england-latest.osm.pbf'

>>> subrgn_name = 'britain'
>>> file_format = ".shp"
>>> valid_name, dwnld_link = gfd.get_subregion_download_url(subrgn_name, file_format)
>>> valid_name
'Great Britain'
>>> dwnld_link is None # The URL of the shapefile for Great Britain is not available
True
```

GeofabrikDownloader.get_subregion_table

classmethod GeofabrikDownloader.**get_subregion_table**(*url*, *verbose=False*)

Get download information of all geographic (sub)regions on a web page.

Parameters

- **url** (*str*) – URL of a subregion's web page
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False

Returns

download information of all available subregions on the given url

Return type

pandas.DataFrame | None

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader

>>> gfd = GeofabrikDownloader()

>>> # Download information on the homepage
>>> homepage = gfd.get_subregion_table(url=gfd.URL)
>>> homepage
   subregion ...
0      Africa ...
1  Antarctica ...
2       Asia ...
3 Australia and Oceania ...
4   Central America ...
5        Europe ...
6    North America ...
7     South America ...
[8 rows x 6 columns]

>>> homepage.columns.to_list()
['subregion',
 'subregion-url',
 '.osm.pbf',
 '.osm.pbf-size',
 '.shp.zip',
 '.osm.bz2']

>>> # Download information about 'Great Britain'
>>> great_britain_url = 'https://download.geofabrik.de/europe/great-britain.html'
>>> great_britain = gfd.get_subregion_table(great_britain_url)
>>> great_britain
   subregion ...
0    England ...
1   Scotland ...
2     Wales ...
[3 rows x 6 columns]

>>> # Download information about 'Antarctica'
>>> antarctica_url = 'https://download.geofabrik.de/antarctica.html'
>>> antarctica = gfd.get_subregion_table(antarctica_url, verbose=True)
Compiling information about subregions of "Antarctica" ... Failed.
```

(continues on next page)

(continued from previous page)

```
>>> antarctica is None
True

>>> # To get more information about the above failure, set `verbose=2`
>>> antarctica2 = gfd.get_subregion_table(antarctica_url, verbose=2)
Compiling information about subregions of "Antarctica" ... Failed.
No subregion data is available for "Antarctica" on Geofabrik's free download server.
>>> antarctica2 is None
True
```

GeofabrikDownloader.get_subregions

`GeofabrikDownloader.get_subregions(*subregion_name, deep=False)`

Retrieve names of all subregions (if any) of the given geographic (sub)region(s).

The returned result is based on the region-subregion tier structured by the method `get_region_subregion_tier()`.

See also [RNS-1].

Parameters

- `subregion_name (str / None)` – name of a (sub)region, or names of (sub)regions, available on Geofabrik free download server
- `deep (bool)` – whether to get subregion names of the subregions, defaults to False

Returns

name(s) of subregion(s) of the given geographic (sub)region or (sub)regions; when `subregion_name=None`, it returns all (sub)regions that have subregions

Return type

list

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader

>>> gfd = GeofabrikDownloader()

>>> # Names of all subregions
>>> all_subrgn_names = gfd.get_subregions()
>>> type(all_subrgn_names)
list

>>> # Names of all subregions of England and North America
>>> e_na_subrgn_names = gfd.get_subregions('england', 'n america')
>>> type(e_na_subrgn_names)
list

>>> # Names of all subregions of North America
>>> na_subrgn_names = gfd.get_subregions('n america', deep=True)
>>> type(na_subrgn_names)
list
```

(continues on next page)

(continued from previous page)

```
>>> # Names of subregions of Great Britain
>>> gb_subrgn_names = gfd.get_subregions('britain')
>>> len(gb_subrgn_names) == 3
True

>>> # Names of all subregions of Great Britain's subregions
>>> gb_subrgn_names_ = gfd.get_subregions('britain', deep=True)
>>> len(gb_subrgn_names_) >= len(gb_subrgn_names)
True
```

GeofabrikDownloader.get_valid_download_info

`GeofabrikDownloader.get_valid_download_info(subregion_name, osm_file_format, download_dir=None, **kwargs)`

Get information of downloading (or downloaded) data file.

The information includes a valid subregion name, a default filename, a URL and an absolute path where the data file is (to be) saved locally.

Parameters

- `subregion_name (str)` – name of a (sub)region available on GeofabrikDownloader free download server
- `osm_file_format (str)` – file format/extension of the OSM data available on the download server
- `download_dir (str / None)` – directory for saving the downloaded file(s), defaults to None; when `download_dir=None`, it refers to the method `cdd()`
- `kwargs` – [optional] parameters of `pyhelpers.dirs.cd()`, including `mkdir```(default: ```False`)

Returns

valid subregion name, filename, download url and absolute file path

Return type

`Tuple[str, str, str, str]`

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> import os

>>> gfd = GeofabrikDownloader()

>>> subrgn_name = 'london'
>>> file_format = "pbf"

>>> # valid subregion name, filename, download url and absolute file path
>>> info1 = gfd.get_valid_download_info(subrgn_name, file_format)
>>> valid_subrgn_name, pbf_filename, dwnld_url, path_to_pbf = info1

>>> valid_subrgn_name
'Greater London'
>>> pbf_filename
```

(continues on next page)

(continued from previous page)

```
'greater-london-latest.osm.pbf'
>>> os.path.dirname(dwnld_url)
'https://download.geofabrik.de/europe/great-britain/england'
>>> os.path.relpath(os.path.dirname(path_to_pbf))
'osm_data\geofabrik\europ\great-britain\england\greater-london'

>>> # Specify a new directory for downloaded data
>>> dwnld_dir = "tests\osm_data"

>>> info2 = gfd.get_valid_download_info(subrgn_name, file_format, dwnld_dir)
>>> _, _, _, path_to_pbf2 = info2

>>> os.path.relpath(os.path.dirname(path_to_pbf2))
'tests\osm_data\greater-london'

>>> gfd_ = GeofabrikDownloader(download_dir=dwnld_dir)

>>> info3 = gfd_.get_valid_download_info(subrgn_name, file_format)
>>> _, _, _, path_to_pbf3 = info3

>>> os.path.relpath(os.path.dirname(path_to_pbf3))
'tests\osm_data\europ\great-britain\england\greater-london'
```

GeofabrikDownloader.get_valid_subregion_names

`GeofabrikDownloader.get_valid_subregion_names(update=False,
confirmation_required=True,
verbose=False)`

Get names of all available geographic (sub)regions.

Parameters

- **update (bool)** – whether to (check on and) update the prepacked data, defaults to False
- **confirmation_required (bool)** – whether asking for confirmation to proceed, defaults to True
- **verbose (bool / int)** – whether to print relevant information in console, defaults to False

Returns

names of all geographic (sub)regions available on Geofabrik free download server

Return type

set | None

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> gfd = GeofabrikDownloader()
>>> # A list of the names of available geographic (sub)regions
```

(continues on next page)

(continued from previous page)

```
>>> valid_subrgn_names = gfd.get_valid_subregion_names()
>>> type(valid_subrgn_names)
set
```

GeofabrikDownloader.specify_sub_download_dir

`GeofabrikDownloader.specify_sub_download_dir(subregion_name, osm_file_format,
download_dir=None, **kwargs)`

Specify a directory for downloading data of all subregions of a geographic (sub)region.

This is useful when the specified format of the data of a geographic (sub)region is not available at Geofabrik free download server.

Parameters

- `subregion_name` (`str`) – name of a (sub)region available on Geofabrik free download server
- `osm_file_format` (`str`) – file format/extension of the OSM data available on the download server
- `download_dir` (`str / None`) – directory for saving the downloaded file(s), defaults to `None`; when `download_dir=None`, it refers to the method `cdd()`
- `kwargs` – [optional] parameters of `pyhelpers.dirs.cd()`, including `mkdir``` (default: `False`)

Returns

pathname of a download directory for downloading data of all subregions of the specified (sub)region and format

Return type

`str`

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> import os

>>> gfd = GeofabrikDownloader()

>>> subrgn_name = 'london'
>>> file_format = ".pbf"

>>> # Default download directory (if the requested data file is not available)
>>> dwld_dir = gfd.specify_sub_download_dir(subrgn_name, file_format)
>>> os.path.dirname(os.path.relpath(dwld_dir))
'osm_data\geofabrik\europe\great-britain\england\greater-london'

>>> # When a download directory is specified
>>> dwld_dir = "tests\osm_data"

>>> subrgn_name = 'britain'
>>> file_format = ".shp"

>>> dwld_pathname = gfd.specify_sub_download_dir(subrgn_name, file_format, dwld_dir)
```

(continues on next page)

(continued from previous page)

```
>>> os.path.relpath(dwnld_pathname)
'tests\osm_data\great-britain-shp-zip'

>>> gfd_ = GeofabrikDownloader(download_dir=dwnld_dir)
>>> dwnld_pathname_ = gfd_.specify_sub_download_dir(subrgn_name, file_format)
>>> os.path.relpath(dwnld_pathname_)
'tests\osm_data\europe\great-britain-shp-zip'
```

GeofabrikDownloader.validate_file_format

`GeofabrikDownloader.validate_file_format(osm_file_format, **kwargs)`

Validate an input file format of OSM data.

The validation is done by matching the input to a filename extension available on Geofabrik free download server.

Parameters

- `osm_file_format (str)` – file format/extension of the OSM data on the free download server
- `kwargs` – [optional] parameters of `pyhelpers.text.find_similar_str()`

Returns

formal file format

Return type

str

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader

>>> gfd = GeofabrikDownloader()

>>> input_file_format = ".pbf"
>>> valid_file_format = gfd.validate_file_format(osm_file_format=input_file_format)
>>> valid_file_format
'.osm.pbf'

>>> input_file_format = "shp"
>>> valid_file_format = gfd.validate_file_format(osm_file_format=input_file_format)
>>> valid_file_format
'.shp.zip'
```

GeofabrikDownloader.validate_subregion_name

`GeofabrikDownloader.validate_subregion_name(subregion_name, **kwargs)`

Validate an input name of a geographic (sub)region.

The validation is done by matching the input to a name of a geographic (sub)region available on Geofabrik free download server.

Parameters

- `subregion_name (str)` – name/URL of a (sub)region available on Geofabrik free download server
- `kwargs` – [optional] parameters of `pyhelpers.text.find_similar_str()`

Returns

valid subregion name that matches (or is the most similar to) the input

Return type

`str`

Examples:

```
>>> from pydriosm.downloader import GeofabrikDownloader

>>> gfd = GeofabrikDownloader()

>>> input_subrgn_name = 'london'
>>> valid_subrgn_name = gfd.validate_subregion_name(subregion_name=input_subrgn_name)
>>> valid_subrgn_name
'Greater London'

>>> input_subrgn_name = 'https://download.geofabrik.de/europe/great-britain.html'
>>> valid_subrgn_name = gfd.validate_subregion_name(subregion_name=input_subrgn_name)
>>> valid_subrgn_name
'Great Britain'
```

BBBikeDownloader

`class pydriosm.downloader.BBBikeDownloader(download_dir=None)`

Download OSM data from BBBike free download server.

Parameters

`download_dir (str / None)` – (a path or a name of) a directory for saving downloaded data files; if `download_dir=None` (default), the downloaded data files are saved into a folder named '`osm_data`' under the current working directory

Variables

- `valid_subregion_names (set)` – names of (sub)regions available on BBBike free download server
- `valid_file_formats (set)` – filename extensions of the data files available on BBBike free download server

- **subregion_index** (*pandas.DataFrame*) – index of download pages for all available (sub)regions
- **catalogue** (*pandas.DataFrame*) – a catalogue (index) of all available BBBike downloads
- **download_dir** (*str / None*) – name or pathname of a directory for saving downloaded data files (in accordance with the parameter `download_dir`)
- **data_pathnames** (*list*) – list of pathnames of all downloaded data files

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader
>>> import os

>>> bbd = BBBikeDownloader()

>>> bbd.NAME
'BBBike'

>>> bbd.LONG_NAME
'BBBike exports of OpenStreetMap data'

>>> bbd.URL
'https://download.bbbike.org/osm/bbbike/'

>>> os.path.relpath(bbd.download_dir)
'osm_data\bbbike'

>>> bbd = BBBikeDownloader(download_dir="tests\osm_data")
>>> os.path.relpath(bbd.download_dir)
'tests\osm_data'
```

Attributes

<i>CITIES_COORDS_URL</i>	URL of coordinates of all the available cities.
<i>CITIES_URL</i>	URL of a list of cities that are available on the free download server.
<i>DEFAULT_DOWNLOAD_DIR</i>	Default download directory.
<i>FILE_FORMATS</i>	Valid file formats.
<i>LONG_NAME</i>	Full name of the data resource.
<i>NAME</i>	Name of the free downloader server.
<i>URL</i>	URL of the homepage to the free download server.

BBBikeDownloader.CITIES_COORDS_URL

```
BBBikeDownloader.CITIES_COORDS_URL =  
'https://raw.githubusercontent.com/wosch/bbbike-world/world/etc/cities.csv'  
URL of coordinates of all the available cities.
```

BBBikeDownloader.CITIES_URL

```
BBBikeDownloader.CITIES_URL =  
'https://raw.githubusercontent.com/wosch/bbbike-world/world/etc/cities.txt'  
URL of a list of cities that are available on the free download server.
```

BBBikeDownloader.DEFAULT_DOWNLOAD_DIR

```
BBBikeDownloader.DEFAULT_DOWNLOAD_DIR = 'osm_data\\bbbike'  
Default download directory.
```

BBBikeDownloader.FILE_FORMATS

```
BBBikeDownloader.FILE_FORMATS = {'.csv.xz', '.garmin-onroad-latin1.zip',  
'garmin-onroad.zip', '.garmin-opentopo.zip', '.garmin-osm.zip',  
'geojson.xz', '.gz', '.mapsforge-osm.zip', '.pbf', '.shp.zip',  
'svg-osm.zip'}
```

Valid file formats.

BBBikeDownloader.LONG_NAME

```
BBBikeDownloader.LONG_NAME = 'BBBike exports of OpenStreetMap data'  
Full name of the data resource.
```

BBBikeDownloader.NAME

```
BBBikeDownloader.NAME = 'BBBike'  
Name of the free downloader server.
```

BBBikeDownloader.URL

```
BBBikeDownloader.URL = 'https://download.bbbike.org/osm/bbbike/'  
URL of the homepage to the free download server.
```

Methods

<code>download_osm_data(subregion_names, ...[, ...])</code>	Download OSM data (of a specific file format) of one (or multiple) geographic (sub)region(s).
<code>download_subregion_data(subregion_name[, ...])</code>	Download OSM data of all available formats for a geographic (sub)region.
<code>file_exists(subregion_name, osm_file_format)</code>	Check if a requested data file of a geographic (sub)region already exists locally, given its default filename.
<code>get_catalogue([update, ...])</code>	Get a dict-type index of available formats, data types and a download catalogue.
<code>get_coordinates_of_cities([update, ...])</code>	Get location information of all cities available on the download server.
<code>get_names_of_cities([update, ...])</code>	Get the names of all the available cities.
<code>get_subregion_catalogue(subregion_name[, ...])</code>	Get a download catalogue of OSM data available for a given geographic (sub)region.
<code>get_subregion_download_url(subregion_name, ...)</code>	Get a valid URL for downloading OSM data of a specific file format for a geographic (sub)region.
<code>get_subregion_index([update, ...])</code>	Get a catalogue for geographic (sub)regions.
<code>get_valid_download_info(subregion_name, ...)</code>	Get information of downloading (or downloaded) data file.
<code>get_valid_subregion_names([update, ...])</code>	Get a list of names of all geographic (sub)regions.
<code>validate_file_format(osm_file_format, **kwargs)</code>	Validate an input file format of OSM data.
<code>validate_subregion_name(subregion_name, **kwargs)</code>	Validate an input name of a geographic (sub)region.

BBBikeDownloader.download_osm_data

```
BBBikeDownloader.download_osm_data(subregion_names, osm_file_format, download_dir=None,
                                   update=False, confirmation_required=True,
                                   interval=None, verify_download_dir=True,
                                   verbose=False, ret_download_path=False, **kwargs)
```

Download OSM data (of a specific file format) of one (or multiple) geographic (sub)region(s).

Parameters

- **subregion_names** (`str` / `list`) – name of a geographic (sub)region (or names of multiple geographic (sub)regions) available on BBBike free download server
- **osm_file_format** (`str`) – file format/extension of the OSM data available on the download server
- **download_dir** (`str` / `None`) – directory for saving the downloaded file(s), defaults to `None`; when `download_dir=None`, it refers to the method `cdd()`

- `update (bool)` – whether to update the data if it already exists, defaults to False
- `confirmation_required (bool)` – whether asking for confirmation to proceed, defaults to True
- `interval (int / float / None)` – interval (in second) between downloading two subregions, defaults to None
- `verify_download_dir (bool)` – whether to verify the pathname of the current download directory, defaults to True
- `verbose (bool / int)` – whether to print relevant information in console, defaults to False
- `ret_download_path (bool)` – whether to return the path(s) to the downloaded file(s), defaults to False

Returns

the path(s) to the downloaded file(s) when `ret_download_path` is True

Return type

list | str

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader
>>> from pyhelpers.dirs import delete_dir
>>> import os

>>> bbd = BBBikeDownloader()

>>> # Download BBBike PBF data of London
>>> subrgn_name = 'London'
>>> file_format = "pbf"

>>> bbd.download_osm_data(subrgn_name, file_format, verbose=True)
To download .pbf data of the following geographic (sub)region(s):
    London
? [No]|Yes: yes
Downloading "London.osm.pbf"
    to "osm_data\bbbike\london\" ... Done.

>>> len(bbd.data_paths)
1
>>> os.path.relpath(bbd.data_paths[0])
'osm_data\bbbike\london\London.osm.pbf'

>>> london_dwnld_dir = os.path.relpath(bbd.download_dir)
>>> london_dwnld_dir
'osm_data\bbbike'

>>> # Download PBF data of Leeds and Birmingham to a given directory
>>> subrgn_names = ['leeds', 'birmingham']
>>> dwnld_dir = "tests\osm_data"

>>> dwnld_paths = bbd.download_osm_data(
...     subrgn_names, file_format, dwnld_dir, verbose=True, ret_download_path=True)
To download .pbf data of the following geographic (sub)region(s):
    Leeds
```

(continues on next page)

(continued from previous page)

```

Birmingham
? [No] |Yes: yes
Downloading "Leeds.osm.pbf"
    to "tests\osm_data\leeds\" ... Done.
Downloading "Birmingham.osm.pbf"
    to "tests\osm_data\birmingham\" ... Done.
>>> len(dwnld_paths)
2
>>> len(bbd.data_paths)
3
>>> os.path.relpath(bbd.download_dir) == os.path.relpath(dwnld_dir)
True
>>> os.path.relpath(os.path.commonpath(dwnld_paths))
'tests\osm_data'

>>> # Delete the above download directories
>>> delete_dir([os.path.dirname(london_dwnld_dir), dwnld_dir], verbose=True)
To delete the following directories:
    "osm_data\" (Not empty)
    "tests\osm_data\" (Not empty)
? [No] |Yes: yes
Deleting "osm_data\" ... Done.
Deleting "tests\osm_data\" ... Done.

```

BBBikeDownloader.download_subregion_data

```
BBBikeDownloader.download_subregion_data(subregion_name, download_dir=None,
                                         update=False, confirmation_required=True,
                                         interval=None, verify_download_dir=True,
                                         verbose=False, ret_download_path=False,
                                         **kwargs)
```

Download OSM data of all available formats for a geographic (sub)region.

Parameters

- **subregion_name** (*str*) – name of a (sub)region available on BBBike free download server
- **download_dir** (*str* / *None*) – directory where the downloaded file is saved, defaults to *None*
- **update** (*bool*) – whether to update the data if it already exists, defaults to *False*
- **confirmation_required** (*bool*) – whether asking for confirmation to proceed, defaults to *True*
- **interval** (*int* / *float* / *None*) – interval (in second) between downloading two subregions, defaults to *None*
- **verify_download_dir** (*bool*) – whether to verify the pathname of the current download directory, defaults to *True*
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to *False*

- `ret_download_path (bool)` – whether to return the path(s) to the downloaded file(s), defaults to False
- `kwargs` – optional parameters of `pyhelpers.ops.download_file_from_url()`

Returns

the path(s) to the downloaded file(s) when `ret_download_path` is True

Return type

`list | str`

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader
>>> from pyhelpers.dirs import delete_dir
>>> import os

>>> bbd = BBBikeDownloader()

>>> # Download the BBBike OSM data of Birmingham (to the default download directory)
>>> subrgn_name = 'birmingham'

>>> bbd.download_subregion_data(subrgn_name, verbose=True)
To download all available BBBike OSM data of Birmingham
? [No]|Yes: yes
Downloading:
Birmingham.osm.pbf ... Done.
Birmingham.osm.gz ... Done.
Birmingham.osm.shp.zip ... Done.
Birmingham.osm.garmin-onroad-latin1.zip ... Done.
Birmingham.osm.garmin-osm.zip ... Done.
Birmingham.osm.garmin-ontrail-latin1.zip ... Done.
Birmingham.osm.geojson.xz ... Done.
Birmingham.osm.svg-osm.zip ... Done.
Birmingham.osm.mapsforge-osm.zip ... Done.
Birmingham.osm.garmin-opentopo-latin1.zip ... Done.
Birmingham.osm.mbtiles-openmaptiles.zip ... Done.
Birmingham.osm.csv.xz ... Done.
Birmingham.poly ... Done.
CHECKSUM.txt ... Done.
Check out the downloaded OSM data at "osm_data\bbbike\birmingham".

>>> len(bbd.data_paths)
14
>>> os.path.relpath(os.path.commonpath(bbd.data_paths))
'osm_data\bbbike\birmingham'
>>> os.path.relpath(bbd.download_dir)
'osm_data\bbbike'
>>> bham_dwnld_dir = os.path.dirname(bbd.download_dir)

>>> # Download the BBBike OSM data of Leeds (to a given download directory)
>>> subrgn_name = 'leeds'
>>> dwnld_dir = "tests\osm_data"

>>> dwnld_paths = bbd.download_subregion_data(
...     subrgn_name, download_dir=dwnld_dir, verbose=True, ret_download_path=True)
To download all available BBBike OSM data of Leeds
? [No]|Yes: yes
Downloading:
Leeds.osm.pbf ... Done.
```

(continues on next page)

(continued from previous page)

```

Leeds.osm.gz ... Done.
Leeds.osm.shp.zip ... Done.
Leeds.osm.garmin-onroad-latin1.zip ... Done.
Leeds.osm.garmin-osm.zip ... Done.
Leeds.osm.garmin-ontrail-latin1.zip ... Done.
Leeds.osm.geojson.xz ... Done.
Leeds.osm.svg-osm.zip ... Done.
Leeds.osm.mapsforge-osm.zip ... Done.
Leeds.osm.garmin-opentopo-latin1.zip ... Done.
Leeds.osm.mbtiles-openmaptiles.zip ... Done.
Leeds.osm.csv.xz ... Done.
Leeds.poly ... Done.
CHECKSUM.txt ... Done.

Check out the downloaded OSM data at "tests\osm_data\leeds\".

>>> # Now the variable `download_dir` has changed to `dwnld_dir`
>>> leeds_dwnld_dir = bbd.download_dir
>>> os.path.relpath(leeds_dwnld_dir) == dwnld_dir
True

>>> len(dwnld_paths)
14
>>> len(bbd.data_paths) # New pathnames have been added to `data_paths`
28
>>> os.path.relpath(os.path.commonpath(dwnld_paths))
'tests\osm_data\leeds'

>>> # Delete the download directories
>>> delete_dir([bham_dwnld_dir, leeds_dwnld_dir], verbose=True)
To delete the following directories:
    "osm_data\" (Not empty)
    "tests\osm_data\" (Not empty)
? [No] | Yes: yes
Deleting "osm_data\" ... Done.
Deleting "tests\osm_data\" ... Done.

```

BBBikeDownloader.file_exists

`BBBikeDownloader.file_exists(subregion_name, osm_file_format, data_dir=None, update=False, verbose=False, ret_file_path=False)`

Check if a requested data file of a geographic (sub)region already exists locally, given its default filename.

Parameters

- `subregion_name (str)` – name of a (sub)region available on BBBike free download server
- `osm_file_format (str)` – file format/extension of the OSM data available on the download server
- `data_dir (str / None)` – directory where the data file (or files) is (or are) stored, defaults to None; when `data_dir=None`, it refers to the method `cdd()`
- `update (bool)` – whether to (check and) update the data, defaults to False

- **verbose** (bool / int) – whether to print relevant information in console, defaults to False
- **ret_file_path** (bool) – whether to return the path to the data file (if it exists), defaults to False

Returns

whether the requested data file exists; or the path to the data file

Return type

bool | str

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader
>>> from pyhelpers.dirs import delete_dir
>>> import os

>>> bbd = BBBikeDownloader()

>>> subrgn_name = 'birmingham'
>>> file_format = ".pbf"
>>> dwnld_dir = "tests\osm_data"

>>> # Check whether the PBF data file exists; `ret_file_path` is by default `False`
>>> pbf_exists = bbd.file_exists(subrgn_name, file_format, dwnld_dir)
>>> pbf_exists
False

>>> # Download the PBF data of Birmingham (to the default directory)
>>> bbd.download_osm_data(subrgn_name, file_format, dwnld_dir, verbose=True)
To download .pbf data of the following geographic (sub)region(s):
    Birmingham
? [No]|Yes: yes
Downloading "Birmingham.osm.pbf"
    to "tests\osm_data\birmingham\" ... Done.

>>> bbd.file_exists(subrgn_name, file_format, dwnld_dir)
True

>>> # Set `ret_file_path=True`
>>> pbf_pathname = bbd.file_exists(subrgn_name, file_format, ret_file_path=True)
>>> os.path.relpath(pbf_pathname)
'tests\osm_data\birmingham\Birmingham.osm.pbf'

>>> os.path.relpath(dwnld_dir) == os.path.relpath(bbd.download_dir)
True

>>> # Remove the directory or the PBF file and check again:
>>> delete_dir(bbd.download_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.

>>> # Since the default download directory has been deleted
>>> bbd.file_exists(subrgn_name, file_format, dwnld_dir)
False
```

BBBikeDownloader.get_catalogue

`BBBikeDownloader.get_catalogue(update=False, confirmation_required=True, verbose=False)`

Get a dict-type index of available formats, data types and a download catalogue.

Parameters

- `update (bool)` – whether to (check on and) update the prepacked data, defaults to False
- `confirmation_required (bool)` – whether asking for confirmation to proceed, defaults to True
- `verbose (bool / int)` – whether to print relevant information in console, defaults to False

Returns

a list of available formats, a list of available data types and a dictionary of download catalogue

Return type

dict | None

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader

>>> bbd = BBBikeDownloader()

>>> # Index for downloading OSM data available on the BBBike free download server
>>> bbbike_catalogue = bbd.get_catalogue()

>>> list(bbbike_catalogue.keys())
['FileFormat', 'DataType', 'Catalogue']

>>> catalogue = bbbike_catalogue['Catalogue']
>>> type(catalogue)
dict

>>> bham_catalogue = catalogue['Birmingham']
>>> type(bham_catalogue)
pandas.core.frame.DataFrame
```

BBBikeDownloader.get_coordinates_of_cities

`classmethod BBBikeDownloader.get_coordinates_of_cities(update=False, confirmation_required=True, verbose=False)`

Get location information of all cities available on the download server.

Parameters

- `update (bool)` – whether to (check on and) update the prepacked data, defaults to False
- `confirmation_required (bool)` – whether asking for confirmation to proceed, defaults to True

- **verbose** (bool / int) – whether to print relevant information in console, defaults to False

Returns

location information of BBBike cities, i.e. geographic (sub)regions

Return type

pandas.DataFrame | None

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader

>>> bbd = BBBikeDownloader()

>>> # Location information of BBBike cities
>>> coords_of_cities = bbd.get_coordinates_of_cities()

>>> type(coords_of_cities)
pandas.core.frame.DataFrame
>>> coords_of_cities.head()
   City ... ur_latitude
0 Aachen ... 50.99
1 Aarhus ... 56.287
2 Adelaide ... -34.753
3 Albuquerque ... 35.2173
4 Alexandria ... 31.34
[5 rows x 13 columns]

>>> coords_of_cities.columns.to_list()
['city',
 'real_name',
 'pref._language',
 'local_language',
 'country',
 'area_or_continent',
 'population',
 'step',
 'other_cities',
 'll_longitude',
 'll_latitude',
 'ur_longitude',
 'ur_latitude']
```

[BBBikeDownloader.get_names_of_cities](#)

```
classmethod BBBikeDownloader.get_names_of_cities(update=False,
                                                confirmation_required=True,
                                                verbose=False)
```

Get the names of all the available cities.

This can be an alternative to the method `get_valid_subregion_names()`.

Parameters

- **update** (bool) – whether to (check on and) update the prepacked data, defaults to False

- **confirmation_required** (*bool*) – whether asking for confirmation to proceed, defaults to True
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False

Returns

list of names of cities available on BBBike free download server

Return type

list | None

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader
>>> bbd = BBBikeDownloader()
>>> # A list of BBBike cities' names
>>> bbbike_cities = bbd.get_names_of_cities()
>>> type(bbbike_cities)
list
```

BBBikeDownloader.get_subregion_catalogue

`BBBikeDownloader.get_subregion_catalogue(subregion_name, confirmation_required=True, verbose=False)`

Get a download catalogue of OSM data available for a given geographic (sub)region.

Parameters

- **subregion_name** (*str*) – name of a (sub)region available on BBBike free download server
- **confirmation_required** (*bool*) – whether asking for confirmation to proceed, defaults to True
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False

Returns

a catalogues for subregion downloads

Return type

pandas.DataFrame | None

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader
>>> bbd = BBBikeDownloader()
>>> subrgn_name = 'birmingham'
>>> # A download catalogue for Leeds
>>> bham_dwnld_cat = bbd.get_subregion_catalogue(subrgn_name, verbose=True)
To compile data of a download catalogue for "Birmingham"
```

(continues on next page)

(continued from previous page)

```
? [No]|Yes: yes
Compiling the data ... Done.
>>> type(bham_dwnld_cat)
pandas.core.frame.DataFrame
>>> bham_dwnld_cat.columns.tolist()
['filename', 'url', 'data_type', 'size', 'last_update']
```

BBBikeDownloader.get_subregion_download_url

`BBBikeDownloader.get_subregion_download_url(subregion_name, osm_file_format, **kwargs)`

Get a valid URL for downloading OSM data of a specific file format for a geographic (sub)region.

Parameters

- `subregion_name (str)` – name of a (sub)region available on BBBike free download server
- `osm_file_format (str)` – file format/extension of the OSM data available on the download server

Returns

a valid name of `subregion_name` and a download URL for the given `osm_file_format`

Return type

`tuple`

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader

>>> bbd = BBBikeDownloader()

>>> subrgn_name = 'birmingham'
>>> file_format = "pbf"

>>> # Get a valid subregion name and its download URL
>>> subrgn_name_, dwnld_url = bbd.get_subregion_download_url(subrgn_name, file_format)
>>> subrgn_name_
'Birmingham'
>>> dwnld_url
'https://download.bbbike.org/osm/bbbike/Birmingham.Birmingham.osm.pbf'

>>> file_format = "csv.xz"
>>> subrgn_name_, dwnld_url = bbd.get_subregion_download_url(subrgn_name, file_format)

>>> subrgn_name_
'Birmingham'
>>> dwnld_url
'https://download.bbbike.org/osm/bbbike/Birmingham.Birmingham.osm.csv.xz'
```

BBBikeDownloader.get_subregion_index

```
classmethod BBBikeDownloader.get_subregion_index(update=False,
confirmation_required=True,
verbose=False)
```

Get a catalogue for geographic (sub)regions.

Parameters

- **update** (*bool*) – whether to (check on and) update the prepacked data, defaults to False
- **confirmation_required** (*bool*) – whether asking for confirmation to proceed, defaults to True
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False

Returns

catalogue for subregions of BBBike data

Return type

pandas.DataFrame | None

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader
>>> bbd = BBBikeDownloader()
>>> # A BBBike catalogue of geographic (sub)regions
>>> subrgn_idx = bbd.get_subregion_index()
>>> type(subrgn_idx)
pandas.core.frame.DataFrame
>>> subrgn_idx.columns.to_list()
['name', 'last_modified', 'url']
```

BBBikeDownloader.get_valid_download_info

```
BBBikeDownloader.get_valid_download_info(subregion_name, osm_file_format,
download_dir=None, **kwargs)
```

Get information of downloading (or downloaded) data file.

The information includes a valid subregion name, a default filename, a URL and an absolute path where the data file is (to be) saved locally.

Parameters

- **subregion_name** (*str*) – name of a (sub)region available on BBBike free download server
- **osm_file_format** (*str*) – file format/extension of the OSM data available on the download server
- **download_dir** (*str* / *None*) – directory for saving the downloaded file(s), defaults to None; when *download_dir=None*, it refers to the method *cdd()*

- **kwargs** – [optional] parameters of `pyhelpers.dirs.cd()`, including `mkdir`

Returns

valid subregion name, filename, download url and absolute file path

Return type

tuple

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader
>>> import os

>>> bbd = BBBikeDownloader()

>>> subrgn_name = 'birmingham'
>>> file_format = "pbf"

>>> # valid subregion name, filename, download url and absolute file path
>>> info = bbd.get_valid_download_info(subrgn_name, file_format)
>>> valid_subrgn_name, pbf_filename, dwnld_url, pbf_pathname = info

>>> valid_subrgn_name
'Birmingham'
>>> pbf_filename
'Birmingham.osm.pbf'
>>> dwnld_url
'https://download.bbbike.org/osm/bbbike/Birmingham/Birmingham.osm.pbf'
>>> os.path.relpath(pbf_pathname)
'osm_data\bbbike\birmingham\Birmingham.osm.pbf'

>>> # Create a new instance with a given download directory
>>> bbd = BBBikeDownloader(download_dir="tests\osm_data")
>>> _, _, _, pbf_pathname = bbd.get_valid_download_info(subrgn_name, file_format)

>>> os.path.relpath(pbf_pathname)
'tests\osm_data\birmingham\Birmingham.osm.pbf'
```

BBBikeDownloader.get_valid_subregion_names

```
classmethod BBBikeDownloader.get_valid_subregion_names(update=False,
confirmation_required=True,
verbose=False)
```

Get a list of names of all geographic (sub)regions.

This can be an alternative to the method `get_names_of_cities()`.

Parameters

- **update** (`bool`) – whether to (check on and) update the prepacked data, defaults to False
- **confirmation_required** (`bool`) – whether asking for confirmation to proceed, defaults to True
- **verbose** (`bool / int`) – whether to print relevant information in console, defaults to False

Returns

a list of geographic (sub)region names available on BBBike free download server

Return type

list | None

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader
>>> bbd = BBBikeDownloader()
>>> # A list of names of all BBBike geographic (sub)regions
>>> subrgn_names = bbd.get_valid_subregion_names()
>>> type(subrgn_names)
list
```

BBBikeDownloader.validate_file_format

`BBBikeDownloader.validate_file_format(osm_file_format, **kwargs)`

Validate an input file format of OSM data.

The validation is done by matching the input `osm_file_format` to a filename extension available on BBBike free download server.

Parameters

`osm_file_format (str)` – file format/extension of the OSM data available on BBBike free download server

Returns

valid file format (file extension)

Return type

str

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader
>>> bbd = BBBikeDownloader()
>>> valid_file_format = bbd.validate_file_format(osm_file_format='PBF')
>>> valid_file_format
'.pbf'
>>> valid_file_format = bbd.validate_file_format(osm_file_format='.osm.pbf')
>>> valid_file_format
'.pbf'
```

BBBikeDownloader.validate_subregion_name

`BBBikeDownloader.validate_subregion_name(subregion_name, **kwargs)`

Validate an input name of a geographic (sub)region.

The validation is done by matching the input `subregion_name` to a name of a geographic (sub)region available on BBBike free download server.

Parameters

`subregion_name (str)` – name of a (sub)region available on BBBike free download server

Returns

valid (sub)region name that matches, or is the most similar to, the input

Return type

`str`

Examples:

```
>>> from pydriosm.downloader import BBBikeDownloader
>>> bbd = BBBikeDownloader()
>>> subrgn_name = 'birmingham'
>>> valid_name = bbd.validate_subregion_name(subregion_name=subrgn_name)
>>> valid_name
'Birmingham'
```

3.2 reader

Read the OSM data extracts in various file formats.

3.2.1 Parsing / transforming data

<code>Transformer()</code>	Transform / reformat data.
<code>PBFReadParse()</code>	Read/parse PBF data.
<code>SHPRReadParse()</code>	Read/parse Shapefile data.
<code>VarReadParse()</code>	Read/parse OSM data of various formats (other than PBF and Shapefile).

Transformer

```
class pydriosm.reader.Transformer  
    Transform / reformat data.
```

Examples:

```
>>> from pydriosm.reader import Transformer  
  
>>> geometry = {'type': 'Point', 'coordinates': [-0.5134241, 52.6555853]}  
>>> geometry_ = Transformer.transform_unitary_geometry(geometry)  
>>> type(geometry_)  
shapely.geometry.point.Point  
>>> geometry_.wkt  
'POINT (-0.5134241 52.6555853)'
```

Methods

<code>point_as_polygon(multi_poly_coords)</code>	Make the coordinates of a single 'Point' (in a 'MultiPolygon') be reformatted to a 'Polygon'-like coordinates.
<code>transform_geometry(layer_data, layer_name)</code>	Reformat the field of 'geometry' into <code>shapely.geometry</code> object.
<code>transform_geometry_collection(geometry[, ...])</code>	Transform a collection of geometry from dict into a <code>shapely.geometry</code> object.
<code>transform_other_tags(other_tags)</code>	Reformat a 'other_tags' from string into dictionary type.
<code>transform_unitary_geometry(geometry[, mode, ...])</code>	Transform a unitary geometry from dict into a <code>shapely.geometry</code> object.
<code>update_other_tags(prop_or_feat[, mode])</code>	Update the original data of 'other_tags' with parsed data.

Transformer.point_as_polygon

```
classmethod Transformer.point_as_polygon(multi_poly_coords)
```

Make the coordinates of a single 'Point' (in a 'MultiPolygon') be reformatted to a 'Polygon'-like coordinates.

The list of coordinates of some 'MultiPolygon' features may contain single points. In order to reformat such multipart geometry (from dict into `shapely.geometry` type), there is a need to ensure each of the constituent parts is a `shapely.geometry.Polygon`.

Parameters

`multi_poly_coords (list)` – original data of coordinates of a `shapely.geometry.MultiPolygon` feature

Returns

coordinates that are reformatted as appropriate

Return type

list

Examples:

```
>>> from pydriosm.reader import Transformer

>>> geometry = {
...     'type': 'MultiPolygon',
...     'coordinates': [[[[-0.6920145, 52.6753268], [-0.6920145, 52.6753268]]]]
... }
>>> mp_coords = geometry['coordinates']

>>> mp_coords_ = Transformer.point_as_polygon(mp_coords)
>>> mp_coords_
[[[-0.6920145, 52.6753268],
 [-0.6920145, 52.6753268],
 [-0.6920145, 52.6753268]]]
```

Transformer.transform_geometry

classmethod `Transformer.transform_geometry(layer_data, layer_name)`

Reformat the field of 'geometry' into `shapely.geometry` object.

Parameters

- `layer_data` (`pandas.DataFrame` / `pandas.Series`) – dataframe of a specific layer of PBF data
- `layer_name` (`str`) – name (geometric type) of the PBF layer

Returns

(OSM feature with) reformatted geometry field

Return type

`pandas.DataFrame` | `pandas.Series`

Examples:

```
>>> from pydriosm.reader import Transformer

>>> # An example of points layer data
>>> lyr_name = 'points'
>>> dat_ = {
...     'type': 'Feature',
...     'geometry': {
...         'type': 'Point',
...         'coordinates': [-0.5134241, 52.6555853]
...     },
...     'properties': {
...         'osm_id': '488432',
...         'name': None,
...         'barrier': None,
...         'highway': None,
...         'ref': None,
...         'address': None,
...         'is_in': None,
...         'place': None,
...         'man_made': None,
...         'other_tags': '"odbl"=>"clean"'
...     },
... }
```

(continues on next page)

(continued from previous page)

```

...     'id': 488432
...
>>> lyr_data = pd.DataFrame.from_dict(dat_, orient='index').T

>>> geom_dat = Transformer.transform_geometry(layer_data=lyr_data, layer_name=lyr_name)
>>> geom_dat
0    POINT (-0.5134241 52.6555853)
Name: geometry, dtype: object

```

See also:

- Examples for the method `PBFRReadParse.read_pbf()`.

Transformer.transform_geometry_collection

classmethod `Transformer.transform_geometry_collection(geometry, mode=1, to_wkt=False)`

Transform a collection of geometry from dict into a `shapely.geometry` object.

Parameters

- **geometry** (*list* / *dict*) – geometry data for a feature of `GeometryCollection`
- **mode** (*int*) – indicate the way of parsing the input;
 - when mode=1 (**default**), the input geometry should be directly accessible and would be in the format of `{'type': <shape type>, 'coordinates': <coordinates>}` or as a row of a `pandas.DataFrame`;
 - when mode=2, the input geometry is in the `GeoJSON` format
- **to_wkt** (*bool*) – whether to represent the geometry in the WKT (well-known text) format, defaults to False

Returns

reformatted geometry data

Return type

`shapely.geometry.base.HeterogeneousGeometrySequence` | `dict` | `str`

Examples:

```

>>> from pydriosm.reader import PBFRReadParse
>>> from shapely.geometry import GeometryCollection

>>> g1_dat_ = {
...     'type': 'GeometryCollection',
...     'geometries': [
...         {'type': 'Point', 'coordinates': [-0.5096176, 52.6605168]},
...         {'type': 'Point', 'coordinates': [-0.5097337, 52.6605812]}
...     ]
... }
>>> g1_dat = g1_dat_[‘geometries’]
>>> g1_data = PBFRReadParse.transform_geometry_collection(g1_dat)
>>> type(g1_data)

```

(continues on next page)

(continued from previous page)

```

shapely.geometry.base.HeterogeneousGeometrySequence
>>> GeometryCollection(list(g1_data)).wkt
'GEOMETRYCOLLECTION (POINT (-0.5096176 52.6605168), POINT (-0.5097337 52.6605812))'

>>> g2_dat = {
...     'type': 'Feature',
...     'geometry': {
...         'type': 'GeometryCollection',
...         'geometries': [
...             {'type': 'Point', 'coordinates': [-0.5096176, 52.6605168]},
...             {'type': 'Point', 'coordinates': [-0.5097337, 52.6605812]}]
...     },
...     'properties': {
...         'osm_id': '256254',
...         'name': 'Fife Close',
...         'type': 'site',
...         'other_tags': '"naptan:StopAreaCode"=>"270G02701525"'
...     },
...     'id': 256254
... }
>>> g2_data = PBFReadParse.transform_geometry_collection(g2_dat, mode=2)
>>> type(g2_data)
dict
>>> list(g2_data.keys())
['type', 'geometry', 'properties', 'id']
>>> g2_data['geometry']
'GEOMETRYCOLLECTION (POINT (-0.5096176 52.6605168), POINT (-0.5097337 52.6605812))'

```

Transformer.transform_other_tags

classmethod `Transformer.transform_other_tags(other_tags)`

Reformat a 'other_tags' from string into dictionary type.

Parameters

`other_tags (str / None)` – data of 'other_tags' of a single feature in a PBF data file

Returns

reformatted data of 'other_tags'

Return type

dict | None

Examples:

```

>>> from pydriosm.reader import Transformer

>>> other_tags_dat = Transformer.transform_other_tags(other_tags='"odbl"=>"clean"')
>>> other_tags_dat
{'odbl': 'clean'}

```

See also:

- Examples for the method `PBFReadParse.read_pbf()`.

Transformer.transform_unitary_geometry

classmethod Transformer.**transform_unitary_geometry**(*geometry*, *mode=1*, *to_wkt=False*)

Transform a unitary geometry from dict into a shapely.geometry object.

Parameters

- **geometry** (*dict* / *pandas.DataFrame*) – geometry data for a feature of one of the geometry types including 'Point', 'LineString', 'MultiLineString' and 'MultiPolygon'
- **mode** (*int*) – indicate the way of parsing the input;
 - when mode=1 (**default**), the input geometry should be directly accessible and would be in the format of {'type': <shape type>, 'coordinates': <coordinates>} or as a row of a *pandas.DataFrame*;
 - when mode=2, the input geometry is in the **GeoJSON** format
- **to_wkt** (*bool*) – whether to represent the geometry in the WKT (well-known text) format, defaults to False

Returns

reformatted geometry data

Return type

shapely.geometry.Point | dict | str

Examples:

```
>>> from pydriosm.reader import PBFRReadParse

>>> g1_dat = {'type': 'Point', 'coordinates': [-0.5134241, 52.6555853]}
>>> g1_data = PBFRReadParse.transform_unitary_geometry(g1_dat)
>>> type(g1_data)
shapely.geometry.point.Point
>>> g1_data.wkt
'POINT (-0.5134241 52.6555853)'

>>> g2_dat = {
...     'type': 'Feature',
...     'geometry': {
...         'type': 'Point',
...         'coordinates': [-0.5134241, 52.6555853]
...     },
...     'properties': {
...         'osm_id': '488432',
...         'name': None,
...         'barrier': None,
...         'highway': None,
...         'ref': None,
...         'address': None,
...         'is_in': None,
...         'place': None,
...         'man_made': None,
...         'other_tags': '"odbl"=>"clean"'
...     },
...     'id': 488432
... }
```

(continues on next page)

(continued from previous page)

```
>>> g2_data = PBFReadParse.transform_unitary_geometry(g2_dat, mode=2)
>>> type(g2_data)
dict
>>> list(g2_data.keys())
['type', 'geometry', 'properties', 'id']
>>> g2_data['geometry']
'POINT (-0.5134241 52.6555853)'
```

Transformer.update_other_tags

classmethod `Transformer.update_other_tags(prop_or_feat, mode=1)`

Update the original data of 'other_tags' with parsed data.

Parameters

- `prop_or_feat (dict)` – original data of a feature or a 'properties' field
- `mode (int)` – options include {1, 2} indicating what action to take; when mode=1 (default), prop_or_feat should be data of a feature; when mode=2, prop_or_feat should be data of a 'properties' field

Returns

updated data of a feature or a 'properties' field

Return type

dict

Examples:

```
>>> from pydriosm.reader import Transformer

>>> prop_dat = {
...     'properties': {
...         'osm_id': '488432',
...         'name': None,
...         'barrier': None,
...         'highway': None,
...         'ref': None,
...         'address': None,
...         'is_in': None,
...         'place': None,
...         'man_made': None,
...         'other_tags': '"odbl"=>"clean"'
...     },
... }
```



```
>>> prop_dat_ = Transformer.update_other_tags(prop_dat['properties'])
>>> prop_dat_
{'osm_id': '488432',
 'name': None,
 'barrier': None,
 'highway': None,
 'ref': None,
 'address': None,
 'is_in': None,
 'place': None,
```

(continues on next page)

(continued from previous page)

```
'man_made': None,
'other_tags': {'odbl': 'clean'}}
```

See also:

- Examples for the method `PBFRReadParse.read_pbf()`.

PBFRReadParse

```
class pydriosm.reader.PBFRReadParse
```

Read/parse PBF data.

Examples:

```
>>> from pydriosm.reader import PBFRReadParse

>>> PBFRReadParse.LAYER_GEOM
{'points': shapely.geometry.point.Point,
 'lines': shapely.geometry.linestring.LineString,
 'multilinestrings': shapely.geometry.multipolygon.MultiLineString,
 'multipolygons': shapely.geometry.multipolygon.MultiPolygon,
 'other_relations': shapely.geometry.collection.GeometryCollection}
```

Attributes**LAYER_GEOM**

dict: Layer names of an OSM PBF file and their corresponding geometric objects defined in `Shapely`.

PBFRReadParse.LAYER_GEOM

```
PBFRReadParse.LAYER_GEOM = {'lines': <class
'shapely.geometry.linestring.LineString'>, 'multilinestrings': <class
'shapely.geometry.multipolygon.MultiLineString'>, 'multipolygons': <class
'shapely.geometry.multipolygon.MultiPolygon'>, 'other_relations': <class
'shapely.geometry.collection.GeometryCollection'>, 'points': <class
'shapely.geometry.point.Point'>}
```

dict: Layer names of an OSM PBF file and their corresponding geometric objects defined in `Shapely`.

Methods

<code>get_pbf_layer_geom_types([shape_name])</code>	A dictionary cross-referencing the names of PBF layers and their corresponding geometric objects defined in Shapely, or names.
<code>get_pbf_layer_names(pbf_pathname[, verbose])</code>	Get names (and indices) of all available layers in a PBF data file.
<code>read_pbf(pbf_pathname[, readable, expand, ...])</code>	Parse a PBF data file (by GDAL).
<code>read_pbf_layer(layer[, readable, expand, ...])</code>	Parse a layer of a PBF data file.
<code>transform_pbf_layer_field(layer_data, layer_name)</code>	Parse data of a layer of PBF data.

PBFRReadParse.get_pbf_layer_geom_types

classmethod PBFRReadParse.get_pbf_layer_geom_types(*shape_name=False*)

A dictionary cross-referencing the names of PBF layers and their corresponding geometric objects defined in Shapely, or names.

Parameters

`shape_name` (bool) – whether to return the names of geometry shapes, defaults to False

Returns

a dictionary with keys and values being, respectively, PBF layers and their corresponding geometric objects defined in Shapely

Return type

dict

Examples:

```
>>> from pydriosm.reader import PBFRReadParse

>>> PBFRReadParse.get_pbf_layer_geom_types()
{'points': shapely.geometry.point.Point,
 'lines': shapely.geometry.linestring.LineString,
 'multilinestrings': shapely.geometry.multilinestring.MultiLineString,
 'multipolygons': shapely.geometry.multipolygon.MultiPolygon,
 'other_relations': shapely.geometry.collection.GeometryCollection}

>>> PBFRReadParse.get_pbf_layer_geom_types(shape_name=True)
{'points': 'Point',
 'lines': 'LineString',
 'multilinestrings': 'MultiLineString',
 'multipolygons': 'MultiPolygon',
 'other_relations': 'GeometryCollection'}
```

PBFRReadParse.get_pbf_layer_names

```
classmethod PBFRReadParse.get_pbf_layer_names(pbf_pathname, verbose=False)
```

Get names (and indices) of all available layers in a PBF data file.

Parameters

- **pbf_pathname** (*str* / *os.PathLike* [*str*]) – path to a PBF data file
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False

Returns

indices and names of each layer of the PBF data file

Return type

dict

Examples:

```
>>> from pydriosm.reader import PBFRReadParse
>>> from pydriosm.downloader import GeofabrikDownloader
>>> from pyhelpers.dirs import delete_dir
>>> import os

>>> # Download the PBF data file of London as an example
>>> subrgn_name = 'london'
>>> file_format = ".pbf"
>>> dwnld_dir = "tests\osm_data"

>>> gfd = GeofabrikDownloader()

>>> gfd.download_osm_data(subrgn_name, file_format, dwnld_dir, verbose=True)
To download .osm.pbf data of the following geographic (sub)region(s):
    Greater London
? [No]|Yes: yes
Downloading "greater-london-latest.osm.pbf"
    to "tests\osm_data\greater-london\" ... Done.

>>> london_pbf_pathname = gfd.data_paths[0]
>>> os.path.relpath(london_pbf_pathname)
'tests\osm_data\greater-london\greater-london-latest.osm.pbf'

>>> # Get indices and names of all layers in the downloaded PBF data file
>>> pbf_layer_idx_names = PBFRReadParse.get_pbf_layer_names(london_pbf_pathname)
>>> type(pbf_layer_idx_names)
dict
>>> pbf_layer_idx_names
{0: 'points',
 1: 'lines',
 2: 'multilinestrings',
 3: 'multipolygons',
 4: 'other_relations'}

>>> # Delete the download directory (and the downloaded PBF data file)
>>> delete_dir(gfd.download_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.
```

PBFRReadParse.read_pbf

```
classmethod PBFRReadParse.read_pbf(pbf.pathname, readable=True, expand=False,  

                                    parse_geometry=False, parse_properties=False,  

                                    parse_other_tags=False, number_of_chunks=None,  

                                    max_tmpfile_size=5000, **kwargs)
```

Parse a PBF data file (by [GDAL](#)).

Parameters

- **pbf.pathname** (*str*) – pathname of a PBF data file
- **readable** (*bool*) – whether to parse each feature in the raw data, defaults to False
- **expand** (*bool*) – whether to expand dict-like data into separate columns, defaults to False
- **parse_geometry** (*bool*) – whether to represent the 'geometry' field in a [shapely.geometry](#) format, defaults to False
- **parse_properties** (*bool*) – whether to represent the 'properties' field in a tabular format, defaults to False
- **parse_other_tags** (*bool*) – whether to represent a 'other_tags' (of 'properties') in a [dict](#) format, defaults to False
- **number_of_chunks** (*int / None*) – number of chunks, defaults to None
- **max_tmpfile_size** (*int / None*) – maximum size of the temporary file, defaults to None; when *max_tmpfile_size=None*, it defaults to 5000
- **kwargs** – [optional] parameters of the function [pyhelpers.settings.gdal_configurations\(\)](#)

Returns

parsed OSM PBF data

Return type

[dict](#)

Note: The [GDAL/OGR](#) drivers categorizes the features of OSM PBF data into five layers:

- **0:** 'points' - "node" features having significant tags attached
- **1:** 'lines' - "way" features being recognized as non-area
- **2:** 'multilinestrings' - "relation" features forming a multilinestring (type='multilinestring' / type='route')
- **3:** 'multipolygons' - "relation" features forming a multipolygon (type='multipolygon' / type='boundary'), and "way" features being recognized as area
- **4:** 'other_relations' - "relation" features not belonging to the above 2 layers

For more information, please refer to [OSM - OpenStreetMap XML and PBF](#).

Warning:

- **Parsing large PBF data files (e.g. > 50MB) can be time-consuming!**
- The function `read_osm_pbf()` may require fairly high amount of physical memory to parse large files, in which case it would be recommended that `number_of_chunks` is set to be a reasonable value.

Examples:

```
>>> from pydriosm.reader import PBFRReadParse
>>> from pydriosm.downloader import GeofabrikDownloader
>>> from pyhelpers.dirs import delete_dir
>>> import os

>>> # Download the PBF data file of 'Rutland' as an example
>>> subrgn_name = 'rutland'
>>> file_format = ".pbf"
>>> dwnld_dir = "tests\osm_data"

>>> gfd = GeofabrikDownloader()

>>> gfd.download_osm_data(subrgn_name, file_format, dwnld_dir, verbose=True)
To download .osm.pbf data of the following geographic (sub)region(s):
    Rutland
? [No]|Yes: yes
Downloading "rutland-latest.osm.pbf"
    to "tests\osm_data\rutland\" ... Done.

>>> rutland_pbf_path = gfd.data_paths[0]
>>> os.path.relpath(rutland_pbf_path)
'tests\osm_data\rutland\rutland-latest.osm.pbf'

>>> # Read the downloaded PBF data
>>> rutland_pbf = PBFRReadParse.read_pbf(rutland_pbf_path)
>>> type(rutland_pbf)
dict
>>> list(rutland_pbf.keys())
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']

>>> rutland_pbf_points = rutland_pbf['points']
>>> rutland_pbf_points.head()
0    {'type': 'Feature', 'geometry': {'type': 'Poin...
1    {'type': 'Feature', 'geometry': {'type': 'Poin...
2    {'type': 'Feature', 'geometry': {'type': 'Poin...
3    {'type': 'Feature', 'geometry': {'type': 'Poin...
4    {'type': 'Feature', 'geometry': {'type': 'Poin...
Name: points, dtype: object

>>> # Set `expand` to be `True`
>>> pbf_0 = PBFRReadParse.read_pbf(rutland_pbf_path, expand=True)
>>> type(pbf_0)
dict
>>> list(pbf_0.keys())
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']
>>> pbf_0_points = pbf_0['points']
>>> pbf_0_points.head()
      id ...                                         properties
```

(continues on next page)

(continued from previous page)

```

0    488432 ... {'osm_id': '488432', 'name': None, 'barrier': ...}
1    488658 ... {'osm_id': '488658', 'name': 'Tickencote Inter...', 'barrier': ...}
2    13883868 ... {'osm_id': '13883868', 'name': None, 'barrier': ...}
3    14049101 ... {'osm_id': '14049101', 'name': None, 'barrier': ...}
4    14558402 ... {'osm_id': '14558402', 'name': None, 'barrier': ...}
[5 rows x 3 columns]

>>> pbf_0_points['geometry'].head()
0    {'type': 'Point', 'coordinates': [-0.5134241, ...]
1    {'type': 'Point', 'coordinates': [-0.5313354, ...]
2    {'type': 'Point', 'coordinates': [-0.7229332, ...]
3    {'type': 'Point', 'coordinates': [-0.7249816, ...]
4    {'type': 'Point', 'coordinates': [-0.7266581, ...]
Name: geometry, dtype: object

>>> # Set both `expand` and `parse_geometry` to be `True`
>>> pbf_1 = PBFRReadParse.read_pbf(rutland_pbf_path, expand=True, parse_geometry=True)
>>> pbf_1_points = pbf_1['points']
>>> # Check the difference in 'geometry' column, compared to `pbf_0_points`
>>> pbf_1_points['geometry'].head()
0    POINT (-0.5134241 52.6555853)
1    POINT (-0.5313354 52.6737716)
2    POINT (-0.7229332 52.5889864)
3    POINT (-0.7249816 52.6748426)
4    POINT (-0.7266581 52.6695058)
Name: geometry, dtype: object

>>> # Set both `expand` and `parse_properties` to be `True`
>>> pbf_2 = PBFRReadParse.read_pbf(rutland_pbf_path, expand=True, parse_properties=True)
>>> pbf_2_points = pbf_2['points']
>>> pbf_2_points['other_tags'].head()
0          "odbl"=>"clean"
1                  None
2                  None
3      "traffic_calming"=>"cushion"
4          "direction"=>"clockwise"
Name: other_tags, dtype: object

>>> # Set both `expand` and `parse_other_tags` to be `True`
>>> pbf_3 = PBFRReadParse.read_pbf(rutland_pbf_path, expand=True, parse_properties=True,
...                                parse_other_tags=True)
>>> pbf_3_points = pbf_3['points']
>>> # Check the difference in 'other_tags', compared to ``pbf_2_points``
>>> pbf_3_points['other_tags'].head()
0          {'odbl': 'clean'}
1                  None
2                  None
3      {'traffic_calming': 'cushion'}
4          {'direction': 'clockwise'}
Name: other_tags, dtype: object

>>> # Delete the downloaded PBF data file
>>> delete_dir(gfd.download_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.

```

See also:

- Examples for the methods: `GeofabrikReader.read_osm_pbf()` and `BBBikeReader.read_osm_pbf()`.

PBFRReadParse.read_pbf_layer

```
classmethod PBFRReadParse.read_pbf_layer(layer, readable=True, expand=False,  

                                         parse_geometry=False, parse_properties=False,  

                                         parse_other_tags=False,  

                                         number_of_chunks=None)
```

Parse a layer of a PBF data file.

Parameters

- **layer** (`osgeo.ogr.Layer`) – a layer of a PBF data file, loaded by [GDAL/OGR](#)
- **readable** (`bool`) – whether to parse each feature in the raw data, defaults to False
- **expand** (`bool`) – whether to expand dict-like data into separate columns, defaults to False
- **parse_geometry** (`bool`) – whether to represent the 'geometry' field in a [shapely.geometry](#) format, defaults to False
- **parse_properties** (`bool`) – whether to represent the 'properties' field in a tabular format, defaults to False
- **parse_other_tags** (`bool`) – whether to represent a 'other_tags' (of 'properties') in a `dict` format, defaults to False
- **number_of_chunks** (`int / None`) – number of chunks, defaults to None

Returns

parsed data of the given OSM PBF layer

Return type

`dict`

See also:

- Examples for the method `PBFRReadParse.read_pbf()`.

PBFRReadParse.transform_pbf_layer_field

```
classmethod PBFRReadParse.transform_pbf_layer_field(layer_data, layer_name,  

                                                 parse_geometry=False,  

                                                 parse_properties=False,  

                                                 parse_other_tags=False)
```

Parse data of a layer of PBF data.

Parameters

- **layer_data** (`pandas.DataFrame / pandas.Series`) – dataframe of a specific layer of PBF data

- `layer_name (str)` – name (geometric type) of the PBF layer
- `parse_geometry (bool)` – whether to represent the 'geometry' field in a `shapely.geometry` format, defaults to False
- `parse_properties (bool)` – whether to represent the 'properties' field in a tabular format, defaults to False
- `parse_other_tags (bool)` – whether to represent a 'other_tags' (of 'properties') in a `dict` format, defaults to False

Returns

readable data of the given PBF layer

Return type

`pandas.DataFrame` | `pandas.Series`

See examples for the method `PBFRReadParse.read_pbf()`.

SHPReadParse

```
class pydriosm.reader.SHPReadParse
    Read/parse Shapefile data.
```

Examples:

```
>>> from pydriosm.reader import SHPReadParse

>>> SHPReadParse.EPSG4326_WGS84_PROJ4
'+proj=longlat +ellps=WGS84 +datum=WGS84 +no_defs'

>>> SHPReadParse.EPSG4326_WGS84_PROJ4_
{'proj': 'longlat', 'ellps': 'WGS84', 'datum': 'WGS84', 'no_defs': True}
```

Attributes

<code>ENCODING</code>	str: The encoding method applied to create an OSM shapefile.
<code>EPSG4326_WGS84_ESRI_WKT</code>	str: The metadata associated with the shapefiles coordinate and projection system.
<code>EPSG4326_WGS84_PROJ4</code>	str: Proj4 of EPSG Projection 4326 - WGS 84 (EPSG:4326) for the setting of <code>CRS</code> for shapefile data.
<code>EPSG4326_WGS84_PROJ4_</code>	dict: A dict-type representation of EPSG Projection 4326 - WGS 84 (EPSG:4326) for the setting of <code>CRS</code> for shapefile data.
<code>LAYER_NAMES</code>	set: Valid layer names for an OSM shapefile.
<code>SHAPE_TYPE_GEOM</code>	dict: Shape type codes of shapefiles and their corresponding <code>geometric objects</code> defined in <code>Shapely</code> .
<code>SHAPE_TYPE_GEOM_NAME</code>	dict: Shape type codes of shapefiles and their corresponding geometry object names
<code>SHAPE_TYPE_NAME_LOOKUP</code>	dict: Shape type codes of shapefiles and their corresponding names for an OSM shapefile.
<code>VECTOR_DRIVER</code>	Name of the vector driver for writing shapefile data; see also the parameter <code>driver</code> of <code>geopandas.GeoDataFrame.to_file()</code> .

`SHPReadParse.ENCODING`

```
SHPReadParse.ENCODING = 'UTF-8'
```

str: The encoding method applied to create an OSM shapefile. This is for writing .cpg (code page) file.

`SHPReadParse.EPSG4326_WGS84_ESRI_WKT`

```
SHPReadParse.EPSG4326_WGS84_ESRI_WKT =
'GEOGCS["GCS_WGS_1984",DATUM["D_WGS_1984",SPHEROID["WGS_1984",6378137.0,298.257223563]]'
```

str: The metadata associated with the shapefiles coordinate and projection system. ESRI WKT of EPSG Projection 4326 - WGS 84 ([EPSG:4326](#)) for shapefile data.

SHPReadParse.EPSG4326_WGS84_PROJ4

```
SHPReadParse.EPSG4326_WGS84_PROJ4 = '+proj=latlong +ellps=WGS84 +datum=WGS84  
+no_defs'
```

str: Proj4 of EPSG Projection 4326 - WGS 84 ([EPSG:4326](#)) for the setting of CRS for shapefile data.

SHPReadParse.EPSG4326_WGS84_PROJ4_

```
SHPReadParse.EPSG4326_WGS84_PROJ4_ = {'datum': 'WGS84', 'ellps': 'WGS84',  
'no_defs': True, 'proj': 'latlong'}
```

dict: A dict-type representation of EPSG Projection 4326 - WGS 84 ([EPSG:4326](#)) for the setting of CRS for shapefile data.

SHPReadParse.LAYER_NAMES

```
SHPReadParse.LAYER_NAMES = {'buildings', 'landuse', 'natural', 'places',  
'pofw', 'points', 'pois', 'railways', 'roads', 'traffic', 'transport',  
'water', 'waterways'}
```

set: Valid layer names for an OSM shapefile.

SHPReadParse.SHAPETYPE_GEOM

```
SHPReadParse.SHAPETYPE_GEOM = {1: <class 'shapely.geometry.point.Point'>,  
3: <class 'shapely.geometry.linestring.LineString'>, 5: <class  
'shapely.geometry.polygon.Polygon'>, 8: <class  
'shapely.geometry.multipoint.MultiPoint'>}
```

dict: Shape type codes of shapefiles and their corresponding geometric objects defined in Shapely.

SHPReadParse.SHAPETYPE_GEOM_NAME

```
SHPReadParse.SHAPETYPE_GEOM_NAME = {1: 'Point', 3: 'LineString', 5:  
'Polygon', 8: 'MultiPoint'}
```

dict: Shape type codes of shapefiles and their corresponding geometry object names

SHPReadParse.SHPE_TYPE_NAME_LOOKUP

```
SHPReadParse.SHPE_TYPE_NAME_LOOKUP = {0: None, 1: 'Point', 3: 'Polyline',
5: 'Polygon', 8: 'MultiPoint', 11: 'PointZ', 13: 'PolylineZ', 15:
'PolygonZ', 18: 'MultiPointZ', 21: 'PointM', 23: 'PolylineM', 25:
'PolygonM', 28: 'MultiPointM', 31: 'MultiPatch'}
```

dict: Shape type codes of shapefiles and their corresponding names for an OSM shapefile.

SHPReadParse.VECTOR_DRIVER

```
SHPReadParse.VECTOR_DRIVER = 'ESRI Shapefile'
```

Name of the vector driver for writing shapefile data; see also the parameter `driver` of `geopandas.GeoDataFrame.to_file()`.

Methods

<code>find_shp_layer_name(shp_filename)</code>	Find the layer name of OSM shapefile given its filename.
<code>merge_layer_shps(shp_zip_pathnames, layer_name)</code>	Merge shapefiles over a layer for multiple geographic regions.
<code>merge_shps(shp_pathnames, path_to_merged_dir)</code>	Merge multiple shapefiles.
<code>read_layer_shps(shp_pathnames[, ...])</code>	Read a layer of OSM shapefile data.
<code>read_shp(shp_pathname[, engine, emulate_gpd])</code>	Read a shapefile.
<code>unzip_shp_zip(shp_zip_pathname[, ...])</code>	Unzip a zipped shapefile.
<code>validate_shp_layer_names(layer_names)</code>	Validate the input of layer name(s) for reading shapefiles.
<code>write_to_shapefile(data, write_to[, ...])</code>	Save .shp data as a shapefile by <code>PyShp</code> .

SHPReadParse.find_shp_layer_name

```
classmethod SHPReadParse.find_shp_layer_name(shp_filename)
```

Find the layer name of OSM shapefile given its filename.

Parameters

`shp_filename (str)` – filename of a shapefile (.shp)

Returns

layer name of the shapefile

Return type

str

Examples:

```
>>> from pydriosm.reader import SHPReadParse

>>> SHPReadParse.find_shp_layer_name("") is None
True

>>> SHPReadParse.find_shp_layer_name("gis_osm_railways_free_1.shp")
'railways'

>>> SHPReadParse.find_shp_layer_name("gis_osm_transport_a_free_1.shp")
'transport'
```

`SHPReadParse.merge_layer_shps`

```
classmethod SHPReadParse.merge_layer_shps(shp_zip_pathnames, layer_name,
                                         engine='pyshp', rm_zip_extracts=True,
                                         output_dir=None, rm_shp_temp=True,
                                         ret_shp_pathname=False, verbose=False)
```

Merge shapefiles over a layer for multiple geographic regions.

Parameters

- `shp_zip_pathnames` (`list`) – list of paths to data of shapefiles (in .shp.zip format)
- `layer_name` (`str`) – name of a layer (e.g. ‘railways’)
- `engine` (`str`) – the open-source package used to merge/save shapefiles; options include: ‘pyshp’ (default) and ‘geopandas’ (or ‘gpd’) if `engine='geopandas'`, this function relies on `geopandas.GeoDataFrame.to_file()`; otherwise, it by default uses `shapefile.Writer()`
- `rm_zip_extracts` (`bool`) – whether to delete the extracted files, defaults to `False`
- `rm_shp_temp` (`bool`) – whether to delete temporary layer files, defaults to `False`
- `output_dir` (`str` / `None`) – if `None` (default), use the layer name as the name of the folder where the merged .shp files will be saved
- `ret_shp_pathname` (`bool`) – whether to return the pathname of the merged .shp file, defaults to `False`
- `verbose` (`bool` / `int`) – whether to print relevant information in console, defaults to `False`

Returns

the path to the merged file when `ret_merged_shp_path=True`

Return type

`list`

Note:

- This function does not create projection (.prj) for the merged map. See also [MMS-1].
- For valid layer_name, check the function valid_shapefile_layer_names().

Examples:

```
>>> # To merge 'railways' layers of Greater Manchester and West Yorkshire

>>> from pydriosm.reader import SHPReadParse
>>> from pydriosm.downloader import GeofabrikDownloader
>>> from pyhelpers.dirs import delete_dir
>>> import os

>>> # Download the .shp.zip file of Manchester and West Yorkshire
>>> subrgn_names = ['Greater Manchester', 'West Yorkshire']
>>> file_fmt = ".shp"
>>> data_dir = "tests\osm_data"

>>> gfd = GeofabrikDownloader()

>>> gfd.download_osm_data(subrgn_names, file_fmt, data_dir, verbose=True)
To download .shp.zip data of the following geographic (sub)region(s):
    Greater Manchester
    West Yorkshire
? [No]|Yes: yes
Downloading "greater-manchester-latest-free.shp.zip"
    to "tests\osm_data\greater-manchester\" ... Done.
Downloading "west-yorkshire-latest-free.shp.zip"
    to "tests\osm_data\west-yorkshire\" ... Done.

>>> os.path.relpath(gfd.download_dir)
'tests\osm_data'
>>> len(gfd.data_paths)
2

>>> # Merge the layers of 'railways' of the two subregions
>>> merged_shp_path = SHPReadParse.merge_layer_shps(
...     gfd.data_paths, layer_name='railways', verbose=True, ret_shp_pathname=True)
Merging the following shapefiles:
    "greater-manchester_gis_osm_railways_free_1.shp"
    "west-yorkshire_gis_osm_railways_free_1.shp"
        In progress ... Done.
        Find the merged shapefile at "tests\osm_data\gre_man-wes_yor-railways\".

>>> # Check the pathname of the merged shapefile
>>> type(merged_shp_path)
list
>>> len(merged_shp_path)
1
>>> os.path.relpath(merged_shp_path[0])
'tests\osm_data\gre_man-wes_yor-railways\linestring.shp'

>>> # Read the merged .shp file
>>> merged_shp_data = SHPReadParse.read_shp(merged_shp_path[0], emulate_gpd=True)
>>> merged_shp_data.head()
   osm_id  code  ... tunnel
0      928999  6101  ...       F  LINESTRING (-2.2844621 53.4802635, -2.2851997 ...
1      929904  6101  ...       F  LINESTRING (-2.2917977 53.4619559, -2.2924877 ...
2      929905  6102  ...       F  LINESTRING (-2.2794048 53.4605819, -2.2799722 ...
3     3663332  6102  ...       F  LINESTRING (-2.2382139 53.4817985, -2.2381708 ...
```

(continues on next page)

(continued from previous page)

```

4 3996086 6101 ...      F LINESTRING (-2.6003053 53.4604346, -2.6005261 ...
[5 rows x 8 columns]

>>> # Delete the test data directory
>>> delete_dir(gfd.download_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.

```

See also:

- Examples for the method `GeofabrikReader.merge_subregion_layer_shp()`.

SHPReadParse.merge_shps

```
classmethod SHPReadParse.merge_shps(shp_pathnames, path_to_merged_dir, engine='pyshp',
                                     **kwargs)
```

Merge multiple shapefiles.

Parameters

- `shp_pathnames` (`list`) – list of paths to shapefiles (in .shp format)
- `path_to_merged_dir` (`str`) – path to a directory where the merged files are to be saved
- `engine` (`str`) – the open-source package that is used to merge/save shapefiles; options include: 'pyshp' (default) and 'geopandas' (or 'gpd') when `engine='geopandas'`, this function relies on `geopandas.GeoDataFrame.to_file()`; otherwise, it by default uses `shapefile.Writer()`

Note:

- When `engine='geopandas'` (or `engine='gpd'`), the implementation of this function requires that `GeoPandas` is installed.

See also:

- Examples for the function `merge_layer_shps()`.
- Resource: <https://github.com/GeospatialPython/pyshp>

SHPReadParse.read_layer_shps

```
classmethod SHPReadParse.read_layer_shps(shp_pathnames, feature_names=None,
                                         save_feat_shp=False, ret_feat_shp_path=False,
                                         **kwargs)
```

Read a layer of OSM shapefile data.

Parameters

- **shp_pathnames** (*str* / *list*) – pathname of a .shp file, or pathnames of multiple shapefiles
- **feature_names** (*str* / *list* / *None*) – class name(s) of feature(s), defaults to None
- **save_feat_shp** (*bool*) – (when *fclass* is not *None*) whether to save data of the *fclass* as shapefile, defaults to False
- **ret_feat_shp_path** (*bool*) – (when *save_fclass_shp=True*) whether to return the path to the saved data of *fclass*, defaults to False
- **kwargs** – [optional] parameters of the method *SHPReadParse.read_shp()*

Returns

parsed shapefile data; and optionally, pathnames of the shapefiles of the specified features (when *ret_feat_shp_path=True*)

Return type

pandas.DataFrame | *geopandas.GeoDataFrame* | *tuple*

Examples:

```
>>> from pydriosm.reader import SHPReadParse
>>> from pydriosm.downloader import GeofabrikDownloader
>>> from pyhelpers.dirs import cd, delete_dir
>>> import os

>>> # Download the shapefile data of London as an example
>>> subrgn_name = 'london'
>>> file_format = ".shp"
>>> dwnld_dir = "tests\osm_data"

>>> gfd = GeofabrikDownloader()

>>> gfd.download_osm_data(subrgn_name, file_format, dwnld_dir, verbose=True)
To download .shp.zip data of the following geographic (sub)region(s):
    Greater London
? [No] | Yes: yes
Downloading "greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\" ... Done.

>>> london_shp_zip = gfd.data_paths[0]
>>> os.path.relpath(london_shp_zip)
'tests\osm_data\greater-london\greater-london-latest-free.shp.zip'

>>> # Extract the downloaded .shp.zip file
>>> london_shp_dir = SHPReadParse.unzip_shp_zip(
...     london_shp_zip, layer_names='railways', ret_extract_dir=True)
>>> os.listdir(london_shp_dir)
```

(continues on next page)

(continued from previous page)

```

['gis_osm_railways_free_1.cpg',
 'gis_osm_railways_free_1.dbf',
 'gis_osm_railways_free_1.prj',
 'gis_osm_railways_free_1.shp',
 'gis_osm_railways_free_1.shx']
>>> london_railways_shp_path = cd(london_shp_dir, "gis_osm_railways_free_1.shp")

>>> # Read the 'railways' layer
>>> london_railways_shp = SHPReadParse.read_layer_shps(london_railways_shp_path)
>>> london_railways_shp.head()
   osm_id code ... coordinates shape_type
0 30804 6101 ... [(0.0048644, 51.6279262), (0.0061979, 51.62926... 3
1 101298 6103 ... [(-0.2249906, 51.493682), (-0.2251678, 51.4945... 3
2 101486 6103 ... [(-0.2055497, 51.5195429), (-0.2051377, 51.519... 3
3 101511 6101 ... [(-0.2119027, 51.5241906), (-0.2108059, 51.523... 3
4 282898 6103 ... [(-0.1862586, 51.6159083), (-0.1868721, 51.613... 3
[5 rows x 9 columns]

>>> # Extract only the features labelled 'rail' and save the extracted data to file
>>> railways_rail_shp, railways_rail_shp_path = SHPReadParse.read_layer_shps(
...     london_railways_shp_path, feature_names='rail', save_feat_shp=True,
...     ret_feat_shp_path=True)
>>> railways_rail_shp['fclass'].unique()
array(['rail'], dtype=object)

>>> type(railways_rail_shp_path)
list
>>> len(railways_rail_shp_path)
1
>>> os.path.basename(railways_rail_shp_path[0])
'gis_osm_railways_free_1_rail.shp'

>>> # Delete the download/data directory
>>> delete_dir(dwnld_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No] | Yes: yes
Deleting "tests\osm_data\" ... Done.

```

SHPReadParse.read_shp

```
classmethod SHPReadParse.read_shp(shp.pathname, engine='pyshp', emulate_gpd=False, **kwargs)
```

Read a shapefile.

Parameters

- **shp.pathname (str)** – pathname of a shape format file (.shp)
- **engine (str)** – method used to read shapefiles; options include: 'pyshp' (default) and 'geopandas' (or 'gpd') this function by default relies on `shapefile.reader()`; when `engine='geopandas'` (or `engine='gpd'`), it relies on `geopandas.read_file()`;
- **emulate_gpd (bool)** – whether to emulate the data format produced by `geopandas.read_file()` when `engine='pyshp'`.

- `kwargs` – [optional] parameters of the function `geopandas.read_file()` or `shapefile.reader()`

Returns

data frame of the shapefile data

Return type

`pandas.DataFrame` | `geopandas.GeoDataFrame`

Note:

- If `engine` is set to be '`geopandas`' (or '`gpd`'), it requires that `GeoPandas` is installed.

Examples:

```
>>> from pydriosm.reader import SHPReadParse
>>> from pydriosm.downloader import GeofabrikDownloader
>>> from pyhelpers.dirs import cd, delete_dir
>>> import os
>>> import glob

>>> # Download the shapefile data of London as an example
>>> subrgn_name = 'london'
>>> file_format = ".shp"
>>> dwnld_dir = "tests\osm_data"

>>> gfd = GeofabrikDownloader()

>>> gfd.download_osm_data(subrgn_name, file_format, dwnld_dir, verbose=True)
To download .shp.zip data of the following geographic (sub)region(s):
    Greater London
? [No]|Yes: yes
Downloading "greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\" ... Done.

>>> london_shp_zip = gfd.data_paths[0]
>>> os.path.relpath(london_shp_zip)
'tests\osm_data\greater-london\greater-london-latest-free.shp.zip'

>>> # Extract all
>>> london_shp_dir = SHPReadParse.unzip_shp_zip(london_shp_zip, ret_extract_dir=True)

>>> # Get the pathname of the .shp data of 'railways'
>>> path_to_railways_shp = glob.glob(cd(london_shp_dir, "*railways*.shp"))[0]
>>> os.path.relpath(path_to_railways_shp) # Check the pathname of the .shp file
'tests\osm_data\greater-london\greater-london-latest-free-shp\gis_osm_railwa...

>>> # Read the data of 'railways'
>>> london_railways = SHPReadParse.read_shp(path_to_railways_shp)
>>> london_railways.head()
   osm_id  code ...
0      30804  6101 ...
1      101298  6103 ...
2      101486  6103 ...
3      101511  6101 ...
4      282898  6103 ...

[5 rows x 9 columns]
```

(continues on next page)

(continued from previous page)

```
>>> # Set `emulate_gpd=True` to return data of similar format to what GeoPandas does
>>> london_railways = SHPReadParse.read_shp(path_to_railways_shp, emulate_gpd=True)
>>> london_railways.head()
   osm_id code ... tunnel           geometry
0  30804  6101 ...      F  LINESTRING (0.0048644 51.6279262, 0.0061979 51...
1  101298  6103 ...      F  LINESTRING (-0.2249906 51.493682, -0.2251678 5...
2  101486  6103 ...      F  LINESTRING (-0.2055497 51.5195429, -0.2051377 ...
3  101511  6101 ...      F  LINESTRING (-0.2119027 51.5241906, -0.2108059 ...
4  282898  6103 ...      F  LINESTRING (-0.1862586 51.6159083, -0.1868721 ...
[5 rows x 8 columns]

>>> # Alternatively, set `engine` to be 'geopandas' (or 'gpd') to use GeoPandas
>>> london_railways_ = SHPReadParse.read_shp(path_to_railways_shp, engine='geopandas')
>>> london_railways_.head()
   osm_id code ... tunnel           geometry
0  30804  6101 ...      F  LINESTRING (0.00486 51.62793, 0.00620 51.62927)
1  101298  6103 ...      F  LINESTRING (-0.22499 51.49368, -0.22517 51.494...
2  101486  6103 ...      F  LINESTRING (-0.20555 51.51954, -0.20514 51.519...
3  101511  6101 ...      F  LINESTRING (-0.21190 51.52419, -0.21081 51.523...
4  282898  6103 ...      F  LINESTRING (-0.18626 51.61591, -0.18687 51.61384)
[5 rows x 8 columns]

>>> # Check the data types of `london_railways` and `london_railways_`
>>> railways_data = [london_railways, london_railways_]
>>> list(map(type, railways_data))
[pandas.core.frame.DataFrame, geopandas.geodataframe.GeoDataFrame]
>>> # Check the geometry data of `london_railways` and `london_railways_`
>>> geom1, geom2 = map(lambda x: x['geometry'].map(lambda y: y.wkt), railways_data)
>>> geom1.equals(geom2)
True

>>> # Delete the download/data directory
>>> delete_dir(gfd.download_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No] | Yes: yes
Deleting "tests\osm_data\" ... Done.
```

SHPReadParse.unzip_shp_zip

```
classmethod SHPReadParse.unzip_shp_zip(shp_zip_pathname, extract_to=None,
                                         layer_names=None, separate=False,
                                         ret_extract_dir=False, verbose=False)
```

Unzip a zipped shapefile.

Parameters

- **shp_zip_pathname** (`str` / `os.PathLike [str]`) – path to a zipped shapefile data (.shp.zip)
- **extract_to** (`str` / `None`) – path to a directory where extracted files will be saved; when `extract_to=None` (default), the same directory where the .shp.zip file is saved
- **layer_names** (`str` / `list` / `None`) – name of a .shp layer, e.g. ‘railways’, or names of multiple layers; when `layer_names=None` (default), all

available layers

- **separate** (bool) – whether to put the data files of different layer in respective folders, defaults to False
- **ret_extract_dir** (bool) – whether to return the pathname of the directory where extracted files are saved, defaults to False
- **verbose** (bool / int) – whether to print relevant information in console, defaults to False

Returns

the path to the directory of extracted files when ret_extract_dir=True

Return type

str

Examples:

```
>>> from pydriosm.reader import SHPReadParse
>>> from pydriosm.downloader import GeofabrikDownloader
>>> from pyhelpers.dirs import cd, delete_dir
>>> import os

>>> # Download the shapefile data of London as an example
>>> subrgn_name = 'london'
>>> file_format = ".shp"
>>> dwnld_dir = "tests\osm_data"

>>> gfd = GeofabrikDownloader()

>>> gfd.download_osm_data(subrgn_name, file_format, dwnld_dir, verbose=True)
To download .shp.zip data of the following geographic (sub)region(s):
    Greater London
? [No] |Yes: yes
Downloading "greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\" ... Done.

>>> path_to_shp_zip = gfd.data_paths[0]
>>> os.path.relpath(path_to_shp_zip)
'tests\osm_data\greater-london\greater-london-latest-free.shp.zip'

>>> # To extract data of a specific layer 'railways'
>>> london_railways_dir = SHPReadParse.unzip_shp_zip(
...     path_to_shp_zip, layer_names='railways', verbose=True, ret_extract_dir=True)
Extracting the following layer(s):
    'railways'
    from "tests\osm_data\greater-london\greater-london-latest-free.shp.zip"
        to "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.

>>> os.path.relpath(london_railways_dir) # Check the directory
'tests\osm_data\greater-london\greater-london-latest-free-shp'

>>> # When multiple layer names are specified, the extracted files for each of the
>>> # layers can be put into a separate subdirectory by setting `separate=True`:
>>> lyr_names = ['railways', 'transport', 'traffic']
>>> dirs_of_layers = SHPReadParse.unzip_shp_zip(
...     path_to_shp_zip, layer_names=lyr_names, separate=True, verbose=2,
...     ret_extract_dir=True)
Extracting the following layer(s):
```

(continues on next page)

(continued from previous page)

```

'railways'
'transport'
'traffic'
from "tests\osm_data\greater-london\greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.
Grouping files by layers ...
    railways ... Done.
    transport_a ... Done.
    transport ... Done.
    traffic_a ... Done.
    traffic ... Done.
Done.

>>> len(dirs_of_layers) == 3
True
>>> os.path.relpath(os.path.commonpath(dirs_of_layers))
'tests\osm_data\greater-london\greater-london-latest-free-shp'
>>> set(map(os.path.basename, dirs_of_layers))
{'railways', 'traffic', 'transport'}

>>> # Remove the subdirectories
>>> delete_dir(dirs_of_layers, confirmation_required=False)

>>> # To extract all (without specifying `layer_names`)
>>> london_shp_dir = SHPReadParse.unzip_shp_zip(
...     path_to_shp_zip, verbose=True, ret_extract_dir=True)
Extracting "tests\osm_data\greater-london\greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.

>>> # Check the directory
>>> os.path.relpath(london_shp_dir)
'tests\osm_data\greater-london\greater-london-latest-free-shp'
>>> len(os.listdir(london_shp_dir))
91
>>> # Get the names of all available layers
>>> set(filter(None, map(SHPReadParse.find_shp_layer_name, os.listdir(london_shp_dir))))
{'buildings',
 'landuse',
 'natural',
 'places',
 'pofw',
 'pois',
 'railways',
 'roads',
 'traffic',
 'transport',
 'water',
 'waterways'}

>>> # Delete the download/data directory
>>> delete_dir(gfd.download_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.

```

SHPReadParse.validate_shp_layer_names

classmethod `SHPReadParse.validate_shp_layer_names(layer_names)`

Validate the input of layer name(s) for reading shapefiles.

Parameters

- `layer_names (str / list / None)` – name of a shapefile layer, e.g. ‘railways’, or names of multiple layers; if `None` (default), returns an empty list; if `layer_names='all'`, the function returns a list of all available layers

Returns

valid layer names to be input

Return type

list

Examples:

```
>>> from pydriosm.reader import SHPReadParse

>>> SHPReadParse.validate_shp_layer_names(None)
[]

>>> SHPReadParse.validate_shp_layer_names('point')
['points']

>>> SHPReadParse.validate_shp_layer_names(['point', 'land'])
['points', 'landuse']

>>> SHPReadParse.validate_shp_layer_names('all')
['buildings',
 'landuse',
 'natural',
 'places',
 'pofw',
 'points',
 'pois',
 'railways',
 'roads',
 'traffic',
 'transport',
 'water',
 'waterways']
```

SHPReadParse.write_to_shapefile

classmethod `SHPReadParse.write_to_shapefile(data, write_to, shp_filename=None, decimal_precision=5, ret_shp_pathname=False, verbose=False)`

Save .shp data as a shapefile by PyShp.

Parameters

- `data (pandas.DataFrame)` – data of a shapefile
- `write_to (str)` – pathname of a directory where the shapefile data is to be saved

- **shp_filename** (*str* / *os.PathLike* [*str*] / *None*) – filename (or pathname) of the target .shp file, defaults to None; when *shp_filename=None*, it is by default the basename of *write_to*
- **decimal_precision** (*int*) – decimal precision for writing float records, defaults to 5
- **ret_shp_pathname** (*bool*) – whether to return the pathname of the output .shp file, defaults to False
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False

Examples:

```
>>> from pydriosm.reader import SHPReadParse
>>> from pydriosm.downloader import GeofabrikDownloader
>>> from pyhelpers.dirs import cd, delete_dir
>>> import os
>>> import glob

>>> # Download the shapefile data of London as an example
>>> subrgn_name = 'london'
>>> file_format = ".shp"
>>> dwnld_dir = "tests\osm_data"

>>> gfd = GeofabrikDownloader()

>>> gfd.download_osm_data(subrgn_name, file_format, dwnld_dir, verbose=True)
To download .shp.zip data of the following geographic (sub)region(s):
    Greater London
? [No]|Yes: yes
Downloading "greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\" ... Done.

>>> london_shp_zip = gfd.data_paths[0]
>>> os.path.relpath(london_shp_zip)
'tests\osm_data\greater-london\greater-london-latest-free.shp.zip'

>>> # Extract the 'railways' layer of the downloaded .shp.zip file
>>> lyr_name = 'railways'

>>> railways_shp_dir = SHPReadParse.unzip_shp_zip(
...     london_shp_zip, layer_names=lyr_name, verbose=True, ret_extract_dir=True)
Extracting the following layer(s):
    'railways'
        from "tests\osm_data\greater-london\greater-london-latest-free.shp.zip"
            to "tests\osm_data\greater-london\greater-london-latest-free-shp\"

Done.
>>> # Check out the output directory
>>> os.path.relpath(railways_shp_dir)
'tests\osm_data\greater-london\greater-london-latest-free-shp'

>>> # Get the pathname of the .shp data of 'railways'
>>> path_to_railways_shp = glob.glob(cd(railways_shp_dir, f"*\{lyr_name}\*.shp"))[0]
>>> os.path.relpath(path_to_railways_shp) # Check the pathname of the .shp file
'tests\osm_data\greater-london\greater-london-latest-free-shp\gis_osm_railwa...'

>>> # Read the .shp file
>>> london_railways_shp = SHPReadParse.read_shp(path_to_railways_shp)
```

(continues on next page)

(continued from previous page)

```

>>> # Create a new directory for saving the 'railways' data
>>> railways_subdir = cd(os.path.dirname(railways_shp_dir), lyr_name)
>>> os.path.relpath(railways_subdir)
'tests\osm_data\greater-london\railways'

>>> # Save the data of 'railways' to the new directory
>>> path_to_railways_shp_ = SHPReadParse.write_to_shapefile(
...     london_railways_shp, railways_subdir, ret_shp_pathname=True, verbose=True)
Writing data to "tests\osm_data\greater-london\railways\railways.*" ... Done.
>>> os.path.basename(path_to_railways_shp_)
'railways.shp'

>>> # If `shp_filename` is specified
>>> path_to_railways_shp_ = SHPReadParse.write_to_shapefile(
...     london_railways_shp, railways_subdir, shp_filename="rail_data",
...     ret_shp_pathname=True, verbose=True)
Writing data to "tests\osm_data\greater-london\railways\rail_data.*" ... Done.
>>> os.path.basename(path_to_railways_shp_)
'rail_data.shp'

>>> # Retrieve the saved the .shp file
>>> london_railways_shp_ = SHPReadParse.read_shp(path_to_railways_shp_)

>>> # Check if the retrieved .shp data is equal to the original one
>>> london_railways_shp_.equals(london_railways_shp)
True

>>> # Delete the download/data directory
>>> delete_dir(gfd.download_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.

```

VarReadParse

`class pydriosm.reader.VarReadParse`

Read/parse OSM data of various formats (other than PBF and Shapefile).

Attributes

`FILE_FORMATS`

set: Valid file formats.

VarReadParse.FILE_FORMATS

```
VarReadParse.FILE_FORMATS = {'.csv.xz', 'geojson.xz'}
```

set: Valid file formats.

Methods

<code>read_csv_xz(csv_xz_pathname[, col_names])</code>	Read/parse a compressed CSV (.csv.xz) data file.
<code>read_geojson_xz(geojson_xz_pathname[, ...])</code>	Read/parse a compressed Osmium GeoJSON (.geojson.xz) data file.

VarReadParse.read_csv_xz

```
classmethod VarReadParse.read_csv_xz(csv_xz_pathname, col_names=None)
```

Read/parse a compressed CSV (.csv.xz) data file.

Parameters

- `csv_xz_pathname (str)` – path to a .csv.xz data file
- `col_names (list / None)` – column names of .csv.xz data, defaults to None

Returns

tabular data of the CSV file

Return type

pandas.DataFrame

See examples for the method `BBBikeReader.read_csv_xz()`.

VarReadParse.read_geojson_xz

```
classmethod VarReadParse.read_geojson_xz(geojson_xz_pathname, engine=None, parse_geometry=False)
```

Read/parse a compressed Osmium GeoJSON (.geojson.xz) data file.

Parameters

- `geojson_xz_pathname (str)` – path to a .geojson.xz data file
- `engine (str / None)` – an open-source Python package for JSON serialization, defaults to None; when engine=None, it refers to the built-in `json` module; otherwise options include: 'ujson' (for UltraJSON), 'orjson' (for orjson) and 'rapidjson' (for python-rapidjson)
- `parse_geometry (bool)` – whether to reformat coordinates into a geometric object, defaults to False

Returns

tabular data of the Osmium GeoJSON file

Return type
pandas.DataFrame

See also:

- Examples for the method `BBBikeReader.read_geojson_xz()`.

3.2.2 Base reader class

<code>_Reader([downloader, data_dir, max_tmpfile_size])</code>	Initialization of a data reader.
--	----------------------------------

_Reader

`class pydriosm.reader._Reader(downloader=None, data_dir=None, max_tmpfile_size=None)`
Initialization of a data reader.

Parameters

- `downloader` (`GeofabrikDownloader / BBBikeDownloader / None`) – class of a downloader, valid options include `GeofabrikDownloader` and `BBBikeDownloader`
- `data_dir` (`str / None`) – directory where the data file is located/saved, defaults to None; when `data_dir=None`, it refers to the directory specified by the corresponding downloader
- `max_tmpfile_size` (`int / None`) – defaults to None, see also the function `pyhelpers.settings.gdal_configurations()`

Variables

`downloader` (`GeofabrikDownloader / BBBikeDownloader / None`) – instance of the class `GeofabrikDownloader` or `BBBikeDownloader`

Tests:

```
>>> from pydriosm.reader import _Reader

>>> r = _Reader()

>>> r.NAME
'DSM Reader'

>>> r.SHP
pydriosm.reader.SHPReadParse
```

Attributes

<code>DEFAULT_DATA_DIR</code>	str: Default data directory.
<code>LONG_NAME</code>	str: Full name of the data resource.
<code>NAME</code>	str: Name of the free download server.
<code>data_dir</code>	Name or pathname of a data directory.
<code>data_paths</code>	Pathnames of all data files.

`_Reader.DEFAULT_DATA_DIR`

```
_Reader.DEFAULT_DATA_DIR = 'osm_data'  
str: Default data directory.
```

`_Reader.LONG_NAME`

```
_Reader.LONG_NAME = 'OpenStreetMap data reader and parser'  
str: Full name of the data resource.
```

`_Reader.NAME`

```
_Reader.NAME = 'OSM Reader'  
str: Name of the free download server.
```

`_Reader.data_dir`

property `_Reader.data_dir`
Name or pathname of a data directory.

Returns

name or pathname of a directory for saving downloaded data files

Return type

str | None

Tests:

```
>>> from pydriosm.reader import _Reader  
>>> from pydriosm.downloader import GeofabrikDownloader, BBBikeDownloader  
>>> import os  
  
>>> r = _Reader()  
>>> os.path.relpath(r.data_dir)  
'osm_data'  
  
>>> r = _Reader(downloader=GeofabrikDownloader)  
>>> os.path.relpath(r.data_dir)  
'osm_data\geofabrik'
```

(continues on next page)

(continued from previous page)

```
>>> r = _Reader(downloader=BBBikeDownloader)
>>> os.path.relpath(r.data_dir)
'osm_data\bbbike'
```

_Reader.data_paths

property _Reader.data_paths

Pathnames of all data files.

Returns

pathnames of all data files

Return type

list

Tests:

```
>>> from pydriosm.reader import _Reader
>>> r = _Reader()
>>> r.data_paths
[]
```

Methods

<code>cdd(*sub_dir[, mkdir])</code>	Change directory to default data directory and its subdirectories or a specific file.
<code>get_file_path(subregion_name, osm_file_format)</code>	Get the path to an OSM data file (if available) of a specific file format for a geographic (sub)region.
<code>get_shp.pathname(subregion_name[, ...])</code>	Get path(s) to shapefile(s) for a geographic (sub)region (by searching a local data directory).
<code>make_shp_pk1.pathname(shp_zip_filename, ...)</code>	Make a pathname of a pickle file for saving shapefile data.
<code>read_osm_pbf(subregion_name[, data_dir, ...])</code>	Read a PBF (.osm.pbf) data file of a geographic (sub)region.
<code>read_osm_var(meth, subregion_name, ...[, ...])</code>	Read data file of various formats (other than PBF and shapefile) for a geographic (sub)region.
<code>read_shp_zip(subregion_name[, layer_names, ...])</code>	Read a .shp.zip data file of a geographic (sub)region.
<code>remove_extracts(path_to_extract_dir, verbose)</code>	Remove data extracts.
<code>validate_file_path(path_to_osm_file[, ...])</code>	Validate the pathname of an OSM data file.
<code>validate_input_dtype(var_input)</code>	Validate the data type of the input variable.
<code>validate_shp_layer_names(layer_names_, ...)</code>	Validate the input of layer name(s) for reading shapefiles.

_Reader.cdd

```
classmethod _Reader.cdd(*sub_dir, mkdir=False, **kwargs)
```

Change directory to default data directory and its subdirectories or a specific file.

Parameters

- **sub_dir** (*str* / *os.PathLike* [*str*]) – name of directory; names of directories (and/or a filename)
- **mkdir** (*bool*) – whether to create a directory, defaults to False
- **kwargs** – [optional] parameters of the function `pyhelpers.dir.cd()`

Returns

an absolute pathname to a directory (or a file)

Return type

str | *os.PathLike*[*str*]

Tests:

```
>>> from pydriosm.reader import _Reader
>>> import os

>>> os.path.relpath(_Reader.cdd())
'osm_data'

>>> os.path.exists(_Reader.cdd())
False
```

_Reader.get_file_path

```
_Reader.get_file_path(subregion_name, osm_file_format, data_dir=None)
```

Get the path to an OSM data file (if available) of a specific file format for a geographic (sub)region.

Parameters

- **subregion_name** (*str*) – name of a geographic (sub)region (case-insensitive) that is available on a free download server
- **osm_file_format** (*str*) – format (file extension) of OSM data
- **data_dir** (*str* / *None*) – directory where the data file is located/saved, defaults to None; when `data_dir=None`, it refers to the directory specified by the corresponding downloader

Returns

path to the data file

Return type

str | *None*

Tests:

```

>>> from pydriosm.reader import _Reader
>>> from pydriosm.downloader import GeofabrikDownloader, BBBikeDownloader
>>> import os

>>> r = _Reader(downloader=GeofabrikDownloader)

>>> subrgn_name = 'rutland'
>>> file_format = ".pbf"
>>> dat_dir = "tests\osm_data"

>>> path_to_rutland_pbf = r.get_file_path(subrgn_name, file_format, dat_dir)
>>> os.path.relpath(path_to_rutland_pbf)
'tests\osm_data\rutland\rutland-latest.osm.pbf'
>>> os.path.isfile(path_to_rutland_pbf)
False

>>> subrgn_name = 'leeds'
>>> path_to_leeds_pbf = r.get_file_path(subrgn_name, file_format, dat_dir)
>>> path_to_leeds_pbf is None
True

>>> # Change the `downloader` to `BBBikeDownloader`
>>> r = _Reader(downloader=BBBikeDownloader)
>>> path_to_leeds_pbf = r.get_file_path(subrgn_name, file_format, dat_dir)
>>> os.path.relpath(path_to_leeds_pbf)
'tests\osm_data\leeds\Leeds.osm.pbf'

```

`_Reader.get_shp.pathname`

`_Reader.get_shp.pathname(subregion_name, layer_name=None, feature_name=None, data_dir=None)`

Get path(s) to shapefile(s) for a geographic (sub)region (by searching a local data directory).

Parameters

- `subregion_name` (`str`) – name of a geographic (sub)region (case-insensitive) that is available on Geofabrik free download server
- `layer_name` (`str` / `None`) – name of a .shp layer (e.g. 'railways'), defaults to `None`
- `feature_name` (`str` / `None`) – name of a feature (e.g. 'rail'); if `None` (default), all available features included
- `data_dir` (`str` / `None`) – directory where the search is conducted; if `None` (default), the default directory

Returns

path(s) to shapefile(s)

Return type

list

Examples:

```

>>> from pydriosm.reader import GeofabrikReader
>>> from pyhelpers.dirs import delete_dir
>>> import os

>>> gfr = GeofabrikReader()

>>> subrgn_name = 'london'
>>> file_format = ".shp"
>>> dat_dir = "tests\osm_data"

>>> # Try to get the shapefiles' pathnames
>>> london_shp_path = gfr.get_shp_pathname(subregion_name=subrgn_name, data_dir=dat_dir)
>>> london_shp_path # An empty list if no data is available
[]

>>> # Download the shapefiles of London
>>> path_to_london_shp_zip = gfr.downloader.download_osm_data(
...     subrgn_name, file_format, dat_dir, verbose=True, ret_download_path=True)
To download .shp.zip data of the following geographic (sub)region(s):
    Greater London
? [No]|Yes: yes
Downloading "greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\" ... Done.

>>> # Extract the downloaded .zip file
>>> gfr.SHP.unzip_shp_zip(path_to_london_shp_zip[0], verbose=True)
Extracting "tests\osm_data\greater-london\greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.

>>> # Try again to get the shapefiles' pathnames
>>> london_shp_path = gfr.get_shp_pathname(subrgn_name, data_dir=dat_dir)
>>> len(london_shp_path) > 1
True

>>> # Get the file path of 'railways' shapefile
>>> lyr_name = 'railways'
>>> railways_shp_path = gfr.get_shp_pathname(subrgn_name, lyr_name, data_dir=dat_dir)
>>> len(railways_shp_path)
1
>>> railways_shp_path = railways_shp_path[0]
>>> os.path.relpath(railways_shp_path)
'tests\osm_data\greater-london\greater-london-latest-free-shp\gis_osm_railways_fr...

>>> # Get/save shapefile data of features labelled 'rail' only
>>> feat_name = 'rail'
>>> railways_shp = gfr.SHP.read_layer_shps(
...     railways_shp_path, feature_names=feat_name, save_feat_shp=True)
>>> railways_shp.head()
   osm_id  code  ...  coordinates  shape_type
0    30804  6101  ...  [(0.0048644, 51.6279262), (0.0061979, 51.62926...  3
3    101511  6101  ...  [(-0.2119027, 51.5241906), (-0.2108059, 51.523...  3
5    361978  6101  ...  [(-0.0298545, 51.6619398), (-0.0302322, 51.659...  3
6    2370155  6101  ...  [(-0.3379005, 51.5937776), (-0.3367807, 51.593...  3
7    2526598  6101  ...  [(-0.1886021, 51.3602632), (-0.1884216, 51.360...  3
[5 rows x 9 columns]

>>> # Get the file path to the data of 'rail'
>>> rail_shp_path = gfr.get_shp_pathname(subrgn_name, lyr_name, feat_name, dat_dir)
>>> len(rail_shp_path)
1

```

(continues on next page)

(continued from previous page)

```

>>> rail_shp_path = rail_shp_path[0]
>>> os.path.relpath(rail_shp_path)
'tests\osm_data\greater-london\greater-london-latest-free-shp\railways\rail.shp'

>>> # Retrieve the data of 'rail' feature
>>> railways_rail_shp = gfr.SHP.read_layer_shps(rail_shp_path)
>>> railways_rail_shp.head()
   osm_id  code    ...           coordinates  shape_type
0    30804  6101  ... [(0.0048644, 51.6279262), (0.0061979, 51.62926...      3
1    101511  6101  ... [(-0.2119027, 51.5241906), (-0.2108059, 51.523...      3
2    361978  6101  ... [(-0.0298545, 51.6619398), (-0.0302322, 51.659...      3
3    2370155  6101  ... [(-0.3379005, 51.5937776), (-0.3367807, 51.593...      3
4    2526598  6101  ... [(-0.1886021, 51.3602632), (-0.1884216, 51.360...      3
[5 rows x 9 columns]

>>> # Delete the example data and the test data directory
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.

```

`_Reader.make_shp_pk1.pathname`

```
classmethod _Reader.make_shp_pk1.pathname(shp_zip_filename, extract_dir, layer_names_,  
                                         feature_names_)
```

Make a pathname of a pickle file for saving shapefile data.

Parameters

- `shp_zip_filename (str)` – filename of a .shp.zip file
- `extract_dir (str)` – pathname of a directory to which the .shp.zip file is extracted
- `layer_names (list)` – names of shapefile layers
- `feature_names (list)` – names of shapefile features

Returns

pathname of a pickle file for saving data of the specified shapefile

Return type

str

See examples for the methods `GeofabrikReader.read_shp_zip()` and `BBBikeReader.read_shp_zip()`.

`_Reader.read_osm_pbf`

```
_Reader.read_osm_pbf(subregion_name, data_dir=None, readable=False, expand=False,
                      parse_geometry=False, parse_properties=False, parse_other_tags=False,
                      update=False, download=True, pickle_it=False, ret_pickle_path=False,
                      rm_pbf_file=False, chunk_size_limit=50, verbose=False, **kwargs)
```

Read a PBF (.osm.pbf) data file of a geographic (sub)region.

Parameters

- **subregion_name** (*str*) – name of a geographic (sub)region (case-insensitive) that is available on Geofabrik free download server
- **data_dir** (*str* / *None*) – directory where the .osm.pbf data file is located/saved; if *None*, the default local directory
- **readable** (*bool*) – whether to parse each feature in the raw data, defaults to *False*
- **expand** (*bool*) – whether to expand dict-like data into separate columns, defaults to *False*
- **parse_geometry** (*bool*) – whether to represent the 'geometry' field in a `shapely.geometry` format, defaults to *False*
- **parse_properties** (*bool*) – whether to represent the 'properties' field in a tabular format, defaults to *False*
- **parse_other_tags** (*bool*) – whether to represent a 'other_tags' (of 'properties') in a `dict` format, defaults to *False*
- **download** (*bool*) – whether to download/update the PBF data file of the given subregion, if it is not available at the specified path, defaults to *True*
- **update** (*bool*) – whether to check to update pickle backup (if available), defaults to *False*
- **pickle_it** (*bool*) – whether to save the .pbf data as a pickle file, defaults to *False*
- **ret_pickle_path** (*bool*) – (when *pickle_it=True*) whether to return a path to the saved pickle file
- **rm_pbf_file** (*bool*) – whether to delete the downloaded .osm.pbf file, defaults to *False*
- **chunk_size_limit** (*int* / *None*) – threshold (in MB) that triggers the use of chunk parser, defaults to 50; if the size of the .osm.pbf file (in MB) is greater than *chunk_size_limit*, it will be parsed in a chunk-wise way
- **verbose** (*bool* / *int*) – whether to print relevant information in console as the function runs, defaults to *False*
- **kwargs** – [optional] parameters of the method `PBFRReadParse.read_pbf()`

Returns

dictionary of the .osm.pbf data; when *pickle_it=True*, return a tuple of the dictionary and a path to the pickle file

Return type

dict | tuple | None

See also:

- Examples for the methods `GeofabrikReader.read_osm_pbf()` and `BBBikeReader.read_osm_pbf()`.

_Reader.read_osm_var

`_Reader.read_osm_var(meth, subregion_name, osm_file_format, data_dir=None, download=False, verbose=False, **kwargs)`

Read data file of various formats (other than PBF and shapefile) for a geographic (sub)region.

Parameters

- `meth (Callable)` – name of a class method for getting (auxiliary) prepacked data
- `subregion_name (str)` – name of a geographic (sub)region (case-insensitive) that is available on a free download server
- `osm_file_format (str)` – format (file extension) of OSM data
- `data_dir (str / None)` – directory where the data file is located/saved, defaults to None; when `data_dir=None`, it refers to the directory specified by the corresponding downloader
- `download (bool)` – whether to download/update the PBF data file of the given subregion, if it is not available at the specified path, defaults to True
- `verbose (bool / int)` – whether to print relevant information in console as the function runs, defaults to False
- `kwargs` – [optional] parameters of the method specified by `meth`

Returns

data of the specified file format

Return type

pandas.DataFrame | None

See examples for the methods `BBBikeReader.read_csv_xz()` and `BBBikeReader.read_geojson_xz()`.

`_Reader.read_shp_zip`

```
_Reader.read_shp_zip(subregion_name, layer_names=None, feature_names=None, data_dir=None,
                      update=False, download=True, pickle_it=False, ret_pickle_path=False,
                      rm_extract=False, rm_shp_zip=False, verbose=False, **kwargs)
```

Read a .shp.zip data file of a geographic (sub)region.

Parameters

- **subregion_name** (*str*) – name of a geographic (sub)region (case-insensitive) that is available on Geofabrik free download server
- **layer_names** (*str* / *list* / *None*) – name of a .shp layer, e.g. ‘railways’, or names of multiple layers; if *None* (default), all available layers
- **feature_names** (*str* / *list* / *None*) – name of a feature, e.g. ‘rail’, or names of multiple features; if *None* (default), all available features
- **data_dir** (*str* / *None*) – directory where the .shp.zip data file is located/saved; if *None*, the default directory
- **update** (*bool*) – whether to check to update pickle backup (if available), defaults to *False*
- **download** (*bool*) – whether to ask for confirmation before starting to download a file, defaults to *True*
- **pickle_it** (*bool*) – whether to save the .shp data as a pickle file, defaults to *False*
- **ret_pickle_path** (*bool*) – (when *pickle_it=True*) whether to return a path to the saved pickle file
- **rm_extract** (*bool*) – whether to delete extracted files from the .shp.zip file, defaults to *False*
- **rm_shp_zip** (*bool*) – whether to delete the downloaded .shp.zip file, defaults to *False*
- **verbose** (*bool* / *int*) – whether to print relevant information in console as the function runs, defaults to *False*
- **kwargs** – [optional] parameters of the method *SHPRReadParse.read_shp()*

Returns

dictionary of the shapefile data, with keys and values being layer names and tabular data (in the format of *geopandas.GeoDataFrame*), respectively

Return type

dict | *collections.OrderedDict* | *None*

See examples for the methods *GeofabrikReader.read_shp_zip()* and *BBBikeReader.read_shp_zip()*.

_Reader.remove_extracts

```
classmethod _Reader.remove_extracts(path_to_extract_dir, verbose)
```

Remove data extracts.

Parameters

- **path_to_extract_dir** (*str* / *os.PathLike* [*str*]) – pathname of the directory where data extracts are stored
- **verbose** (*bool* / *int*) – whether to print relevant information in console as the function runs, defaults to False

See examples for the methods *GeofabrikReader.read_shp_zip()* and *BBBikeReader.read_shp_zip()*.

_Reader.validate_file_path

```
classmethod _Reader.validate_file_path(path_to_osm_file, osm_filename=None,  
data_dir=None)
```

Validate the pathname of an OSM data file.

Parameters

- **path_to_osm_file** (*str* / *os.PathLike* [*str*]) – pathname of an OSM data file
- **osm_filename** (*str*) – filename of the OSM data file
- **data_dir** (*str* / *os.PathLike* [*str*]) – name or pathname of the data directory

Returns

validated pathname of the specified OSM data file

Return type

str

Tests:

```
>>> from pydriosm.reader import _Reader  
>>> import os  
  
>>> file_path = _Reader.validate_file_path("a\b\c.osm.pbf")  
>>> file_path  
'a\b\c.osm.pbf'  
>>> file_path = _Reader.validate_file_path("a\b\c.osm.pbf", "x.y.z", data_dir="a\b")  
>>> os.path.relpath(file_path)  
'a\b\x.y.z'
```

_Reader.validate_input_dtype

```
classmethod _Reader.validate_input_dtype(var_input)
```

Validate the data type of the input variable.

Parameters

var_input (*str* / *list* / *None*) – a variable

Returns

validated input

Return type

list

Tests:

```
>>> from pydriosm.reader import _Reader

>>> _Reader.validate_input_dtype(var_input=None)
[]

>>> _Reader.validate_input_dtype(var_input='str')
['str']

>>> _Reader.validate_input_dtype(var_input=['str'])
['str']
```

_Reader.validate_shp_layer_names

```
_Reader.validate_shp_layer_names(layer_names_, extract_dir, shp_zip_pathname,
                                 subregion_name, osm_file_format, data_dir, update,
                                 download, verbose)
```

Validate the input of layer name(s) for reading shapefiles.

Parameters

- **layer_names** (*list*) – names of shapefile layers
- **extract_dir** (*str*) – pathname of a directory to which the .shp.zip file is extracted
- **shp_zip_pathname** (*str*) – pathname of a .shp.zip file
- **subregion_name** (*str*) – name of a geographic (sub)region (case-insensitive) that is available on Geofabrik free download server
- **osm_file_format** (*str*) – format (file extension) of OSM data
- **data_dir** (*str* / *os.PathLike* [*str*]) – name or pathname of the data directory
- **update** (*bool*) – whether to check to update pickle backup (if available), defaults to False
- **download** (*bool*) – whether to download/update the PBF data file of the given subregion, if it is not available at the specified path, defaults to True

- **verbose** (bool / int) – whether to print relevant information in console as the function runs, defaults to False

Returns

validated shapefile layer names

Return type

list

See examples for the methods `GeofabrikReader.read_shp_zip()` and `BBBikeReader.read_shp_zip()`.

3.2.3 Reading data

<code>_Reader([downloader, data_dir, max_tmpfile_size])</code>	Initialization of a data reader.
<code>GeofabrikReader([data_dir, max_tmpfile_size])</code>	Read Geofabrik OpenStreetMap data extracts.
<code>BBBikeReader([data_dir, max_tmpfile_size])</code>	Read BBBike exports of OpenStreetMap data.

GeofabrikReader

```
class pydriosm.reader.GeofabrikReader(data_dir=None, max_tmpfile_size=None)
```

Read Geofabrik OpenStreetMap data extracts.

Parameters

- **max_tmpfile_size** (int / None) – defaults to None, see also the function `pyhelpers.settings.gdal_configurations()`
- **data_dir** (str / None) – (a path or a name of) a directory where a data file is, defaults to None; when data_dir=None, it refers to a folder named osm_geofabrik under the current working directory

Variables

- **downloader** (GeofabrikDownloader) – instance of the class `GeofabrikDownloader`
- **name** (str) – name of the data resource
- **url** (str) – url of the homepage to the Geofabrik free download server

Examples:

```
>>> from pydriosm.reader import GeofabrikReader

>>> gfr = GeofabrikReader()

>>> gfr.NAME
'Geofabrik'
```

Attributes

<code>DEFAULT_DATA_DIR</code>	str: Default download directory.
<code>FILE_FORMATS</code>	set: Valid file formats.

GeofabrikReader.DEFAULT_DATA_DIR

`GeofabrikReader.DEFAULT_DATA_DIR = 'osm_data\\geofabrik'`
 str: Default download directory.

GeofabrikReader.FILE_FORMATS

`GeofabrikReader.FILE_FORMATS = {'.osm.bz2', '.osm.pbf', '.shp.zip'}`
 set: Valid file formats.

Methods

<code>get_file_path(subregion_name, osm_file_format)</code>	Get the local path to an OSM data file of a geographic (sub)region.
<code>get_pbf_layer_names(subregion_name[, data_dir])</code>	Get indices and names of all layers in the PBF data file of a given (sub)region.
<code>get_shp.pathname(subregion_name[, ...])</code>	Get path(s) to .shp file(s) for a geographic (sub)region (by searching a local data directory).
<code>merge_subregion_layer_shp(subregion_name, ...)</code>	Merge shapefiles for a specific layer of two or multiple geographic regions.
<code>read_osm_pbf(subregion_name[, data_dir, ...])</code>	Read a PBF (.osm.pbf) data file of a geographic (sub)region.
<code>read_shp_zip(subregion_name[, layer_names, ...])</code>	Read a .shp.zip data file of a geographic (sub)region.

GeofabrikReader.get_file_path

`GeofabrikReader.get_file_path(subregion_name, osm_file_format, data_dir=None)`

Get the local path to an OSM data file of a geographic (sub)region.

Parameters

- `subregion_name` (`str`) – name of a geographic (sub)region (case-insensitive) that is available on Geofabrik free download server
- `osm_file_format` (`str`) – file format of the OSM data available on the free download server
- `data_dir` (`str / None`) – directory where the data file of the subregion_name is located/saved; if `None` (default), the default local directory

Returns

path to PBF (.osm.pbf) file

Return type

str | None

Examples:

```
>>> from pydriosm.reader import GeofabrikReader
>>> from pyhelpers.dirs import delete_dir
>>> import os

>>> gfr = GeofabrikReader()

>>> subrgn_name = 'rutland'
>>> file_format = ".pbf"
>>> dat_dir = "tests\osm_data"

>>> path_to_rutland_pbf = gfr.get_file_path(subrgn_name, file_format, data_dir=dat_dir)

>>> # When "rutland-latest.osm.pbf" is unavailable at the package data directory
>>> os.path.isfile(path_to_rutland_pbf)
False

>>> # Download the PBF data file of Rutland to "tests\osm_data\""
>>> gfr.downloader.download_osm_data(subrgn_name, file_format, dat_dir, verbose=True)
To download .osm.pbf data of the following geographic (sub)region(s):
    Rutland
? [No] | Yes: yes
Downloading "rutland-latest.osm.pbf"
to "tests\osm_data\rutland\" ... Done.

>>> # Check again
>>> path_to_rutland_pbf = gfr.get_file_path(subrgn_name, file_format, data_dir=dat_dir)
>>> os.path.relpath(path_to_rutland_pbf)
'tests\osm_data\rutland\rutland-latest.osm.pbf'
>>> os.path.isfile(path_to_rutland_pbf)
True

>>> # Delete the test data directory
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No] | Yes: yes
Deleting "tests\osm_data\" ... Done.
```

GeofabrikReader.get_pbf_layer_names

`GeofabrikReader.get_pbf_layer_names(subregion_name, data_dir=None)`

Get indices and names of all layers in the PBF data file of a given (sub)region.

Parameters

- `subregion_name` (`str`) – name of a geographic (sub)region (case-insensitive) that is available on Geofabrik free download server
- `data_dir` –

Returns

indices and names of each layer of the PBF data file

Return type
dict

Examples:

```
>>> from pydriosm.reader import GeofabrikReader
>>> from pyhelpers.dirs import delete_dir
>>> import os

>>> gfr = GeofabrikReader()

>>> # Download the .shp.zip file of Rutland as an example
>>> subrgn_name = 'london'
>>> file_format = ".pbf"
>>> dat_dir = "tests\osm_data"

>>> gfr.downloader.download_osm_data(subrgn_name, file_format, dat_dir, verbose=True)
To download .osm.pbf data of the following geographic (sub)region(s):
    Greater London
? [No] |Yes: yes
Downloading "greater-london-latest.osm.pbf"
    to "tests\osm_data\greater-london\" ... Done.

>>> london_pbf_path = gfr.data_paths[0]
>>> os.path.relpath(london_pbf_path)
'tests\osm_data\greater-london\greater-london-latest.osm.pbf'

>>> lyr_idx_names = gfr.get_pbf_layer_names(london_pbf_path)
>>> lyr_idx_names
{0: 'points',
 1: 'lines',
 2: 'multilinestrings',
 3: 'multipolygons',
 4: 'other_relations'}

>>> # Delete the example data and the test data directory
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No] |Yes: yes
Deleting "tests\osm_data\" ... Done.
```

GeofabrikReader.get_shp.pathname

GeofabrikReader.**get_shp.pathname**(*subregion_name*, *layer_name=None*, *feature_name=None*, *data_dir=None*)

Get path(s) to .shp file(s) for a geographic (sub)region (by searching a local data directory).

Parameters

- **subregion_name** (*str*) – name of a geographic (sub)region (case-insensitive) that is available on Geofabrik free download server
- **layer_name** (*str* / *None*) – name of a .shp layer (e.g. 'railways'), defaults to None
- **feature_name** (*str* / *None*) – name of a feature (e.g. 'rail'); if None (default), all available features included

- **data_dir** (str / None) – directory where the search is conducted; if None (default), the default directory

Returns

path(s) to .shp file(s)

Return type

list

Examples:

```
>>> from pydriosm.reader import GeofabrikReader
>>> from pyhelpers.dirs import delete_dir
>>> import os

>>> gfr = GeofabrikReader()

>>> subrgn_name = 'london'
>>> file_format = ".shp"
>>> dat_dir = "tests\osm_data"

>>> # Try to get the shapefiles' pathnames
>>> london_shp_path = gfr.get_shp_pathname(subrgn_name, data_dir=dat_dir)
>>> london_shp_path # An empty list if no data is available
[]

>>> # Download the shapefiles of London
>>> path_to_london_shp_zip = gfr.downloader.download_osm_data(
...     subrgn_name, file_format, dat_dir, verbose=True, ret_download_path=True)
To download .shp.zip data of the following geographic (sub)region(s):
    Greater London
? [No] |Yes: yes
Downloading "greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\" ... Done.

>>> type(path_to_london_shp_zip)
list
>>> len(path_to_london_shp_zip)
1

>>> # Extract the downloaded .zip file
>>> gfr.SHP.unzip_shp_zip(path_to_london_shp_zip[0], verbose=True)
Extracting "tests\osm_data\greater-london\greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.

>>> # Try again to get the shapefiles' pathnames
>>> london_shp_path = gfr.get_shp_pathname(subrgn_name, data_dir=dat_dir)
>>> len(london_shp_path) > 1
True

>>> # Get the file path of 'railways' shapefile
>>> lyr_name = 'railways'
>>> railways_shp_path = gfr.get_shp_pathname(subrgn_name, lyr_name, data_dir=dat_dir)
>>> len(railways_shp_path)
1
>>> railways_shp_path = railways_shp_path[0]
>>> os.path.relpath(railways_shp_path)
'tests\osm_data\greater-london\greater-london-latest-free-shp\gis_osm_railways_fr...

>>> # Get/save shapefile data of features labelled 'rail' only
```

(continues on next page)

(continued from previous page)

```

>>> feat_name = 'rail'
>>> railways_shp = gfr.SHP.read_layer_shps(
...     railways_shp_path, feature_names=feat_name, save_feat_shp=True)
>>> railways_shp.head()
   osm_id code ... coordinates shape_type
0 30804 6101 ... [(0.0048644, 51.6279262), (0.0061979, 51.62926... 3
1 101511 6101 ... [(-0.2119027, 51.5241906), (-0.2108059, 51.523... 3
2 361978 6101 ... [(-0.0298545, 51.6619398), (-0.0302322, 51.659... 3
3 2370155 6101 ... [(-0.3379005, 51.5937776), (-0.3367807, 51.593... 3
4 2526598 6101 ... [(-0.1886021, 51.3602632), (-0.1884216, 51.360... 3
[5 rows x 9 columns]

>>> # Get the file path to the data of 'rail'
>>> rail_shp_path = gfr.get_shp_pathname(subrgn_name, lyr_name, feat_name, dat_dir)
>>> len(rail_shp_path)
1
>>> rail_shp_path = rail_shp_path[0]
>>> os.path.relpath(rail_shp_path)
'tests\osm_data\greater-london\greater-london-latest-free-shp\railways\rail.shp'

>>> # Retrieve the data of 'rail' feature
>>> railways_rail_shp = gfr.SHP.read_layer_shps(rail_shp_path)
>>> railways_rail_shp.head()
   osm_id code ... coordinates shape_type
0 30804 6101 ... [(0.0048644, 51.6279262), (0.0061979, 51.62926... 3
1 101511 6101 ... [(-0.2119027, 51.5241906), (-0.2108059, 51.523... 3
2 361978 6101 ... [(-0.0298545, 51.6619398), (-0.0302322, 51.659... 3
3 2370155 6101 ... [(-0.3379005, 51.5937776), (-0.3367807, 51.593... 3
4 2526598 6101 ... [(-0.1886021, 51.3602632), (-0.1884216, 51.360... 3
[5 rows x 9 columns]

>>> # Delete the example data and the test data directory
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No] | Yes: yes
Deleting "tests\osm_data\" ... Done.

```

GeofabrikReader.merge_subregion_layer_shp

`GeofabrikReader.merge_subregion_layer_shp(subregion_names, layer_name, data_dir=None, engine='pyshp', update=False, download=True, rm_zip_extraction=True, merged_shp_dir=None, rm_shp_temp=True, verbose=False, ret_merged_shp_path=False)`

Merge shapefiles for a specific layer of two or multiple geographic regions.

Parameters

- `subregion_names` (`list`) – names of geographic region (case-insensitive) that is available on Geofabrik free download server
- `layer_name` (`str`) – name of a layer (e.g. ‘railways’)
- `engine` (`str`) – the method used to merge/save shapefiles; options include: ‘pyshp’ (default) and ‘geopandas’ (or ‘gpd’) if `engine='geopandas'`, this function relies on `geopandas.GeoDataFrame.to_file()`; otherwise, it by

default uses `shapefile.Writer()`

- `update (bool)` – whether to update the source .shp.zip files, defaults to False
- `download (bool)` – whether to ask for confirmation before starting to download a file, defaults to True
- `data_dir (str / None)` – directory where the .shp.zip data files are located/saved; if None (default), the default directory
- `rm_zip_extraction (bool)` – whether to delete the extracted files, defaults to False
- `rm_shp_temp (bool)` – whether to delete temporary layer files, defaults to False
- `merged_shp_dir (str / None)` – if None (default), use the layer name as the name of the folder where the merged .shp files will be saved
- `verbose (bool / int)` – whether to print relevant information in console, defaults to False
- `ret_merged_shp_path (bool)` – whether to return the path to the merged .shp file, defaults to False

Returns

the path to the merged file when `ret_merged_shp_path=True`

Return type

`list | str`

Examples:

```
>>> from pydriosm.reader import GeofabrikReader
>>> from pyhelpers.dirs import cd, delete_dir
>>> import os

>>> gfr = GeofabrikReader()
```

Example 1:

```
>>> # To merge 'railways' of Greater Manchester and West Yorkshire
>>> subrgn_name = ['Manchester', 'West Yorkshire']
>>> lyr_name = 'railways'
>>> dat_dir = "tests\osm_data"

>>> path_to_merged_shp_file = gfr.merge_subregion_layer_shp(
...     subrgn_name, lyr_name, dat_dir, verbose=True, ret_merged_shp_path=True)
To download .shp.zip data of the following geographic (sub)region(s):
    Greater Manchester
    West Yorkshire
? [No] | Yes: yes
Downloading "greater-manchester-latest-free.shp.zip"
    to "tests\osm_data\greater-manchester\" ... Done.
Downloading "west-yorkshire-latest-free.shp.zip"
    to "tests\osm_data\west-yorkshire\" ... Done.
Merging the following shapefiles:
    "greater-manchester_gis_osm_railways_free_1.shp"
    "west-yorkshire_gis_osm_railways_free_1.shp"
```

(continues on next page)

(continued from previous page)

```

In progress ... Done.
Find the merged shapefile at "tests\osm_data\gre_man-wes_yor-railways\".

>>> os.path.relpath(path_to_merged_shp_file)
'tests\osm_data\gre_man-wes_yor-railways\linestring.shp'

>>> # Read the merged data
>>> manchester_yorkshire_railways_shp = gfr.SHP.read_shp(path_to_merged_shp_file)
>>> manchester_yorkshire_railways_shp.head()
   osm_id  code    ...
0  928999  6101  ...
1  929904  6101  ...
2  929905  6102  ...
3  3663332  6102  ...
4  3996086  6101  ...

[5 rows x 9 columns]

>>> # Delete the merged files
>>> delete_dir(os.path.dirname(path_to_merged_shp_file), verbose=True)
To delete the directory "tests\osm_data\gre_man-wes_yor-railways\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\gre_man-wes_yor-railways\" ... Done.

>>> # Delete the downloaded .shp.zip data files
>>> delete_dir(list(map(os.path.dirname, gfr.downloader.data_paths)), verbose=True)
To delete the following directories:
  "tests\osm_data\greater-manchester\" (Not empty)
  "tests\osm_data\west-yorkshire\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\greater-manchester\" ... Done.
Deleting "tests\osm_data\west-yorkshire\" ... Done.

```

Example 2:

```

>>> # To merge 'transport' of Greater London, Kent and Surrey

>>> subrgn_name = ['London', 'Kent', 'Surrey']
>>> lyr_name = 'transport'

>>> path_to_merged_shp_file = gfr.merge_subregion_layer_shp(
...     subrgn_name, lyr_name, dat_dir, verbose=True, ret_merged_shp_path=True)
To download .shp.zip data of the following geographic (sub)region(s):
  Greater London
  Kent
  Surrey
? [No]|Yes: yes
Downloading "greater-london-latest-free.shp.zip"
  to "tests\osm_data\greater-london\" ... Done.
Downloading "kent-latest-free.shp.zip"
  to "tests\osm_data\kent\" ... Done.
Downloading "surrey-latest-free.shp.zip"
  to "tests\osm_data\surrey\" ... Done.
Merging the following shapefiles:
  "greater-london_gis_osm_transport_a_free_1.shp"
  "greater-london_gis_osm_transport_free_1.shp"
  "kent_gis_osm_transport_a_free_1.shp"
  "kent_gis_osm_transport_free_1.shp"
  "surrey_gis_osm_transport_a_free_1.shp"
  "surrey_gis_osm_transport_free_1.shp"

```

(continues on next page)

(continued from previous page)

```
In progress ... Done.
Find the merged shapefile at "tests\osm_data\gre_lon-ken-sur-transport\".

>>> type(path_to_merged_shp_file)
list
>>> len(path_to_merged_shp_file)
2
>>> os.path.relpath(path_to_merged_shp_file[0])
'tests\osm_data\gre-lon_ken_sur_transport\point.shp'
>>> os.path.relpath(path_to_merged_shp_file[1])
'tests\osm_data\gre-lon_ken_sur_transport\polygon.shp'

>>> # Read the merged shapefile
>>> merged_transport_shp_1 = gfr.SHP.read_shp(path_to_merged_shp_file[1])
>>> merged_transport_shp_1.head()
   osm_id ... shape_type
0 5077928 ... 5
1 8610280 ... 5
2 15705264 ... 5
3 23077379 ... 5
4 24016945 ... 5
[5 rows x 6 columns]

>>> # Delete the merged files
>>> delete_dir(os.path.commonpath(path_to_merged_shp_file), verbose=True)
To delete the directory "tests\osm_data\gre_lon-ken-sur-transport\" (Not empty)
? [No] |Yes: yes
Deleting "tests\osm_data\gre_lon-ken-sur-transport\" ... Done.

>>> # Delete the example data and the test data directory
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No] |Yes: yes
Deleting "tests\osm_data\" ... Done.
```

GeofabrikReader.read_osm_pbf

```
GeofabrikReader.read_osm_pbf(subregion_name, data_dir=None, readable=False, expand=False,
                             parse_geometry=False, parse_properties=False,
                             parse_other_tags=False, update=False, download=True,
                             pickle_it=False, ret_pickle_path=False, rm_pbf_file=False,
                             chunk_size_limit=50, verbose=False, **kwargs)
```

Read a PBF (.osm.pbf) data file of a geographic (sub)region.

Parameters

- **subregion_name** (*str*) – name of a geographic (sub)region (case-insensitive) that is available on Geofabrik free download server
- **data_dir** (*str* / *None*) – directory where the .osm.pbf data file is located/saved; if *None*, the default local directory
- **readable** (*bool*) – whether to parse each feature in the raw data, defaults to *False*
- **expand** (*bool*) – whether to expand dict-like data into separate columns,

defaults to False

- **parse_geometry (bool)** – whether to represent the 'geometry' field in a `shapely.geometry` format, defaults to False
- **parse_properties (bool)** – whether to represent the 'properties' field in a tabular format, defaults to False
- **parse_other_tags (bool)** – whether to represent a 'other_tags' (of 'properties') in a `dict` format, defaults to False
- **download (bool)** – whether to download/update the PBF data file of the given subregion, if it is not available at the specified path, defaults to True
- **update (bool)** – whether to check to update pickle backup (if available), defaults to False
- **pickle_it (bool)** – whether to save the .pbf data as a pickle file, defaults to False
- **ret_pickle_path (bool)** – (when `pickle_it=True`) whether to return a path to the saved pickle file
- **rm_pbf_file (bool)** – whether to delete the downloaded .osm.pbf file, defaults to False
- **chunk_size_limit (int / None)** – threshold (in MB) that triggers the use of chunk parser, defaults to 50; if the size of the .osm.pbf file (in MB) is greater than `chunk_size_limit`, it will be parsed in a chunk-wise way
- **verbose (bool / int)** – whether to print relevant information in console as the function runs, defaults to False
- **kargs** – [optional] parameters of the method `_Reader.read_osm_pbf()`

Returns

dictionary of the .osm.pbf data; when `pickle_it=True`, return a tuple of the dictionary and a path to the pickle file

Return type

`dict | tuple | None`

Examples:

```
>>> from pydriosm.reader import GeofabrikReader
>>> from pyhelpers.dirs import delete_dir

>>> gfr = GeofabrikReader()

>>> subrgn_name = 'rutland'
>>> dat_dir = "tests\osm_data"

>>> # If the PBF data of Rutland is not available at the specified data directory,
>>> # the function can download the latest data by setting `download=True` (default)
>>> pbf_raw = gfr.read_osm_pbf(subrgn_name, data_dir=dat_dir, verbose=True)
Downloading "rutland-latest.osm.pbf"
    to "tests\osm_data\rutland\" ... Done.
Reading "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
>>> type(pbf_raw)
dict
```

(continues on next page)

(continued from previous page)

```

>>> list(pbf_raw.keys())
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']

>>> pbf_raw_points = pbf_raw['points']
>>> type(pbf_raw_points)
list
>>> type(pbf_raw_points[0])
osgeo.ogr.Feature

>>> # Set `readable=True`
>>> pbf_parsed = gfr.read_osm_pbf(subrgn_name, dat_dir, readable=True, verbose=True)
Parsing "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
>>> pbf_parsed_points = pbf_parsed['points']
>>> pbf_parsed_points.head()
0    {'type': 'Feature', 'geometry': {'type': 'Poin...
1    {'type': 'Feature', 'geometry': {'type': 'Poin...
2    {'type': 'Feature', 'geometry': {'type': 'Poin...
3    {'type': 'Feature', 'geometry': {'type': 'Poin...
4    {'type': 'Feature', 'geometry': {'type': 'Poin...
Name: points, dtype: object

>>> # Set `expand=True`, which would force `readable=True`
>>> pbf_parsed_ = gfr.read_osm_pbf(subrgn_name, dat_dir, expand=True, verbose=True)
Parsing "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
>>> pbf_parsed_points_ = pbf_parsed_[['points']]
>>> pbf_parsed_points_.head()
   id ... properties
0  488432 ... {'osm_id': '488432', 'name': None, 'barrier': ...
1  488658 ... {'osm_id': '488658', 'name': 'Tickencote Inter...
2  13883868 ... {'osm_id': '13883868', 'name': None, 'barrier': ...
3  14049101 ... {'osm_id': '14049101', 'name': None, 'barrier': ...
4  14558402 ... {'osm_id': '14558402', 'name': None, 'barrier': ...
[5 rows x 3 columns]

>>> # Set `readable` and `parse_geometry` to be `True`
>>> pbf_parsed_1 = gfr.read_osm_pbf(subrgn_name, dat_dir, readable=True,
...                               parse_geometry=True)
>>> pbf_parsed_1_point = pbf_parsed_1['points'][0]
>>> pbf_parsed_1_point['geometry']
'POINT (-0.5134241 52.6555853)'
>>> pbf_parsed_1_point['properties']['other_tags']
'"odbl"=>"clean"'

>>> # Set `readable` and `parse_other_tags` to be `True`
>>> pbf_parsed_2 = gfr.read_osm_pbf(subrgn_name, dat_dir, readable=True,
...                               parse_other_tags=True)
>>> pbf_parsed_2_point = pbf_parsed_2['points'][0]
>>> pbf_parsed_2_point['geometry']
{'type': 'Point', 'coordinates': [-0.5134241, 52.6555853]}
>>> pbf_parsed_2_point['properties']['other_tags']
{'odbl': 'clean'}

>>> # Set `readable`, `parse_geometry` and `parse_other_tags` to be `True`
>>> pbf_parsed_3 = gfr.read_osm_pbf(subrgn_name, dat_dir, readable=True,
...                               parse_geometry=True, parse_other_tags=True)
>>> pbf_parsed_3_point = pbf_parsed_3['points'][0]
>>> pbf_parsed_3_point['geometry']
'POINT (-0.5134241 52.6555853)'
>>> pbf_parsed_3_point['properties']['other_tags']

```

(continues on next page)

(continued from previous page)

```
{'odbl': 'clean'}
```

```
>>> # Delete the example data and the test data directory
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No] |Yes: yes
Deleting "tests\osm_data\" ... Done.
```

GeofabrikReader.read_shp_zip

```
GeofabrikReader.read_shp_zip(subregion_name, layer_names=None, feature_names=None,
                             data_dir=None, update=False, download=True, pickle_it=False,
                             ret_pickle_path=False, rm_extraction=False, rm_shp_zip=False,
                             verbose=False, **kwargs)
```

Read a .shp.zip data file of a geographic (sub)region.

Parameters

- **subregion_name** (*str*) – name of a geographic (sub)region (case-insensitive) that is available on Geofabrik free download server
- **layer_names** (*str* / *list* / *None*) – name of a .shp layer, e.g. ‘railways’, or names of multiple layers; if *None* (default), all available layers
- **feature_names** (*str* / *list* / *None*) – name of a feature, e.g. ‘rail’, or names of multiple features; if *None* (default), all available features
- **data_dir** (*str* / *None*) – directory where the .shp.zip data file is located/saved; if *None*, the default directory
- **update** (*bool*) – whether to check to update pickle backup (if available), defaults to *False*
- **download** (*bool*) – whether to ask for confirmation before starting to download a file, defaults to *True*
- **pickle_it** (*bool*) – whether to save the .shp data as a pickle file, defaults to *False*
- **ret_pickle_path** (*bool*) – (when *pickle_it=True*) whether to return a path to the saved pickle file
- **rm_extraction** (*bool*) – whether to delete extracted files from the .shp.zip file, defaults to *False*
- **rm_shp_zip** (*bool*) – whether to delete the downloaded .shp.zip file, defaults to *False*
- **verbose** (*bool* / *int*) – whether to print relevant information in console as the function runs, defaults to *False*

Returns

dictionary of the shapefile data, with keys and values being layer names and tabular data (in the format of `geopandas.GeoDataFrame`), respectively

Return type

dict | collections.OrderedDict | None

Examples:

```
>>> from pydriosm.reader import GeofabrikReader
>>> from pyhelpers.dirs import delete_dir

>>> gfr = GeofabrikReader()

>>> subrgn_name = 'London'
>>> dat_dir = "tests\osm_data"

>>> london_shp_data = gfr.read_shp_zip(
...     subregion_name=subrgn_name, data_dir=dat_dir, download=False, verbose=True)
The .shp.zip file for "Greater London" is not found.

>>> # Set `download=True`
>>> london_shp_data = gfr.read_shp_zip(
...     subregion_name=subrgn_name, data_dir=dat_dir, download=True, verbose=True)
Downloading "greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\" ... Done.
Extracting "tests\osm_data\greater-london\greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.
Reading the shapefile(s) at
    "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.
>>> type(london_shp_data)
collections.OrderedDict
>>> list(london_shp_data.keys())
['buildings',
 'landuse',
 'natural',
 'places',
 'pofw',
 'pois',
 'railways',
 'roads',
 'traffic',
 'transport',
 'water',
 'waterways']

>>> # Data of the 'railways' layer
>>> london_shp_railways = london_shp_data['railways']
>>> london_shp_railways.head()
   osm_id code ... coordinates shape_type
0  30804  6101 ... [(0.0048644, 51.6279262), (0.0061979, 51.62926... 3
1  101298 6103 ... [(-0.2249906, 51.493682), (-0.2251678, 51.4945... 3
2  101486 6103 ... [(-0.2055497, 51.5195429), (-0.2051377, 51.519... 3
3  101511  6101 ... [(-0.2119027, 51.5241906), (-0.2108059, 51.523... 3
4  282898 6103 ... [(-0.1862586, 51.6159083), (-0.1868721, 51.613... 3
[5 rows x 9 columns]

>>> # Read data of the 'transport' layer only from the original .shp.zip file
>>> # (and delete any extracts)
>>> subrgn_layer = 'transport'

>>> # Set `rm_extracts=True` to remove the extracts
>>> london_shp_transport = gfr.read_shp_zip(
...     subregion_name=subrgn_name, layer_names=subrgn_layer, data_dir=dat_dir,
```

(continues on next page)

(continued from previous page)

```

...      rm_extracts=True, verbose=True)
Reading the shapefile(s) at
    "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.
Deleting the extracts "tests\osm_data\greater-london\greater-london-latest-free-sh...
>>> type(london_shp_transport)
collections.OrderedDict
>>> list(london_shp_transport.keys())
['transport']
>>> london_shp_transport_ = london_shp_transport['transport']
>>> london_shp_transport_.head()
   osm_id ... shape_type
0  5077928 ...      5
1  8610280 ...      5
2  15705264 ...      5
3  23077379 ...      5
4  24016945 ...      5
[5 rows x 6 columns]

>>> # Read data of only the 'bus_stop' feature (in the 'transport' layer)
>>> # from the original .shp.zip file (and delete any extracts)
>>> feat_name = 'bus_stop'
>>> london_bus_stop = gfr.read_shp_zip(
...     subregion_name=subrgn_name, layer_names=subrgn_layer, feature_names=feat_name,
...     data_dir=dat_dir, rm_extracts=True, verbose=True)
Extracting the following layer(s):
    'transport'
    from "tests\osm_data\greater-london\greater-london-latest-free.shp.zip"
        to "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.
Reading the shapefile(s) at
    "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.
Deleting the extracts "tests\osm_data\greater-london\greater-london-latest-free-sh...
>>> type(london_bus_stop)
collections.OrderedDict
>>> list(london_bus_stop.keys())
['transport']

>>> fclass = london_bus_stop['transport'].fclass.unique()
>>> fclass
array(['bus_stop'], dtype=object)

>>> # Read multiple features of multiple layers
>>> # (and delete both the original .shp.zip file and extracts)
>>> subrgn_layers = ['traffic', 'roads']
>>> feat_names = ['parking', 'trunk']
>>> london_shp_tra_roa_par_tru = gfr.read_shp_zip(
...     subregion_name=subrgn_name, layer_names=subrgn_layers, feature_names=feat_names,
...     data_dir=dat_dir, rm_extracts=True, rm_shp_zip=True, verbose=True)
Extracting the following layer(s):
    'traffic'
    'roads'
    from "tests\osm_data\greater-london\greater-london-latest-free.shp.zip"
        to "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.
Reading the shapefile(s) at
    "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.
Deleting the extracts "tests\osm_data\greater-london\greater-london-latest-free-sh...
Deleting "tests\osm_data\greater-london\greater-london-latest-free.shp.zip" ... Done.
>>> type(london_shp_tra_roa_par_tru)
collections.OrderedDict
>>> list(london_shp_tra_roa_par_tru.keys())

```

(continues on next page)

(continued from previous page)

```

['traffic', 'roads']

>>> # Data of the 'traffic' layer
>>> london_shp_tra_roa_par_tru['traffic'].head()
   osm_id code ... coordinates shape_type
0 2956081 5260 ... [(-0.0218269, 51.4369515), (-0.020097, 51.4372... 5
1 2956183 5260 ... [(-0.0224697, 51.4452646), (-0.0223272, 51.445... 5
2 2956184 5260 ... [(-0.0186703, 51.444221), (-0.0185442, 51.4447... 5
3 2956185 5260 ... [(-0.0189846, 51.4481958), (-0.0189417, 51.448... 5
4 2956473 5260 ... [(-0.0059602, 51.4579088), (-0.0058695, 51.457... 5
[5 rows x 6 columns]

>>> # Data of the 'roads' layer
>>> london_shp_tra_roa_par_tru['roads'].head()
   osm_id code ... coordinates shape_type
7 1200 5112 ... [(-0.2916285, 51.5160418), (-0.2915517, 51.516... 3
8 1201 5112 ... [(-0.2925582, 51.5300857), (-0.2925916, 51.529... 3
9 1202 5112 ... [(-0.2230893, 51.5735075), (-0.2228416, 51.573... 3
10 1203 5112 ... [(-0.139105, 51.6101568), (-0.1395372, 51.6100... 3
11 1208 5112 ... [(-0.1176027, 51.6124616), (-0.1169584, 51.612... 3
[5 rows x 12 columns]

>>> # Delete the example data and the test data directory
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No] | Yes: yes
Deleting "tests\osm_data\" ... Done.

```

BBBikeReader

`class pydriosm.reader.BBBikeReader(data_dir=None, max_tmpfile_size=None)`

Read BBBike exports of OpenStreetMap data.

Parameters

- `data_dir (str / None)` – (a path or a name of) a directory where a data file is; if `None` (default), a folder `osm_bbbike` under the current working directory
- `max_tmpfile_size (int / None)` – defaults to `None`, see also `gdal_configurations`

Variables

- `downloader (BBBikeDownloader)` – instance of the class `BBBikeDownloader`
- `name (str)` – name of the data resource
- `url (str)` – url of the homepage to the BBBike free download server

Examples:

```

>>> from pydriosm.reader import BBBikeReader

>>> bbr = BBBikeReader()

>>> bbr.NAME
'BBBike'

```

Attributes

<code>DEFAULT_DOWNLOAD_DIR</code>	str: Default download directory.
<code>FILE_FORMATS</code>	set: Valid file formats.

BBBikeReader.DEFAULT_DOWNLOAD_DIR

```
BBBikeReader.DEFAULT_DOWNLOAD_DIR = 'osm_data\\bbbike'
str: Default download directory.
```

BBBikeReader.FILE_FORMATS

```
BBBikeReader.FILE_FORMATS = {'.csv.xz', '.garmin-onroad-latin1.zip',
'.garmin-onroad.zip', '.garmin-opentopo.zip', '.garmin-osm.zip',
'.geojson.xz', '.gz', '.mapsforge-osm.zip', '.pbf', '.shp.zip',
'.svg-osm.zip'}
set: Valid file formats.
```

Methods

<code>read_csv_xz(subregion_name[, data_dir, ...])</code>	Read a compressed CSV (.csv.xz) data file of a geographic (sub)region.
<code>read_geojson_xz(subregion_name[, data_dir, ...])</code>	Read a .geojson.xz data file of a geographic (sub)region.
<code>read_osm_pbf(subregion_name[, data_dir, ...])</code>	Read a PBF (.osm.pbf) data file of a geographic (sub)region.
<code>read_shp_zip(subregion_name[, layer_names, ...])</code>	Read a shapefile of a geographic (sub)region.

BBBikeReader.read_csv_xz

```
BBBikeReader.read_csv_xz(subregion_name, data_dir=None, download=False, verbose=False,
**kwargs)
```

Read a compressed CSV (.csv.xz) data file of a geographic (sub)region.

Parameters

- `subregion_name (str)` – name of a geographic (sub)region (case-insensitive) that is available on BBBike free download server
- `data_dir (str / None)` – directory where the .csv.xz data file is located/saved; if None (default), the default directory
- `download (bool)` – whether to try to download the requisite data file if it does not exist, defaults to True

- **verbose** (bool / int) – whether to print relevant information in console as the function runs, defaults to False

Returns

tabular data of the .csv.xz file

Return type

pandas.DataFrame | None

Examples:

```
>>> from pydriosm.reader import BBBikeReader
>>> from pyhelpers.dirs import cd, delete_dir

>>> bbr = BBBikeReader()

>>> subrgn_name = 'Leeds'
>>> dat_dir = "tests\osm_data"

>>> leeds_csv_xz = bbr.read_csv_xz(subrgn_name, dat_dir, verbose=True)
The requisite data file "tests\osm_data\leeds\Leeds.osm.csv.xz" does not exist.

>>> leeds_csv_xz = bbr.read_csv_xz(subrgn_name, dat_dir, verbose=True, download=True)
Downloading "Leeds.osm.csv.xz"
to "tests\osm_data\leeds\" ... Done.
Parsing the data ... Done.

>>> leeds_csv_xz.head()
   type      id feature  note
0  node  154915    None  None
1  node  154916    None  None
2  node  154921    None  None
3  node  154922    None  None
4  node  154923    None  None

>>> # Delete the downloaded .csv.xz data file
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.
```

BBBikeReader.read_geojson_xz

`BBBikeReader.read_geojson_xz(subregion_name, data_dir=None, parse_geometry=False, download=False, verbose=False, **kwargs)`

Read a .geojson.xz data file of a geographic (sub)region.

Parameters

- **subregion_name** (str) – name of a geographic (sub)region (case-insensitive) that is available on BBBike free download server
- **data_dir** (str / None) – directory where the .geojson.xz data file is located/saved; if None (default), the default directory
- **parse_geometry** (bool) – whether to represent coordinates in a format of a geometric object, defaults to False

- **download (bool)** – whether to try to download the requisite data file if it does not exist, defaults to True
- **verbose (bool / int)** – whether to print relevant information in console as the function runs, defaults to False

Returns

tabular data of the .csv.xz file

Return type

pandas.DataFrame | None

Examples:

```
>>> from pydriosm.reader import BBBikeReader
>>> from pyhelpers.dirs import cd, delete_dir
>>> import os

>>> bbr = BBBikeReader()

>>> subrgn_name = 'Leeds'
>>> dat_dir = "tests\osm_data"

>>> leeds_geoj = bbr.read_geojson_xz(subrgn_name, dat_dir, verbose=True)
The requisite data file "tests\osm_data\leeds\Leeds.osm.geojson.xz" does not exist.

>>> # Set `try_download=True`
>>> leeds_geoj = bbr.read_geojson_xz(subrgn_name, dat_dir, verbose=True, download=True)
Downloading "Leeds.osm.geojson.xz"
    to "tests\osm_data\leeds\" ... Done.
Parsing the data ... Done.
>>> leeds_geoj.head()
      geometry           properties
0  {'type': 'Point', 'coordinates': [-1.5558097, ...  {'highway': 'motorway_junction'...
1  {'type': 'Point', 'coordinates': [-1.34293, 53...  {'highway': 'motorway_junction'...
2  {'type': 'Point', 'coordinates': [-1.517335, 5...  {'highway': 'motorway_junction'...
3  {'type': 'Point', 'coordinates': [-1.514124, 5...  {'highway': 'motorway_junction'...
4  {'type': 'Point', 'coordinates': [-1.516511, 5...  {'highway': 'motorway_junction'...

>>> # Set `parse_geometry` to be True
>>> leeds_geoj_ = bbr.read_geojson_xz(subrgn_name, dat_dir, parse_geometry=True,
...                                         verbose=True)
Parsing "tests\osm_data\leeds\Leeds.osm.geojson.xz" ... Done.
>>> leeds_geoj_[['geometry']].head()
0    POINT (-1.5560511 53.6879848)
1    POINT (-1.34293 53.844618)
2    POINT (-1.517335 53.7499667)
3    POINT (-1.514124 53.7416937)
4    POINT (-1.516511 53.7256632)
Name: geometry, dtype: object

>>> # Delete the download directory
>>> delete_dir(dat_dir, verbose=True)
```

BBBikeReader.read_osm_pbf

```
BBBikeReader.read_osm_pbf(subregion_name, data_dir=None, readable=False, expand=False,
                           parse_geometry=False, parse_other_tags=False,
                           parse_properties=False, update=False, download=True,
                           pickle_it=False, ret_pickle_path=False, rm_pbf_file=False,
                           chunk_size_limit=50, verbose=False, **kwargs)
```

Read a PBF (.osm.pbf) data file of a geographic (sub)region.

Parameters

- **subregion_name** (*str*) – name of a geographic (sub)region (case-insensitive) that is available on Geofabrik free download server
- **data_dir** (*str* / *None*) – directory where the .osm.pbf data file is located/saved; if *None*, the default local directory
- **readable** (*bool*) – whether to parse each feature in the raw data, defaults to *False*
- **expand** (*bool*) – whether to expand dict-like data into separate columns, defaults to *False*
- **parse_geometry** (*bool*) – whether to represent the 'geometry' field in a `shapely.geometry` format, defaults to *False*
- **parse_properties** (*bool*) – whether to represent the 'properties' field in a tabular format, defaults to *False*
- **parse_other_tags** (*bool*) – whether to represent a 'other_tags' (of 'properties') in a `dict` format, defaults to *False*
- **download** (*bool*) – whether to download/update the PBF data file of the given subregion, if it is not available at the specified path, defaults to *True*
- **update** (*bool*) – whether to check to update pickle backup (if available), defaults to *False*
- **pickle_it** (*bool*) – whether to save the .pbf data as a pickle file, defaults to *False*
- **ret_pickle_path** (*bool*) – (when `pickle_it=True`) whether to return a path to the saved pickle file
- **rm_pbf_file** (*bool*) – whether to delete the downloaded .osm.pbf file, defaults to *False*
- **chunk_size_limit** (*int* / *None*) – threshold (in MB) that triggers the use of chunk parser, defaults to 50; if the size of the .osm.pbf file (in MB) is greater than `chunk_size_limit`, it will be parsed in a chunk-wise way
- **verbose** (*bool* / *int*) – whether to print relevant information in console as the function runs, defaults to *False*
- **kwargs** – [optional] parameters of the method `_Reader.read_osm_pbf()`

Returns

dictionary of the .osm.pbf data; when pickle_it=True, return a tuple of the dictionary and a path to the pickle file

Return type

dict | tuple | None

Examples:

```
>>> from pydriosm.reader import BBBikeReader
>>> from pyhelpers.dirs import delete_dir

>>> bbr = BBBikeReader()

>>> subrgn_name = 'Leeds'
>>> dat_dir = "tests\osm_data"

>>> leeds_pbf_raw = bbr.read_osm_pbf(subrgn_name, data_dir=dat_dir, verbose=True)
Downloading "Leeds.osm.pbf"
    to "tests\osm_data\leeds\" ... Done.
Reading "tests\osm_data\leeds\Leeds.osm.pbf" ... Done.
>>> type(leeds_pbf_raw)
dict
>>> list(leeds_pbf_raw.keys())
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']

>>> pbf_raw_points = leeds_pbf_raw['points']
>>> type(pbf_raw_points)
list
>>> type(pbf_raw_points[0])
osgeo.ogr.Feature

>>> # (Parsing the data in this example might take up to a few minutes.)
>>> leeds_pbf_parsed = bbr.read_osm_pbf(
...     subrgn_name, data_dir=dat_dir, readable=True, expand=True,
...     parse_geometry=True, parse_other_tags=True, parse_properties=True,
...     verbose=True)
Parsing "tests\osm_data\leeds\Leeds.osm.pbf" ... Done.

>>> list(leeds_pbf_parsed.keys())
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']

>>> # Data of the 'multipolygons' layer
>>> leeds_pbf_parsed_multipolygons = leeds_pbf_parsed['multipolygons']
>>> leeds_pbf_parsed_multipolygons.head()
   id                      geometry ... tourism other_tags
0 10595  (POLYGON ((-1.5030223 53.6725382, -1.5034495 5... ... None None
1 10600  (POLYGON ((-1.5116994 53.6764287, -1.5099361 5... ... None None
2 10601  (POLYGON ((-1.5142403 53.6710831, -1.5143686 5... ... None None
3 10612  (POLYGON ((-1.5129341 53.6704885, -1.5131883 5... ... None None
4 10776  (POLYGON ((-1.5523801 53.7029081, -1.5524772 5... ... None None
[5 rows x 26 columns]

>>> # Delete the example data and the test data directory
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.
```

See also:

- Examples for the method `GeofabrikReader.read_osm_pbf()`.

`BBBikeReader.read_shp_zip`

```
BBBikeReader.read_shp_zip(subregion_name, layer_names=None, feature_names=None,
                           data_dir=None, update=False, download=True, pickle_it=False,
                           ret_pickle_path=False, rm_extraction=False, rm_shp_zip=False,
                           verbose=False, **kwargs)
```

Read a shapefile of a geographic (sub)region.

Parameters

- `subregion_name` (`str`) – name of a geographic (sub)region (case-insensitive) that is available on BBBike free download server
- `layer_names` (`str` / `list` / `None`) – name of a .shp layer, e.g. ‘railways’, or names of multiple layers; if `None` (default), all available layers
- `feature_names` (`str` / `list` / `None`) – name of a feature, e.g. ‘rail’, or names of multiple features; if `None` (default), all available features
- `data_dir` (`str` / `None`) – directory where the .shp.zip data file is located/saved; if `None`, the default directory
- `update` (`bool`) – whether to check to update pickle backup (if available), defaults to `False`
- `download` (`bool`) – whether to ask for confirmation before starting to download a file, defaults to `True`
- `pickle_it` (`bool`) – whether to save the .shp data as a pickle file, defaults to `False`
- `ret_pickle_path` (`bool`) – (when `pickle_it=True`) whether to return a path to the saved pickle file
- `rm_extraction` (`bool`) – whether to delete extracted files from the .shp.zip file, defaults to `False`
- `rm_shp_zip` (`bool`) – whether to delete the downloaded .shp.zip file, defaults to `False`
- `verbose` (`bool` / `int`) – whether to print relevant information in console as the function runs, defaults to `False`

Returns

dictionary of the shapefile data, with keys and values being layer names and tabular data (in the format of `geopandas.GeoDataFrame`), respectively; when `pickle_it=True`, return a tuple of the dictionary and a path to the pickle file

Return type

`dict` | `collections.OrderedDict` | `tuple` | `None`

Examples:

```

>>> from pydriosm.reader import BBBikeReader
>>> from pyhelpers.dirs import delete_dir
>>> import os

>>> bbr = BBBikeReader()

>>> subrgn_name = 'Birmingham'
>>> dat_dir = "tests\osm_data"

>>> bham_shp = bbr.read_shp_zip(
...     subregion_name=subrgn_name, data_dir=dat_dir, download=False, verbose=True)
The .shp.zip file for "Birmingham" is not found.

>>> # Set `download=True`
>>> bham_shp = bbr.read_shp_zip(
...     subregion_name=subrgn_name, data_dir=dat_dir, download=True, verbose=True)
Downloading "Birmingham.osm.shp.zip"
    to "tests\osm_data\birmingham\" ... Done.
Extracting "tests\osm_data\birmingham\Birmingham.osm.shp.zip"
    to "tests\osm_data\birmingham\" ... Done.
Reading the shapefile(s) at
    "tests\osm_data\birmingham\Birmingham-shp\shape\" ... Done.
>>> type(bham_shp)
collections.OrderedDict
>>> list(bham_shp.keys())
['buildings',
 'landuse',
 'natural',
 'places',
 'points',
 'railways',
 'roads',
 'waterways']

>>> # Data of 'railways' layer
>>> bham_railways_shp = bham_shp['railways']
>>> bham_railways_shp.head()
    osm_id ... shape_type
0      740 ...      3
1     2148 ...      3
2   2950000 ...      3
3   3491845 ...      3
4   3981454 ...      3
[5 rows x 5 columns]

>>> # Read data of 'road' layer only from the original .shp.zip file
>>> # (and delete all extracts)
>>> lyr_name = 'roads'
>>> bham_roads_shp = bbr.read_shp_zip(
...     subregion_name=subrgn_name, layer_names=lyr_name, data_dir=dat_dir,
...     rm_extracts=True, verbose=True)
Reading "tests\osm_data\birmingham\Birmingham-shp\shape\roads.shp" ... Done.
Deleting the extracts "tests\osm_data\birmingham\Birmingham-shp\" ... Done.
>>> type(bham_roads_shp)
collections.OrderedDict
>>> list(bham_roads_shp.keys())
['roads']
>>> bham_roads_shp[lyr_name].head()
    osm_id ... shape_type
0      37 ...      3

```

(continues on next page)

(continued from previous page)

```

1      38 ...      3
2      41 ...      3
3      45 ...      3
4      46 ...      3
[5 rows x 9 columns]

>>> # Read data of multiple layers and features from the original .shp.zip file
>>> # (and delete all extracts)
>>> lyr_names = ['railways', 'waterways']
>>> feat_names = ['rail', 'canal']
>>> bham_rw_rc_shp = bbr.read_shp_zip(
...     subregion_name=subrgn_name, layer_names=lyr_names, feature_names=feat_names,
...     data_dir=dat_dir, rm_extracts=True, rm_shp_zip=True, verbose=True)
Extracting the following layer(s):
'railways'
'waterways'
from "tests\osm_data\birmingham\Birmingham.osm.shp.zip"
to "tests\osm_data\birmingham\" ... Done.
Reading the data at "tests\osm_data\birmingham\Birmingham-shp\shape\" ... Done.
Deleting the extracts "tests\osm_data\birmingham\Birmingham-shp\" ... Done.
Deleting "tests\osm_data\birmingham\Birmingham.osm.shp.zip" ... Done.
>>> type(bham_rw_rc_shp)
collections.OrderedDict
>>> list(bham_rw_rc_shp.keys())
['railways', 'waterways']

>>> # Data of the 'railways' layer
>>> bham_rw_rc_shp_railways = bham_rw_rc_shp['railways']
>>> bham_rw_rc_shp_railways[['type', 'name']].head()
   type                               name
0  rail           Cross-City Line
1  rail           Cross-City Line
2  rail  Derby to Birmingham (Proof House Junction) Line
3  rail           Birmingham to Peterborough Line
4  rail  Water Orton to Park Lane Junction Curve

>>> # Data of the 'waterways' layer
>>> bham_rw_rc_shp_waterways = bham_rw_rc_shp['waterways']
>>> bham_rw_rc_shp_waterways[['type', 'name']].head()
   type                               name
2  canal  Birmingham and Fazeley Canal
8  canal  Birmingham and Fazeley Canal
9  canal  Birmingham Old Line Canal Navigations - Rotton P
10  canal           Oozells Street Loop
11  canal  Worcester & Birmingham Canal

>>> # Delete the example data and the test data directory
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.

```

3.3 ios

Implement storage I/O of (parsed) OSM data extracts with PostgreSQL.

3.3.1 Storage I/O of data

`PostgresOSM([host, port, username, ...])`

Implement storage I/O of OSM data with PostgreSQL.

PostgresOSM

```
class pydriosm.ios.PostgresOSM(host=None, port=None, username=None, password=None,
                                database_name=None, data_source='Geofabrik',
                                max_tmpfile_size=None, data_dir=None, **kwargs)
```

Implement storage I/O of OSM data with PostgreSQL.

Parameters

- **host** (`str / None`) – host name/address of a PostgreSQL server, e.g. '`localhost`' or '`127.0.0.1`' (default by installation of PostgreSQL); when `host=None` (default), it is initialized as '`localhost`'
- **port** (`int / None`) – listening port used by PostgreSQL; when `port=None` (default), it is initialized as 5432 (default by installation of PostgreSQL)
- **username** (`str / None`) – username of a PostgreSQL server; when `username=None` (default), it is initialized as '`postgres`' (default by installation of PostgreSQL)
- **password** (`str / int / None`) – user password; when `password=None` (default), it is required to manually type in the correct password to connect the PostgreSQL server
- **database_name** (`str / None`) – name of a database; when `database_name=None` (default), it is initialized as '`postgres`' (default by installation of PostgreSQL)
- **confirm_db_creation** – whether to prompt a confirmation before creating a new database (if the specified database does not exist), defaults to `False`
- **data_source** (`str`) – name of data source, defaults to '`Geofabrik`'; options include `{'Geofabrik', 'BBBike'}`
- **max_tmpfile_size** (`int / None`) – defaults to `None`, see also the function `pyhelpers.settings.gdal_configurations()`
- **data_dir** (`str / None`) – directory where the data file is located/saved, defaults to `None`; when `data_dir=None`, it should be the same as the directory specified by the corresponding `downloader / reader`
- **kwargs** – [optional] parameters of the class `pyhelpers.sql.PostgreSQL`

Variables

`data_source` (str) – name of data sources, options include {'Geofabrik', 'BBBike'}

Examples:

```
>>> from pydriosm.ios import PostgresOSM

>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.

>>> osmdb.data_source
'Geofabrik'
>>> type(osmdb.downloader)
pydriosm.downloader.GeofabrikDownloader
>>> type(osmdb.reader)
pydriosm.reader.GeofabrikReader

>>> # Change the data source
>>> osmdb.data_source = 'BBBike'
>>> type(osmdb.downloader)
pydriosm.downloader.BBBikeDownloader
>>> type(osmdb.reader)
pydriosm.reader.BBBikeReader

>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:**@localhost:5432
? [No]|Yes: yes
Dropping "osmdb_test" ... Done.
```

Attributes

<code>DATA_SOURCES</code>	list: Names of the data sources.
<code>DATA_TYPES</code>	dict: Specify a data-type dictionary for data or columns in PostgreSQL database and Pandas.
<code>downloader</code>	Instance of either the class <code>GeofabrikDownloader</code> or <code>BBBikeDownloader</code> , depending on the specified <code>data_source</code> for creating an instance of the class <code>PostgresOSM</code> .
<code>name</code>	Name of the current property <code>downloader</code> .
<code>reader</code>	Instance of either <code>GeofabrikReader</code> or <code>BBBikeReader</code> , depending on the specified <code>data_source</code> for creating an instance of the class <code>PostgresOSM</code> .
<code>url</code>	Homepage URL of data resource for current property <code>downloader</code> .

PostgresOSM.DATA_SOURCES

`PostgresOSM.DATA_SOURCES = ['Geofabrik', 'BBBike']`

list: Names of the data sources.

PostgresOSM.DATA_TYPES

`PostgresOSM.DATA_TYPES = {'bigint': <class 'numpy.int64'>, 'json': <class 'str'>, 'text': <class 'str'>}`

dict: Specify a data-type dictionary for data or columns in PostgreSQL database and Pandas.

PostgresOSM.downloader

`property PostgresOSM.downloader`

Instance of either the class `GeofabrikDownloader` or `BBBikeDownloader`, depending on the specified data_source for creating an instance of the class `PostgresOSM`.

Examples:

```
>>> from pydriosm.ios import PostgresOSM

>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.

>>> osmdb.data_source
'Geofabrik'
>>> type(osmdb.downloader)
pydriosm.downloader.GeofabrikDownloader

>>> # Change the data source
>>> osmdb.data_source = 'BBBike'
>>> type(osmdb.downloader)
pydriosm.downloader.BBBikeDownloader

>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:**@localhost:5432
? [No]|Yes: yes
Dropping "osmdb_test" ... Done.
```

PostgresOSM.name

property PostgresOSM.name

Name of the current property *downloader*.

Examples:

```
>>> from pydriosm.ios import PostgresOSM

>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.

>>> osmdb.data_source
'Geofabrik'
>>> osmdb.name
'Geofabrik OpenStreetMap data extracts'

>>> # Change the data source
>>> osmdb.data_source = 'BBBike'
>>> osmdb.name
'BBBike exports of OpenStreetMap data'

>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:**@localhost:5432
? [No] |Yes: yes
Dropping "osmdb_test" ... Done.
```

PostgresOSM.reader

property PostgresOSM.reader

Instance of either *GeofabrikReader* or *BBBikeReader*, depending on the specified *data_source* for creating an instance of the class *PostgresOSM*.

Examples:

```
>>> from pydriosm.ios import PostgresOSM

>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.

>>> type(osmdb.reader)
pydriosm.reader.GeofabrikReader

>>> # Change the data source
>>> osmdb.data_source = 'BBBike'
>>> type(osmdb.reader)
pydriosm.reader.BBBikeReader

>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:**@localhost:5432
```

(continues on next page)

(continued from previous page)

```
? [No] |Yes: yes
Dropping "osmdb_test" ... Done.
```

PostgresOSM.url

property PostgresOSM.url

Homepage URL of data resource for current property *downloader*.

Examples:

```
>>> from pydriosm.ios import PostgresOSM

>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.

>>> osmdb.url
'https://download.geofabrik.de/'

>>> # Change the data source
>>> osmdb.data_source = 'BBBike'
>>> osmdb.url
'https://download.bbbike.org/osm/bbbike/'

>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:**@localhost:5432
? [No] |Yes: yes
Dropping "osmdb_test" ... Done.
```

Methods

<code>decode_pbf_layer(layer_dat[, decode_geojson])</code>	Process raw data of a PBF layer retrieved from database.
<code>drop_subregion_tables(subregion_names[, ...])</code>	Delete all or specific schemas/layers of subregion data from the database being connected.
<code>fetch_osm_data(subregion_name[, ...])</code>	Fetch OSM data (of one or multiple layers) of a geographic (sub)region.
<code>get_table_column_info(subregion_name, layer_name)</code>	Get information about columns of a specific schema and table data of a geographic (sub)region.
<code>get_table_name(subregion_name[, ...])</code>	Get the default table name for a specific geographic (sub)region.
<code>import_osm_data(osm_data, table_name[, ...])</code>	Import OSM data into a database.
<code>import_osm_layer(layer_data, table_name, ...)</code>	Import one layer of OSM data into a table.
<code>import_subregion_osm_pbf(subregion_names[, ...])</code>	Import data of geographic (sub)region(s) that do not have (sub-)subregions into a database.
<code>subregion_table_exists(subregion_name, ...)</code>	Check if a table (for a geographic (sub)region) exists.

PostgresOSM.decode_pbf_layer

`PostgresOSM.decode_pbf_layer(layer_dat, decode_geojson=True)`

Process raw data of a PBF layer retrieved from database.

See also:

- Examples of the method `fetch_osm_data()`.

PostgresOSM.drop_subregion_tables

`PostgresOSM.drop_subregion_tables(subregion_names, schema_names=None, table_named_as_subregion=False, schema_named_as_layer=False, confirmation_required=True, verbose=False)`

Delete all or specific schemas/layers of subregion data from the database being connected.

Parameters

- **subregion_names** (`str` / `list`) – name of table for a subregion (or name of a subregion)
- **schema_names** (`str` / `list` / `None`) – names of schemas for each layer of the PBF data, if `None` (default), the default layer names as schema names

- **table_named_as_subregion** (*bool*) – whether to use subregion name as a table name, defaults to False
- **schema_named_as_layer** (*bool*) – whether a schema is named as a layer name, defaults to False
- **confirmation_required** (*bool*) – whether to ask for confirmation to proceed, defaults to True
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False

Examples:

```
>>> from pydriosm.ios import PostgresOSM
>>> from pyhelpers.dirs import delete_dir

>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.
```

Import example data into the database:

```
>>> dat_dir = "tests\osm_data" # Specify a temporary data directory

>>> # Import PBF data of 'Rutland' and 'Isle of Wight'
>>> subrgn_name_1 = ['Rutland', 'Isle of Wight']
>>> osmdb.import_subregion_osm_pbf(
...     subrgn_name_1, data_dir=dat_dir, expand=True, parse_geometry=True,
...     parse_properties=True, parse_other_tags=True, verbose=True)
To import .osm.pbf data of the following geographic (sub)region(s):
    "Rutland"
    "Isle of Wight"
into postgres:**@localhost:5432/osmdb_test
? [No] |Yes: yes
Downloading "rutland-latest.osm.pbf"
    to "tests\osm_data\rutland\" ... Done.
Reading "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
Importing the data into table "Rutland" ...
    "points" ... Done. (<total of rows> features)
    "lines" ... Done. (<total of rows> features)
    "multilinestrings" ... Done. (<total of rows> features)
    "multipolygons" ... Done. (<total of rows> features)
    "other_relations" ... Done. (<total of rows> features)
Downloading "isle-of-wight-latest.osm.pbf"
    to "tests\osm_data\isle-of-wight\" ... Done.
Reading "tests\osm_data\isle-of-wight\isle-of-wight-latest.osm.pbf" ... Done.
Importing the data into table "Isle of Wight" ...
    "points" ... Done. (<total of rows> features)
    "lines" ... Done. (<total of rows> features)
    "multilinestrings" ... Done. (<total of rows> features)
    "multipolygons" ... Done. (<total of rows> features)
    "other_relations" ... Done. (<total of rows> features)

>>> # Change the data source
>>> osmdb.data_source = 'BBBike'
>>> subrgn_name_2 = 'London'

>>> # An alternative way to import the shapefile data of 'London'
```

(continues on next page)

(continued from previous page)

```
>>> london_shp = osmdb.reader.read_shp_zip(
...     subrgn_name_2, data_dir=dat_dir, rm_extracts=True, download=True, verbose=True)
Downloading "London.osm.shp.zip"
    to "tests\osm_data\london\" ... Done.
Extracting "tests\osm_data\london\London.osm.shp.zip"
    to "tests\osm_data\london\" ... Done.
Reading the shapefile(s) at
    "tests\osm_data\london\London-shp\shape\" ... Done.
Deleting the extracts "tests\osm_data\london\London-shp\" ... Done.
>>> osmdb.import_osm_data(london_shp, table_name=subrgn_name_2, verbose=True)
To import data into table "London" at postgres:**@localhost:5432/osmdb_test
? [No]|Yes: yes
Importing the data ...
    "buildings" ... Done. (<total of rows> features)
    "landuse" ... Done. (<total of rows> features)
    "natural" ... Done. (<total of rows> features)
    "places" ... Done. (<total of rows> features)
    "points" ... Done. (<total of rows> features)
    "railways" ... Done. (<total of rows> features)
    "roads" ... Done. (<total of rows> features)
    "waterways" ... Done. (<total of rows> features)
```

Delete data of 'Rutland':

```
>>> subrgn_name = 'Rutland'

>>> # Delete data of Rutland under the schemas 'buildings' and 'landuse'
>>> lyr_name = ['buildings', 'landuse']
>>> osmdb.drop_subregion_tables(subrgn_name, lyr_name, verbose=True)
None of the data exists.

>>> # Delete 'points' layer data of Rutland
>>> lyr_name = 'points'
>>> osmdb.drop_subregion_tables(subrgn_name, lyr_name, verbose=True)
To drop table "points"."Rutland"
    from postgres:**@localhost:5432/osmdb_test
? [No]|Yes: yes
Dropping the table ...
    "points"."Rutland" ... Done.

>>> # Delete all available tables of Rutland
>>> osmdb.drop_subregion_tables(subrgn_name, verbose=True)
To drop table from postgres:**@localhost:5432/osmdb_test: "Rutland"
under the schemas:
    "lines"
    "multilinestrings"
    "multipolygons"
    "other_relations"
? [No]|Yes: yes
Dropping the tables ...
    "lines"."Rutland" ... Done.
    "multilinestrings"."Rutland" ... Done.
    "multipolygons"."Rutland" ... Done.
    "other_relations"."Rutland" ... Done.
```

Delete 'buildings' and 'points' data of London and Isle of Wight:

```
>>> # Delete 'buildings' and 'points' layers of London and Isle of Wight
```

(continues on next page)

(continued from previous page)

```
>>> subrgn_names = ['London', 'Isle of Wight']
>>> lyr_names = ['buildings', 'points']
>>> osmdb.drop_subregion_tables(subrgn_names, schema_names=lyr_names, verbose=True)
To drop tables from postgres:**@localhost:5432/osmdb_test:
    "Isle of Wight"
    "London"
under the schemas:
    "points"
    "buildings"
? [No]|Yes: yes
Dropping the tables ...
    "points"."Isle of Wight" ... Done.
    "points"."London" ... Done.
    "buildings"."London" ... Done.

>>> # Delete the rest of the data of London and Isle of Wight
>>> osmdb.drop_subregion_tables(subrgn_names, verbose=True)
To drop tables from postgres:**@localhost:5432/osmdb_test:
    "Isle of Wight"
    "London"
under the schemas:
    "railways"
    "landuse"
    "other_relations"
    "lines"
    "multilinestrings"
    "waterways"
    "roads"
    "multipolygons"
    "natural"
    "places"
? [No]|Yes: yes
Dropping the tables ...
    "railways"."London" ... Done.
    "landuse"."London" ... Done.
    "other_relations"."Isle of Wight" ... Done.
    "lines"."Isle of Wight" ... Done.
    "multilinestrings"."Isle of Wight" ... Done.
    "waterways"."London" ... Done.
    "roads"."London" ... Done.
    "multipolygons"."Isle of Wight" ... Done.
    "natural"."London" ... Done.
    "places"."London" ... Done.
```

Delete the test database and downloaded data files:

```
>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:**@localhost:5432
? [No]|Yes: yes
Dropping "osmdb_test" ... Done.

>>> # Delete the downloaded data files
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.
```

PostgresOSM.fetch_osm_data

```
PostgresOSM.fetch_osm_data(subregion_name, layer_names=None, chunk_size=None,
                           method='tempfile', max_size_spooled=1, decode_geojson=True,
                           sort_by='id', table_named_as_subregion=False,
                           schema_named_as_layer=False, verbose=False, **kwargs)
```

Fetch OSM data (of one or multiple layers) of a geographic (sub)region.

See also [ROP-1].

Parameters

- **subregion_name** (*str*) – name of a geographic (sub)region (or the corresponding table)
- **layer_names** (*list* / *None*) – names of schemas for each layer of the PBF data, if *None* (default), the default layer names as schema names
- **chunk_size** (*int* / *None*) – the number of rows in each batch to be written at a time, defaults to *None*
- **method** (*str* / *None*) – method to be used for buffering temporary data, defaults to 'tempfile'
- **max_size_spooled** (*int*, *float*) – see `pyhelpers.sql.PostgreSQL.read_sql_query()`, defaults to 1 (in GB)
- **decode_geojson** (*bool*) – whether to decode string GeoJSON data, defaults to *True*
- **sort_by** (*str* / *list*) – column name(s) by which the data (fetched from PostgreSQL) is sorted, defaults to 'id'
- **table_named_as_subregion** (*bool*) – whether to use subregion name as a table name, defaults to *False*
- **schema_named_as_layer** (*bool*) – whether a schema is named as a layer name, defaults to *False*
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to *False*

Returns

PBF (.osm.pbf) data

Return type

`dict` | `collections.OrderedDict`

Examples:

```
>>> from pydriosm.ios import PostgresOSM
>>> from pyhelpers.dirs import delete_dir

>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:***@localhost:5432/osmdb_test ... Successfully.
```

(continues on next page)

(continued from previous page)

```

>>> subrgn_name = 'Rutland' # name of a subregion
>>> dat_dir = "tests\osm_data" # name of a data directory where the subregion data is

>>> # Import PBF data of Rutland
>>> osmdb.import_subregion_osm_pbf(subrgn_name, data_dir=dat_dir, verbose=True)
To import .osm.pbf data of the following geographic (sub)region(s):
    "Rutland"
    into postgres:**@localhost:5432/osmdb_test
? [No]|Yes: yes
Downloading "rutland-latest.osm.pbf"
    to "tests\osm_data\rutland\" ... Done.
Reading "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
Importing the data into table "Rutland" ...
    "points" ... Done. (<total of rows> features)
    "lines" ... Done. (<total of rows> features)
    "multilinestrings" ... Done. (<total of rows> features)
    "multipolygons" ... Done. (<total of rows> features)
    "other_relations" ... Done. (<total of rows> features)

>>> # Import shapefile data of Rutland
>>> rutland_shp = osmdb.reader.read_shp_zip(
...     subrgn_name, data_dir=dat_dir, rm_extracts=True, verbose=True)
Downloading "rutland-latest-free.shp.zip"
    to "tests\osm_data\rutland\" ... Done.
Extracting "tests\osm_data\rutland\rutland-latest-free.shp.zip"
    to "tests\osm_data\rutland\rutland-latest-free-shp\" ... Done.
Reading the shapefile(s) at
    "tests\osm_data\rutland\rutland-latest-free-shp\" ... Done.
Deleting the extracts "tests\osm_data\rutland\rutland-latest-free-shp\" ... Done.
>>> osmdb.import_osm_data(rutland_shp, table_name=subrgn_name, verbose=True)
To import data into table "Rutland" at postgres:**@localhost:5432/osmdb_test
? [No]|Yes: yes
Importing the data ...
    "buildings" ... Done. (<total of rows> features)
    "landuse" ... Done. (<total of rows> features)
    "natural" ... Done. (<total of rows> features)
    "places" ... Done. (<total of rows> features)
    "pofw" ... Done. (<total of rows> features)
    "pois" ... Done. (<total of rows> features)
    "railways" ... Done. (<total of rows> features)
    "roads" ... Done. (<total of rows> features)
    "traffic" ... Done. (<total of rows> features)
    "transport" ... Done. (<total of rows> features)
    "water" ... Done. (<total of rows> features)
    "waterways" ... Done. (<total of rows> features)

>>> # Retrieve the data of specific layers
>>> lyr_names = ['points', 'multipolygons']
>>> rutland_data_ = osmdb.fetch_osm_data(subrgn_name, lyr_names, verbose=True)
Fetching the data of "Rutland" ...
    "points" ... Done.
    "multipolygons" ... Done.
>>> type(rutland_data_)
collections.OrderedDict
>>> list(rutland_data_.keys())
['points', 'multipolygons']

>>> # Data of the 'points' layer
>>> rutland_points = rutland_data_['points']

```

(continues on next page)

(continued from previous page)

```

>>> rutland_points.head()
          points
0  {'type': 'Feature', 'geometry': {'type': 'Poin...
1  {'type': 'Feature', 'geometry': {'type': 'Poin...
2  {'type': 'Feature', 'geometry': {'type': 'Poin...
3  {'type': 'Feature', 'geometry': {'type': 'Poin...
4  {'type': 'Feature', 'geometry': {'type': 'Poin...

>>> # Retrieve the data of all the layers from the database
>>> rutland_data = osmdb.fetch_osm_data(subrgn_name, layer_names=None, verbose=True)
Fetching the data of "Rutland" ...
    "points" ... Done.
    "lines" ... Done.
    "multilinestrings" ... Done.
    "multipolygons" ... Done.
    "other_relations" ... Done.
    "buildings" ... Done.
    "landuse" ... Done.
    "natural" ... Done.
    "places" ... Done.
    "pofw" ... Done.
    "pois" ... Done.
    "railways" ... Done.
    "roads" ... Done.
    "traffic" ... Done.
    "transport" ... Done.
    "water" ... Done.
    "waterways" ... Done.
>>> type(rutland_data)
collections.OrderedDict
>>> list(rutland_data.keys())
['points',
 'lines',
 'multilinestrings',
 'multipolygons',
 'other_relations',
 'buildings',
 'landuse',
 'natural',
 'places',
 'pofw',
 'pois',
 'railways',
 'roads',
 'traffic',
 'transport',
 'water',
 'waterways']

>>> # Data of the 'waterways' layer
>>> rutland_waterways = rutland_data['waterways']
>>> rutland_waterways.head()
   osm_id  code  ...           coordinates  shape_type
0  3701346  8102  ...  [(-0.7536654, 52.6495358), (-0.7536236, 52.649...
1  3701347  8102  ...  [(-0.7948821, 52.6569468), (-0.7946128, 52.656...
2  3707149  8103  ...  [(-0.7262381, 52.6790459), (-0.7258244, 52.680...
3  3707303  8102  ...  [(-0.7213277, 52.6765954), (-0.7206778, 52.676...
4  4470795  8101  ...  [(-0.4995349, 52.6418825), (-0.4984075, 52.642...
[5 rows x 7 columns]

```

Delete the test database and downloaded data files:

```
>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:***@localhost:5432
? [No]|Yes: yes
Dropping "osmdb_test" ... Done.

>>> # Delete the downloaded data files
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.
```

See also:

- More details of the above data can be found in the examples for the methods `import_osm_data()` and `import_subregion_osm_pbf()`.
- Similar examples about *fetching data from the database* are available in [Quick start](#).

PostgresOSM.get_table_column_info

`PostgresOSM.get_table_column_info(subregion_name, layer_name, as_dict=False, table_named_as_subregion=False, schema_named_as_layer=False)`

Get information about columns of a specific schema and table data of a geographic (sub)region.

Parameters

- `subregion_name` (`str`) – name of a geographic (sub)region, which acts as a table name
- `layer_name` (`str`) – name of an OSM layer (e.g. ‘points’, ‘railways’, …), which acts as a schema name
- `as_dict` (`bool`) – whether to return the column information as a dictionary, defaults to True
- `table_named_as_subregion` (`bool`) – whether to use subregion name as table name, defaults to False
- `schema_named_as_layer` (`bool`) – whether a schema is named as a layer name, defaults to False

Returns

information about each column of the given table

Return type

`pandas.DataFrame | dict`

Examples:

```
>>> from pydriosm.ios import PostgresOSM
```

(continues on next page)

(continued from previous page)

```
>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.

>>> subrgn_name = 'London'
>>> lyr_name = 'points'

>>> # Take for example a table named "points"."London"
>>> tbl_col_info = osmdb.get_table_column_info(subrgn_name, lyr_name)
>>> type(tbl_col_info)
pandas.core.frame.DataFrame
>>> tbl_col_info.index.to_list()[:5]
['table_catalog',
 'table_schema',
 'table_name',
 'column_name',
 'ordinal_position']

>>> # Another example of a table named "points"."Greater London"
>>> tbl_col_info_dict = osmdb.get_table_column_info(
...     subrgn_name, lyr_name, as_dict=True, table_named_as_subregion=True,
...     schema_named_as_layer=True)
>>> type(tbl_col_info_dict)
dict
>>> list(tbl_col_info_dict.keys())[:5]
['table_catalog',
 'table_schema',
 'table_name',
 'column_name',
 'ordinal_position']

>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:**@localhost:5432
? [No] | Yes: yes
Dropping "osmdb_test" ... Done.
```

PostgresOSM.get_table_name

`PostgresOSM.get_table_name(subregion_name, table_named_as_subregion=False)`

Get the default table name for a specific geographic (sub)region.

Parameters

- `subregion_name` (`str`) – name of a geographic (sub)region, which acts as a table name
- `table_named_as_subregion` (`bool`) – whether to use subregion name as table name, defaults to False

Returns

default table name for storing the subregion data into the database

Return type

`str`

Examples:

```
>>> from pydriosm.ios import PostgresOSM

>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.

>>> subrgn_name = 'london'

>>> tbl_name = osmdb.get_table_name(subrgn_name)
>>> tbl_name
'london'

>>> tbl_name = osmdb.get_table_name(subrgn_name, table_named_as_subregion=True)
>>> tbl_name
'Greater London'

>>> # Change the data source
>>> osmdb.data_source = 'BBBike'
>>> tbl_name = osmdb.get_table_name(subrgn_name, table_named_as_subregion=True)
>>> tbl_name
'London'

>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:**@localhost:5432
? [No]|Yes: yes
Dropping "osmdb_test" ... Done.
```

Note: In the examples above, the default data source is ‘Geofabrik’. Changing it to ‘BBBike’, the function may produce a different output for the same input, as a geographic (sub)region that is included in one data source may not always be available from the other.

PostgresOSM.import_osm_data

```
PostgresOSM.import_osm_data(osm_data, table_name, schema_names=None,
                           table_named_as_subregion=False, schema_named_as_layer=False,
                           if_exists='fail', force_replace=False, chunk_size=None,
                           confirmation_required=True, verbose=False, **kwargs)
```

Import OSM data into a database.

Parameters

- **osm_data** (*dict*) – OSM data of a geographic (sub)region
- **table_name** (*str*) – name of a table
- **schema_names** (*list* / *dict* / *None*) – names of schemas for each layer of the PBF data, defaults to *None*; when *schema_names=None*, the default layer names as schema names
- **table_named_as_subregion** (*bool*) – whether to use subregion name as a table name, defaults to *False*

- **schema_named_as_layer (bool)** – whether a schema is named as a layer name, defaults to False
- **if_exists (str)** – if the table already exists, defaults to 'fail'; valid options include {'replace', 'append', 'fail'}
- **force_replace (bool)** – whether to force to replace existing table, defaults to False
- **chunk_size (int / None)** – the number of rows in each batch to be written at a time, defaults to None
- **confirmation_required (bool)** – whether to prompt a message for confirmation to proceed, defaults to True
- **verbose (bool)** – whether to print relevant information in console as the function runs, defaults to False
- **kwarg**s – [optional] parameters of the method `import_osm_layer()`

Examples:

```
>>> from pydriosm.ios import PostgresOSM
>>> from pyhelpers.dirs import delete_dir

>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.

>>> subrgn_name = 'Rutland' # name of a subregion
>>> dat_dir = "tests\osm_data" # name of a data directory where the subregion data is
```

Example 1 - Import data of a PBF file:

```
>>> # First, read the PBF data of Rutland
>>> # (If the data file is not available, it'll be downloaded by confirmation)
>>> raw_rutland_pbf = osmdb.reader.read_osm_pbf(subrgn_name, dat_dir, verbose=True)
Downloading "rutland-latest.osm.pbf"
    to "tests\osm_data\rutland\" ... Done.
Reading "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
>>> type(raw_rutland_pbf)
dict
>>> list(raw_rutland_pbf.keys())
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']

>>> # Import all layers of the raw PBF data of Rutland
>>> osmdb.import_osm_data(raw_rutland_pbf, table_name=subrgn_name, verbose=True)
To import data into table "Rutland" at postgres:**@localhost:5432/osmdb_test
? [No] | Yes: yes
Importing the data ...
    "points" ... Done. (<total of rows> features)
    "lines" ... Done. (<total of rows> features)
    "multilinestrings" ... Done. (<total of rows> features)
    "multipolygons" ... Done. (<total of rows> features)
    "other_relations" ... Done. (<total of rows> features)

>>> # Get parsed PBF data
>>> parsed_rutland_pbf = osmdb.reader.read_osm_pbf(
...     subregion_name=subrgn_name, data_dir=dat_dir, expand=True, parse_geometry=True,
```

(continues on next page)

(continued from previous page)

```

...     parse_other_tags=True, verbose=True)
Parsing "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
>>> type(parsed_rutland_pbf)
dict
>>> list(parsed_rutland_pbf.keys())
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']

>>> # Import data of selected layers into specific schemas
>>> schemas = {
...     "schema_0": 'lines',
...     "schema_1": 'points',
...     "schema_2": 'multipolygons',
... }
>>> osmdb.import_osm_data(parsed_rutland_pbf, subrgn_name, schemas, verbose=True)
To import data into table "Rutland" at postgres:***@localhost:5432/osmdb_test
? [No]|Yes: yes
Importing the data ...
    "schema_0" ... Done. (<total of rows> features)
    "schema_1" ... Done. (<total of rows> features)
    "schema_2" ... Done. (<total of rows> features)

>>> # To drop the schemas "schema_0", "schema_1" and "schema_2"
>>> osmdb.drop_schema(schemas.keys(), confirmation_required=False, verbose=True)
Dropping the following schemas from postgres:***@localhost:5432/osmdb_test:
    "schema_0" ... Done.
    "schema_1" ... Done.
    "schema_2" ... Done.

```

Example 2 - Import data of a shapefile:

```

>>> # Read shapefile data of Rutland
>>> rutland_shp = osmdb.reader.read_shp_zip(
...     subregion_name=subrgn_name, data_dir=dat_dir, rm_extract=True, verbose=True)
Downloading "rutland-latest-free.shp.zip"
    to "tests\osm_data\rutland\" ... Done.
Extracting "tests\osm_data\rutland\rutland-latest-free.shp.zip"
    to "tests\osm_data\rutland\rutland-latest-free-shp\" ... Done.
Reading the shapefile(s) at
    "tests\osm_data\rutland\rutland-latest-free-shp\" ... Done.
Deleting the extracts "tests\osm_data\rutland\rutland-latest-free-shp\" ... Done.
>>> type(rutland_shp)
collections.OrderedDict
>>> list(rutland_shp.keys())
['buildings',
 'landuse',
 'natural',
 'places',
 'pofw',
 'pois',
 'railways',
 'roads',
 'traffic',
 'transport',
 'water',
 'waterways']

>>> # Import all layers of the shapefile data of Rutland
>>> osmdb.import_osm_data(osm_data=rutland_shp, table_name=subrgn_name, verbose=True)
To import data into table "Rutland" at postgres:***@localhost:5432/osmdb_test

```

(continues on next page)

(continued from previous page)

```
? [No] |Yes: yes
Importing the data ...
"buildings" ... Done. (<total of rows> features)
"landuse" ... Done. (<total of rows> features)
"natural" ... Done. (<total of rows> features)
"places" ... Done. (<total of rows> features)
"pofw" ... Done. (<total of rows> features)
"pois" ... Done. (<total of rows> features)
"railways" ... Done. (<total of rows> features)
"roads" ... Done. (<total of rows> features)
"traffic" ... Done. (<total of rows> features)
"transport" ... Done. (<total of rows> features)
"water" ... Done. (<total of rows> features)
"waterways" ... Done. (<total of rows> features)
```

Example 3 - Import BBBike shapefile data file of Leeds:

```
>>> # Change the data source
>>> osmdb.data_source = 'BBBike'
>>> subrgn_name = 'Leeds'

>>> # Read shapefile data of Leeds
>>> leeds_shp = osmdb.reader.read_shp_zip(
...     subregion_name=subrgn_name, data_dir=dat_dir, rm_extracts=True, verbose=True)
Downloading "Leeds.osm.shp.zip"
    to "tests\osm_data\leeds\" ... Done.
Extracting "tests\osm_data\leeds\Leeds.osm.shp.zip"
    to "tests\osm_data\leeds\" ... Done.
Reading the shapefile(s) at
    "tests\osm_data\leeds\Leeds-shp\shape\" ... Done.
Deleting the extracts "tests\osm_data\leeds\Leeds-shp\" ... Done.
>>> type(leeds_shp)
collections.OrderedDict
>>> list(leeds_shp.keys())
['buildings',
 'landuse',
 'natural',
 'places',
 'points',
 'railways',
 'roads',
 'waterways']

>>> # Import all layers of the shapefile data of Leeds
>>> osmdb.import_osm_data(osm_data=leeds_shp, table_name=subrgn_name, verbose=True)
To import data into table "Leeds" at postgres:***@localhost:5432/osmdb_test
? [No] |Yes: yes
Importing the data ...
"buildings" ... Done. (<total of rows> features)
"landuse" ... Done. (<total of rows> features)
"natural" ... Done. (<total of rows> features)
"places" ... Done. (<total of rows> features)
"points" ... Done. (<total of rows> features)
"railways" ... Done. (<total of rows> features)
"roads" ... Done. (<total of rows> features)
"waterways" ... Done. (<total of rows> features)
```

Delete the test database and downloaded data files:

```
>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:***@localhost:5432
? [No] |Yes: yes
Dropping "osmdb_test" ... Done.

>>> # Delete the downloaded data files
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No] |Yes: yes
Deleting "tests\osm_data\" ... Done.
```

PostgresOSM.import_osm_layer

```
PostgresOSM.import_osm_layer(layer_data, table_name, schema_name,
                             table_named_as_subregion=False,
                             schema_named_as_layer=False, if_exists='fail',
                             force_replace=False, chunk_size=None,
                             confirmation_required=True, verbose=False, **kwargs)
```

Import one layer of OSM data into a table.

Parameters

- **layer_data** (`pandas.DataFrame` / `geopandas.GeoDataFrame`) – one layer of OSM data
- **schema_name** (`str`) – name of a schema (or name of a PBF layer)
- **table_name** (`str`) – name of a table
- **table_named_as_subregion** (`bool`) – whether to use subregion name as a table name, defaults to False
- **schema_named_as_layer** (`bool`) – whether a schema is named as a layer name, defaults to False
- **if_exists** (`str`) – if the table already exists, defaults to 'fail'; valid options include {'replace', 'append', 'fail'}
- **force_replace** (`bool`) – whether to force to replace existing table, defaults to False
- **chunk_size** (`int` / `None`) – the number of rows in each batch to be written at a time, defaults to None
- **confirmation_required** (`bool`) – whether to prompt a message for confirmation to proceed, defaults to True
- **verbose** (`bool`) – whether to print relevant information in console as the function runs, defaults to False
- **kwargs** – [optional] parameters of `pyhelpers.sql.PostgreSQL.dump_data()`

Examples:

```
>>> from pydriosm.ios import PostgresOSM
>>> from pyhelpers.dirs import delete_dir

>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.

>>> subrgn_name = 'Rutland' # name of a subregion
>>> dat_dir = "tests\osm_data" # name of a data directory where the subregion data is
```

Example 1 - Import data of the ‘points’ layer of a PBF file:

```
>>> # First, read the PBF data of Rutland (from Geofabrik free download server)
>>> # (If the data file is not available, it'll be downloaded by confirmation)
>>> raw_pbf = osmdb.reader.read_osm_pbf(subrgn_name, data_dir=dat_dir, verbose=True)
Downloading "rutland-latest.osm.pbf"
    to "tests\osm_data\rutland\" ... Done.
Reading "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
>>> type(raw_pbf)
dict
>>> list(raw_pbf.keys())
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']

>>> # Get the data of 'points' layer
>>> points_key = 'points'
>>> raw_pbf_points = raw_pbf[points_key]
>>> type(raw_pbf_points)
list
>>> type(raw_pbf_points[0])
osgeo.ogr.Feature

>>> # Now import the data of 'points' into the PostgreSQL server
>>> osmdb.import_osm_layer(
...     layer_data=raw_pbf_points, table_name=subrgn_name, schema_name=points_key,
...     verbose=True)
To import data into "points"."Rutland" at postgres:**@localhost:5432/osmdb_test
? [No] | Yes: yes
Creating a schema: "points" ... Done.
Importing the data into the table "points"."Rutland" ... Done.

>>> tbl_col_info = osmdb.get_table_column_info(subrgn_name, points_key)
>>> tbl_col_info.head()
   column_0
table_catalog      osmdb_test
table_schema        points
table_name          Rutland
column_name         points
ordinal_position    1

>>> # Parse the 'geometry' of the PBF data of Rutland
>>> parsed_pbf = osmdb.reader.read_osm_pbf(
...     subregion_name=subrgn_name, data_dir=dat_dir, expand=True, parse_geometry=True)
>>> type(parsed_pbf)
dict
>>> list(parsed_pbf.keys())
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']
>>> parsed_pbf_points = parsed_pbf[points_key] # Get the parsed data of 'points' layer
>>> type(parsed_pbf_points)
pandas.core.series.Series
```

(continues on next page)

(continued from previous page)

```
>>> parsed_pbf_points.head()
   id ...                                properties
0 488432 ... {'osm_id': '488432', 'name': None, 'barrier': ...
1 488658 ... {'osm_id': '488658', 'name': 'Tickencote Inter...
2 13883868 ... {'osm_id': '13883868', 'name': None, 'barrier'...
3 14049101 ... {'osm_id': '14049101', 'name': None, 'barrier'...
4 14558402 ... {'osm_id': '14558402', 'name': None, 'barrier'...
[5 rows x 3 columns]

>>> # Import the parsed 'points' data into the PostgreSQL database
>>> osmdb.import_osm_layer(
...     layer_data=parsed_pbf_points, table_name=subrgn_name, schema_name=points_key,
...     verbose=True, if_exists='replace')
To import data into "points"."Rutland" at postgres:***@localhost:5432/osmdb_test
? [No] | Yes: yes
The table "points"."Rutland" already exists and is replaced.
Importing the data into the table "points"."Rutland" ... Done.

>>> # Get the information of the table "points"."Rutland"
>>> tbl_col_info = osmdb.get_table_column_info(subrgn_name, points_key)
>>> tbl_col_info.head()
   column_0    column_1    column_2
table_catalog    osmdb_test    osmdb_test    osmdb_test
table_schema      points      points      points
table_name        Rutland     Rutland     Rutland
column_name       id         geometry    properties
ordinal_position           1          2          3
```

Example 2 - Import data of the ‘railways’ layer of a shapefile:*

```
>>> # Read the data of 'railways' layer and delete the extracts
>>> lyr_name = 'railways'
>>> rutland_railways_shp = osmdb.reader.read_shp_zip(
...     subregion_name=subrgn_name, layer_names=lyr_name, data_dir=dat_dir,
...     rm_extracts=True, verbose=True)
Downloading "rutland-latest-free.shp.zip"
  to "tests\osm_data\rutland\" ... Done.
Extracting the following layer(s):
  'railways'
  from "tests\osm_data\rutland\rutland-latest-free.shp.zip"
  to "tests\osm_data\rutland\rutland-latest-free-shp\" ... Done.
Reading "tests\osm_data\rutland\rutland-latest-free-shp\gis_osm_railways_free_1.s...
Deleting the extracts "tests\osm_data\rutland\rutland-latest-free-shp\" ... Done.
>>> type(rutland_railways_shp)
collections.OrderedDict
>>> list(rutland_railways_shp.keys())
['railways']

>>> # Get the data of 'railways' layer
>>> rutland_railways_shp_ = rutland_railways_shp[lyr_name]
>>> rutland_railways_shp_.head()
   osm_id  code ...                                coordinates  shape_type
0  2162114  6101 ... [(-0.4528083, 52.6993402), (-0.4521571, 52.698...   3
1  3681043  6101 ... [(-0.6531215, 52.5730787), (-0.6531793, 52.572...   3
2  3693985  6101 ... [(-0.7323403, 52.6782102), (-0.7319059, 52.678...   3
3  3693986  6101 ... [(-0.6173072, 52.6132317), (-0.6241869, 52.614...   3
4  4806329  6101 ... [(-0.4576926, 52.7035194), (-0.4565358, 52.702...   3
[5 rows x 9 columns]
```

(continues on next page)

(continued from previous page)

```
>>> # Import the 'railways' data into the PostgreSQL database
>>> osmdb.import_osm_layer(
...     layer_data=rutland_railways_shp_, table_name=subrgn_name, schema_name=lyr_name,
...     verbose=True)
To import data into "railways"."Rutland" at postgres:***@localhost:5432/osmdb_test
? [No]|Yes: yes
Creating a schema: "railways" ... Done.
Importing the data into the table "railways"."Rutland" ... Done.

>>> # Get the information of the table "railways"."Rutland"
>>> tbl_col_info = osmdb.get_table_column_info(subrgn_name, lyr_name)
>>> tbl_col_info.head()
   column_0    column_1    ...    column_7    column_8
table_catalog  osmdb_test  osmdb_test  ...  osmdb_test  osmdb_test
table_schema    railways    railways    ...    railways    railways
table_name      Rutland    Rutland    ...    Rutland    Rutland
column_name      osm_id      code    ... coordinates  shape_type
ordinal_position        1        2    ...          8          9
[5 rows x 9 columns]
```

Delete the test database and downloaded data files:

```
>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:***@localhost:5432
? [No]|Yes: yes
Dropping "osmdb_test" ... Done.

>>> # Delete the downloaded data files
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.
```

PostgresOSM.import_subregion_osm_pbf

```
PostgresOSM.import_subregion_osm_pbf(subregion_names, data_dir=None,
                                         update_osm_pbf=False, if_exists='fail',
                                         chunk_size_limit=50, expand=False,
                                         parse_geometry=False, parse_properties=False,
                                         parse_other_tags=False, pickle_pbf_file=False,
                                         rm_pbf_file=False, confirmation_required=True,
                                         verbose=False, **kwargs)
```

Import data of geographic (sub)region(s) that do not have (sub-)subregions into a database.

Parameters

- **subregion_names** (*str* / *list* / *None*) – name(s) of geographic (sub)region(s)
- **data_dir** (*str* / *None*) – directory where the PBF data file is located/saved; if *None* (default), the default directory
- **update_osm_pbf** (*bool*) – whether to update .osm.pbf data file (if

available), defaults to False

- **if_exists (str)** – if the table already exists, defaults to 'fail'; valid options include {'replace', 'append', 'fail'}
- **chunk_size_limit (int)** – threshold (in MB) that triggers the use of chunk parser, defaults to 50; if the size of the .osm.pbf file (in MB) is greater than chunk_size_limit, it will be parsed in a chunk-wise way
- **expand (bool)** – whether to expand dict-like data into separate columns, defaults to False
- **parse_geometry (bool)** – whether to represent the 'geometry' field in a `shapely.geometry` format, defaults to False
- **parse_properties (bool)** – whether to represent the 'properties' field in a tabular format, defaults to False
- **parse_other_tags (bool)** – whether to represent a 'other_tags' (of 'properties') in a `dict` format, defaults to False
- **pickle_pbf_file (bool)** – whether to save the .pbf data as a .pickle file, defaults to False
- **rm_pbf_file (bool)** – whether to delete the downloaded .osm.pbf file, defaults to False
- **confirmation_required (bool)** – whether to ask for confirmation to proceed, defaults to True
- **verbose (bool / int)** – whether to print relevant information in console, defaults to False
- **kargs** – [optional] parameters of the method `_import_subregion_osm_pbf()` or `_import_subregion_osm_pbf_chunk_wisely()`

Examples:

```
>>> from pydriosm.ios import PostgresOSM
>>> from pyhelpers.dirs import cd, delete_dir
>>> from pyhelpers.store import load_pickle

>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:***@localhost:5432/osmdb_test ... Successfully.
```

Example 1 - Import PBF data of Rutland:

```
>>> subrgn_name = 'Rutland' # name of a subregion
>>> dat_dir = "tests\osm_data" # name of a data directory where the subregion data is

>>> osmdb.import_subregion_osm_pbf(subrgn_name, data_dir=dat_dir, verbose=True)
To import .osm.pbf data of the following geographic (sub)region(s):
    "Rutland"
into postgres:***@localhost:5432/osmdb_test
? [No] | Yes: yes
Downloading "rutland-latest.osm.pbf"
```

(continues on next page)

(continued from previous page)

```

to "tests\osm_data\rutland" ... Done.
Reading "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
Importing the data into table "Rutland" ...
    "points" ... Done. (<total of rows> features)
    "lines" ... Done. (<total of rows> features)
    "multilinestrings" ... Done. (<total of rows> features)
    "multipolygons" ... Done. (<total of rows> features)
    "other_relations" ... Done. (<total of rows> features)

```

Example 2 - Import PBF data of Leeds and London:

```

>>> # Change the data source
>>> osmdb.data_source = 'BBBike'
>>> subrgn_names = ['Leeds', 'London']

>>> # Note this may take a few minutes (or longer)
>>> osmdb.import_subregion_osm_pbf(
...     subregion_names=subrgn_names, data_dir=dat_dir, expand=True,
...     parse_geometry=True, parse_properties=True, parse_other_tags=True,
...     pickle_pbf_file=True, rm_pbf_file=True, verbose=True)
To import .osm.pbf data of the following geographic (sub)region(s):
    "Leeds"
    "London"
into postgres:***@localhost:5432/osmdb_test
? [No]|Yes: yes
Downloading "Leeds.osm.pbf"
    to "tests\osm_data\leeds\" ... Done.
Reading "tests\osm_data\leeds\Leeds.osm.pbf" ... Done.
Importing the data into table "Leeds" ...
    "points" ... Done. (82137 features)
    "lines" ... Done. (164411 features)
    "multilinestrings" ... Done. (390 features)
    "multipolygons" ... Done. (439144 features)
    "other_relations" ... Done. (6938 features)
Saving "Leeds-pbf.pickle" to "tests\osm_data\leeds\" ... Done.
Deleting "tests\osm_data\leeds\Leeds.osm.pbf" ... Done.
Downloading "London.osm.pbf"
    to "tests\osm_data\london\" ... Done.
Importing the data of "London" chunk-wisely
    into postgres:***@localhost:5432/osmdb_test ...
    "points" ... Done. (654517 features)
    "lines" ... Done. (769631 features)
    "multilinestrings" ... Done. (7241 features)
    "multipolygons" ... Done. (5432 features)
    "other_relations" ... Done. (21792 features)
Saving "London-pbf.pickle" to "tests\osm_data\london\" ... Done.
Deleting "tests\osm_data\london\London.osm.pbf" ... Done.

>>> # As `pickle_pbf_file=True`, the parsed PBF data have been saved as pickle files

>>> # Data of Leeds
>>> leeds_pbf = load_pickle(cd(dat_dir, "leeds", "Leeds-pbf.pickle"))
>>> type(leeds_pbf)
dict
>>> list(leeds_pbf.keys())
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']
>>> # Data of the 'points' layer of Leeds
>>> leeds_pbf_points = leeds_pbf['points']
>>> leeds_pbf_points.head()

```

(continues on next page)

(continued from previous page)

```

      id          geometry ... man_made      other_tags
0 154941  POINT (-1.5560511 53.6879848) ... None      None
1 154962    POINT (-1.34293 53.844618) ... None {'name:signed': 'no'}
2 155014    POINT (-1.517335 53.7499667) ... None {'name:signed': 'no'}
3 155023    POINT (-1.514124 53.7416937) ... None {'name:signed': 'no'}
4 155035    POINT (-1.516511 53.7256632) ... None {'name:signed': 'no'}
[5 rows x 11 columns]

>>> # Data of London
>>> london_pbf = load_pickle(cd(dat_dir, "london", "London-pbf.pickle"))
>>> type(london_pbf)
dict
>>> list(london_pbf.keys())
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']
>>> # Data of the 'points' layer of London
>>> london_pbf_points = london_pbf['points']
>>> london_pbf_points.head()
      id ...      other_tags
0 99878 ... {'access': 'permissive', 'bicycle': 'no', 'mot...
1 99880 ... {'crossing': 'unmarked', 'crossing:island': 'n...
2 99884 ... {'amenity': 'waste_basket'}
3 99918 ... {'emergency': 'life_ring'}
4 99939 ... {'traffic_signals:direction': 'forward'}
[5 rows x 11 columns]

```

Delete the test database and downloaded data files:

```

>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:***@localhost:5432
? [No]|Yes: yes
Dropping "osmdb_test" ... Done.

>>> # Delete the downloaded data files
>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No]|Yes: yes
Deleting "tests\osm_data\" ... Done.

```

PostgresOSM.subregion_table_exists

`PostgresOSM.subregion_table_exists(subregion_name, layer_name,
table_named_as_subregion=False,
schema_named_as_layer=False)`

Check if a table (for a geographic (sub)region) exists.

Parameters

- `subregion_name (str)` – name of a geographic (sub)region, which acts as a table name
- `layer_name (str)` – name of an OSM layer (e.g. ‘points’, ‘railways’, …), which acts as a schema name
- `table_named_as_subregion (bool)` – whether to use subregion name as table name, defaults to False

- **schema_named_as_layer (bool)** – whether a schema is named as a layer name, defaults to False

Returns

True if the table exists, False otherwise

Return type

bool

Examples:

```
>>> from pydriosm.ios import PostgresOSM

>>> osmdb = PostgresOSM(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.

>>> subrgn_name = 'London'
>>> lyr_name = 'pt'

>>> # Check whether the table "pt"."london" is available
>>> osmdb.subregion_table_exists(subregion_name=subrgn_name, layer_name=lyr_name)
False

>>> # Check whether the table "points"."greater_london" is available
>>> osmdb.subregion_table_exists(
...     subregion_name=subrgn_name, layer_name=lyr_name, table_named_as_subregion=True,
...     schema_named_as_layer=True)
False

>>> # Delete the database 'osmdb_test'
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:**@localhost:5432
? [No] | Yes: yes
Dropping "osmdb_test" ... Done.
```

3.3.2 Customised alternatives (Optional)

<code>GeofabrikIOS(**kwargs)</code>	Implement storage I/O of Geofabrik OpenStreetMap data extracts with PostgreSQL.
<code>BBBikeIOS(**kwargs)</code>	Implement storage I/O of BBBike exports of OpenStreetMap data with PostgreSQL.

GeofabrikIOS

`class pydriosm.ios.GeofabrikIOS(**kwargs)`

Implement storage I/O of Geofabrik OpenStreetMap data extracts with PostgreSQL.

Parameters

`kwargs` – [optional] parameters of the class PostgresOSM

Variables

- `postgres` (`PostgresOSM`) – instance of the class PostgresOSM

- **downloader** (*GeofabrikDownloader*) – instance of the class *GeofabrikDownloader*
- **reader** (*GeofabrikReader*) – instance of the class *GeofabrikReader*

Examples:

```
>>> from pydriosm.ios import GeofabrikiOS

>>> gfi = GeofabrikiOS(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.

>>> type(gfi.dbms)
pydriosm.ios.PostgresOSM

>>> gfi.dbms.name
'Geofabrik OpenStreetMap data extracts'
```

See also:

- Examples for all the methods of the class *PostgresOSM*.

BBBikeIOS

class pydriosm.ios.BBBikeIOS(**kwargs)

Implement storage I/O of BBBike exports of OpenStreetMap data with PostgreSQL.

Parameters

kwargs – [optional] parameters of the class *PostgresOSM*

Variables

- **downloader** (*BBBikeDownloader*) – instance of the class *BBBikeDownloader*
- **reader** (*BBBikeReader*) – instance of the class *BBBikeReader*

Examples:

```
>>> from pydriosm.ios import BBBikeIOS

>>> bbi = BBBikeIOS(database_name='osmdb_test')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:**@localhost:5432/osmdb_test ... Successfully.

>>> type(bbi.dbms)
pydriosm.ios.PostgresOSM

>>> bbi.dbms.name
'BBBike exports of OpenStreetMap data'
```

See also:

- Examples for all the methods of the class *PostgresOSM*.

3.3.3 Other utilities

<code>get_default_layer_name(schema_name)</code>	Get default name (as an input schema name) of an OSM layer for the class <code>PostgresOSM</code> .
<code>validate_schema_names([schema_names, ...])</code>	Validate schema names for importing data into a <code>PostgreSQL</code> database.
<code>validate_table_name(table_name[, sub_space])</code>	Validate a table name for importing OSM data into a <code>PostgreSQL</code> database.

get_default_layer_name

`pydriosm.ios.get_default_layer_name(schema_name)`

Get default name (as an input schema name) of an OSM layer for the class `PostgresOSM`.

See, for example, the method `pydriosm.ios.PostgresOSM.import_osm_layer()`.

Parameters

`schema_name (str)` – name of a schema (or name of an OSM layer)

Returns

default name of the layer

Return type

str

Examples:

```
>>> from pydriosm.ios import get_default_layer_name

>>> lyr_name = get_default_layer_name(schema_name='point')
>>> lyr_name
'points'

>>> lyr_name = get_default_layer_name(schema_name='land')
>>> lyr_name
'landuse'
```

validate_schema_names

`pydriosm.ios.validate_schema_names(schema_names=None, schema_named_as_layer=False)`

Validate schema names for importing data into a `PostgreSQL` database.

Parameters

- `schema_names (Iterable / None)` – one or multiple names of layers, e.g. ‘points’, ‘lines’, defaults to None
- `schema_named_as_layer (bool)` – whether to use default PBF layer name as the schema name, defaults to False

Returns

valid names of the schemas in the database

Return type

list

Examples:

```
>>> from pydriosm.ios import validate_schema_names

>>> valid_names = validate_schema_names()
>>> valid_names
[]

>>> input_schema_names = ['point', 'polygon']
>>> valid_names = validate_schema_names(input_schema_names)
>>> valid_names
['point', 'polygon']

>>> valid_names = validate_schema_names(input_schema_names, schema_named_as_layer=True)
>>> valid_names
['points', 'multipolygons']
```

validate_table_name

`pydriosm.ios.validate_table_name(table_name, sub_space='')`

Validate a table name for importing OSM data into a PostgreSQL database.

Parameters

- **table_name** (*str*) – name as input of a table in a PostgreSQL database
- **sub_space** (*str*) – substitute for space, defaults to ''

Returns

valid name of the table in the database

Return type

str

Examples:

```
>>> from pydriosm.ios import validate_table_name

>>> subrgn_name = 'greater london'
>>> valid_table_name = validate_table_name(subrgn_name)
>>> valid_table_name
'greater london'

>>> subrgn_name = 'Llanfairpwllgwyngyllgogerychwyrndrobwllllantysiliogogogoch, Wales'
>>> valid_table_name = validate_table_name(subrgn_name, sub_space='_')
>>> valid_table_name
'Llanfairpwllgwyngyllgogerychwyrndrobwllllantysiliogogogoch_W..'
```

3.4 errors

Define custom errors/exceptions.

3.4.1 Validation errors

<i>InvalidSubregionNameError</i> (subregion_name[, msg])	Exception raised when an input <i>subregion_name</i> is not recognizable.
<i>InvalidFileFormatError</i> (osm_file_format[, ...])	Exception raised when an input <i>osm_file_format</i> is not recognizable.

InvalidSubregionNameError

```
class pydriosm.errors.InvalidSubregionNameError(subregion_name, msg=None)
```

Exception raised when an input *subregion_name* is not recognizable.

Parameters

- **subregion_name** (*str*) – name of a (sub)region available on a free download server
- **msg** (*int* / *None*) – index of optional messages, defaults to *None*; options include {1, 2}

Ivar

str *subregion_name*: name of a (sub)region available on a free download server

Ivar

int | *None* *msg*: index of optional messages; options include {1, 2}

Ivar

str: error message

Examples:

```
>>> from pydriosm.errors import InvalidSubregionNameError

>>> raise InvalidSubregionNameError(subregion_name='abc')
Traceback (most recent call last):
...
pydriosm.errors.InvalidSubregionNameError:
`subregion_name='abc'` -> The input of `subregion_name` is not recognizable.
Check the `data_source`, or try another one instead.

>>> from pydriosm.downloader import GeofabrikDownloader, BBBikeDownloader

>>> gfd = GeofabrikDownloader()
>>> gfd.validate_subregion_name(subregion_name='birmingham')
Traceback (most recent call last):
...
pydriosm.errors.InvalidSubregionNameError:
`subregion_name='birmingham'`
1) `subregion_name` fails to match any in `<downloader>.valid_subregion_names`; or
2) The queried (sub)region is not available on the free download server.
```

(continues on next page)

(continued from previous page)

```
>>> bbd = BBBikeDownloader()
>>> bbd.validate_subregion_name(subregion_name='bham')
Traceback (most recent call last):
...
pydriosm.errors.InvalidSubregionNameError:
`subregion_name='bham'` -> The input of `subregion_name` is not recognizable.
Check the `data_source`, or try another one instead.
```

InvalidFileFormatError

`class pydriosm.errors.InvalidFileFormatError(osm_file_format, valid_file_formats=None)`
Exception raised when an input `osm_file_format` is not recognizable.

Parameters

- `osm_file_format (str)` – file format/extension of the OSM data on the free download server
- `valid_file_formats (Iterable / None)` – filename extensions of the data files available on the free download server, defaults to None

Ivar

`str osm_file_format:` file format/extension of the OSM data available on the free download server

Ivar

`int | None message:` error message

Examples:

```
>>> from pydriosm.errors import InvalidFileFormatError

>>> raise InvalidFileFormatError(osm_file_format='abc')
Traceback (most recent call last):
...
pydriosm.errors.InvalidFileFormatError:
`osm_file_format='abc'` -> The input `osm_file_format` is unidentifiable.

>>> from pydriosm.downloader import GeofabrikDownloader, BBBikeDownloader

>>> gfd = GeofabrikDownloader()
>>> gfd.validate_file_format(osm_file_format='abc')
Traceback (most recent call last):
...
pydriosm.errors.InvalidFileFormatError:
`osm_file_format='abc'` -> The input `osm_file_format` is unidentifiable.
Valid options include: {'shp.zip', 'osm.pbf', 'osm.bz2'}.

>>> bbd = BBBikeDownloader()
>>> bbd.validate_file_format(osm_file_format='abc')
Traceback (most recent call last):
...
pydriosm.errors.InvalidFileFormatError:
`osm_file_format='abc'` -> The input `osm_file_format` is unidentifiable.
Valid options include: {'shp.zip', 'geojson.xz', 'mapsforge-osm.zip', 'pbf', ...}
```

3.4.2 Parse errors

<code>OtherTagsReformatError(other_tags)</code>	Exception raised when errors occur in the process of parsing <code>other_tags</code> in a PBF data file.
---	--

OtherTagsReformatError

```
class pydriosm.errors.OtherTagsReformatError(other_tags)
```

Exception raised when errors occur in the process of parsing `other_tags` in a PBF data file.

Parameters

- `other_tags (str / None)` – data of '`other_tags`' of a single feature in a PBF data file

Variables

- `other_tags (str / None)` – data of '`other_tags`' of a single feature in a PBF data file
- `message (str)` – error message

Examples:

```
>>> from pydriosm.errors import OtherTagsReformatError

>>> raise OtherTagsReformatError(other_tags='abc')
Traceback (most recent call last):
...
pydriosm.errors.OtherTagsReformatError:
`other_tags='abc'` -> Failed to reformat the ...
```

3.5 utils

Provide various helper functions for use across the package.

3.5.1 Data directories

<code>cdd_geofabrik(*sub_dir[, mkdir, default_dir])</code>	Change directory to <code>osm_geofabrik\</code> and its subdirectories within a package.
<code>cdd_bbbike(*sub_dir[, mkdir, default_dir])</code>	Change directory to <code>osm_bbbike\</code> and its subdirectories.

cdd_geofabrik

`pydriosm.utils.cdd_geofabrik(*sub_dir, mkdir=False, default_dir='osm_geofabrik', **kwargs)`

Change directory to `osm_geofabrik\` and its subdirectories within a package.

Parameters

- `sub_dir (str / os.PathLike)` – name of directory; names of directories (and/or a filename)
- `mkdir (bool)` – whether to create a directory, defaults to False
- `default_dir (str)` – default folder name of the root directory for downloading data from Geofabrik, defaults to "osm_geofabrik"
- `kwargs` – [optional] parameters of `pyhelpers.dir.cd()`

Returns

an absolute path to a directory (or a file) under `data_dir`

Return type

`str | os.PathLike`

Examples:

```
>>> from pydriosm.utils import cdd_geofabrik
>>> import os

>>> os.path.relpath(cdd_geofabrik())
'osm_geofabrik'
```

cdd_bbbike

`pydriosm.utils.cdd_bbbike(*sub_dir, mkdir=False, default_dir='osm_bbbike', **kwargs)`

Change directory to `osm_bbbike\` and its subdirectories.

Parameters

- `sub_dir (str)` – name of directory; names of directories (and/or a filename)
- `mkdir (bool)` – whether to create a directory, defaults to False
- `default_dir (str)` – default folder name of the root directory for downloading data from BBBike, defaults to "osm_bbbike"
- `kwargs` – [optional] parameters of `pyhelpers.dir.cd()`

Returns

an absolute path to a directory (or a file) under `data_dir`

Return type

`str`

Examples:

```
>>> from pydriosm.utils import cdd_bbbike
>>> import os
```

(continues on next page)

(continued from previous page)

```
>>> os.path.relpath(cdd_bbbike())
'osm_bbbike'
```

3.5.2 General utilities

<code>first_unique(iterable)</code>	Return unique items in an input iterable variable given the same order of presence.
<code>check_json_engine([engine])</code>	Check an available module used for loading JSON data.
<code>remove_osm_file(path_to_file[, verbose])</code>	Remove a downloaded OSM data file.

first_unique

`pydriosm.utils.first_unique(iterable)`

Return unique items in an input iterable variable given the same order of presence.

Parameters

`iterable (Iterable)` – iterable variable

Returns

unique items in the same order of presence as in the input

Return type

`Generator[list]`

Examples:

```
>>> from pydriosm.utils import first_unique

>>> list_example1 = [1, 2, 2, 3, 4, 5, 6, 6, 2, 3, 1, 6]
>>> list(first_unique(list_example1))
[1, 2, 3, 4, 5, 6]

>>> list_example2 = [6, 1, 2, 2, 3, 4, 5, 6, 6, 2, 3, 1]
>>> list(first_unique(list_example2))
[6, 1, 2, 3, 4, 5]
```

check_json_engine

`pydriosm.utils.check_json_engine(engine=None)`

Check an available module used for loading JSON data.

Parameters

`engine (str / None)` – name of a module for loading JSON data; when `engine=None` (default), use the built-in `json` module;

Returns

the module for loading JSON data

Type

`types.ModuleType | None`

Examples:

```
>>> from pydriosm.utils import check_json_engine
>>> import types

>>> result = check_json_engine()

>>> isinstance(result, types.ModuleType)
True
>>> result.__name__ == 'json'
True
```

remove_osm_file

`pydriosm.utils.remove_osm_file(path_to_file, verbose=True)`

Remove a downloaded OSM data file.

Parameters

- `path_to_file (str)` – absolute path to a downloaded OSM data file
- `verbose (bool)` – defaults to True

Examples:

```
>>> from pydriosm.utils import remove_osm_file
>>> from pyhelpers.dirs import cd
>>> import os

>>> path_to_pseudo_pbf_file = cd('tests\\pseudo.osm.pbf')
>>> try:
...     open(path_to_pseudo_pbf_file, 'a').close()
... except OSError:
...     print('Failed to create the file.')
... else:
...     print('File created successfully.')
File created successfully.

>>> os.path.exists(path_to_pseudo_pbf_file)
True

>>> remove_osm_file(path_to_pseudo_pbf_file, verbose=True)
Deleting "tests\\pseudo.osm.pbf" ... Done.

>>> os.path.exists(path_to_pseudo_pbf_file)
False
```

Chapter 4

License

- **PyDriosm**

- PyDriosm is licensed under [GNU General Public License v3.0](#) or later (GPLv3+).

- **OpenStreetMap data**

- The free [OpenStreetMap](#) data, which is used for the development of PyDriosm, is licensed under the [Open Data Commons Open Database License \(ODbL\)](#) by the [OpenStreetMap Foundation \(OSMF\)](#).
 - For more details about the use of the OpenStreetMap data, refer to the web page of [Copyright and Licence](#).

Chapter 5

Acknowledgement

The development of `pydriosm`, including the example code that demonstrates how to use the package, heavily relies on freely available [OpenStreetMap](#) data. The author would like to express sincere gratitude to all the [OpenStreetMap contributors](#) for their invaluable contributions in making this data accessible to the community.

Chapter 6

Contributors

- Qian Fu

Chapter 7

Quick start

For a demonstration of how PyDriosm works with OpenStreetMap (OSM) data, this section of the documentation provides a quick guide with practical examples. It showcases the usage of the package for tasks such as downloading, parsing, and storage I/O of OSM data.

(Also check out [GitHub](#) and [Documentation](#).)

Note:

- All the data used in this quick-start tutorial will be downloaded and saved to a directory named “`tests\osm_data\`” (which will be created if it does not exist) at the current working directory.
 - At the end of the tutorial, you will be asked to confirm whether you would like to retain or remove the directory (i.e. “`tests\osm_data\`”). If *yes*, all the downloaded data and those generated during the tutorial will be deleted permanently.
-

7.1 Download data

The current release of the package works for the (sub)region-based OSM data extracts, which are available from the free download servers: [Geofabrik](#) and [BBBike](#). To start with, let’s use the class `GeofabrikDownloader` from the module `downloader` to download a data file from the [Geofabrik](#) free download server.

```
>>> from pydriosm.downloader import GeofabrikDownloader
>>> # from pydriosm import GeofabrikDownloader

>>> # Create an instance for downloading the Geofabrik free data extracts
>>> gfd = GeofabrikDownloader()

>>> gfd.LONG_NAME # Name of the data
'Geofabrik OpenStreetMap data extracts'

>>> gfd.FILE_FORMATS # Available file formats
{'.osm.bz2', '.osm.pbf', '.shp.zip'}
```

To explore what data is available for download, you may check a download catalogue by using the method `GeofabrikDownloader.get_catalogue()`:

```
>>> # A download catalogue for all subregions
>>> geofabrik_download_catalogue = gfd.get_catalogue()
>>> geofabrik_download_catalogue.head()
   subregion ... .osm.bz2
0      Africa ... https://download.geofabrik.de/africa-latest.os...
1  Antarctica ... https://download.geofabrik.de/antarctica-lates...
2       Asia ... https://download.geofabrik.de/asia-latest.osm.bz2
3 Australia and Oceania ... https://download.geofabrik.de/australia-ocean...
4 Central America ... https://download.geofabrik.de/central-america-...

[5 rows x 6 columns]
```

If we would like to download a **protocolbuffer binary format** (PBF) data file of a specific geographic region, we need to specify the name of the (sub)region and the file format (i.e. ".pbf" or ".osm.pbf"). For example, let's try to download the PBF data of 'London' and save it to a directory "tests\\osm_data":

```
>>> subrgn_name = 'London' # Name of a (sub)region; case-insensitive
>>> file_format = ".pbf" # OSM data file format
>>> dwnld_dir = "tests\\osm_data" # Name of or path to a directory where the data is saved

>>> # Download the OSM PBF data of London from Geofabrik download server
>>> gfd.download_osm_data(
...     subregion_names=subrgn_name, osm_file_format=file_format, download_dir=dwnld_dir,
...     verbose=True)
To download .osm.pbf data of the following geographic (sub)region(s):
    Greater London
? [No] | Yes: yes
Downloading "greater-london-latest.osm.pbf"
    to "tests\osm_data\greater-london\" ... Done.
```

Since the data has been successfully downloaded, it will not be downloaded again if you run the method given the same arguments:

```
>>> gfd.download_osm_data(
...     subregion_names=subrgn_name, osm_file_format=file_format, download_dir=dwnld_dir,
...     verbose=True)
"greater-london-latest.osm.pbf" is already available
    at "tests\osm_data\greater-london\".
```

Note:

- If the data file does not exist at the specified directory, we would need to confirm whether to proceed to download it as, by default, confirmation_required=True. To skip the confirmation requirement, we could set confirmation_required=False.
- The parameter download_dir is by default None, in which case the downloaded data file is saved to the default data directory. For example, the default directory for in the case above should be "geofabrik\\europe\\great-britain\\england\\greater-london\\".
- After the downloading process completes, we can find the downloaded data file at "tests\\osm_data\\\" and the (default) filename is **greater-london-latest.osm.pbf**.
- The parameter update is by default False. When the data file already exists at the specified or default download directory and we set update=True, the method would replace the existing file with a freshly downloaded one.

If we would also like to have the path to the downloaded file, we could set `ret_download_path=True`. See the example below:

```
>>> path_to_london_pbf = gfd.download_osm_data(
...     subregion_names=subrgn_name, osm_file_format=file_format, download_dir=dwnld_dir,
...     update=True, verbose=2, ret_download_path=True)
"greater-london-latest.osm.pbf" is already available
    at "tests\osm_data\greater-london\".
To update the .osm.pbf data of the following geographic (sub)region(s):
    Greater London
? [No] | Yes: yes
Updating "greater-london-latest.osm.pbf"
    at "tests\osm_data\greater-london\" ...
"tests\osm_data\greater-london\greater-london-latest.osm.pbf": 82.9MB [00:01, 52.8MB/s]
Done.
```

In the example above, `update=True` allowed us to download the PBF data file again and replace the existing one. In addition, we also set `verbose=2`, which requires `tqdm`, to print more details about the downloading process.

Now let's check the file path and the filename of the downloaded data:

```
>>> import os

>>> path_to_london_pbf_ = path_to_london_pbf[0]

>>> # Relative file path:
>>> print(f'Current (relative) file path: "{os.path.relpath(path_to_london_pbf_)}"')
Current (relative) file path: "tests\osm_data\greater-london\greater-london-latest.osm.pbf"

>>> # Default filename:
>>> london_pbf_filename = os.path.basename(path_to_london_pbf_)
>>> print(f'Default filename: "{london_pbf_filename}"')
Default filename: "greater-london-latest.osm.pbf"
```

Alternatively, you could also make use of the method `.get_default.pathname()` to get the default path to the data file (even when it does not exist):

We could also make use of the method `get_default.pathname()` to directly get the information (even if the file does not exist):

```
>>> download_info = gfd.get_valid_download_info(subrgn_name, file_format, dwnld_dir)
>>> subrgn_name_, london_pbf_filename, london_pbf_url, london_pbf_pathname = download_info
>>> print(f'Current (relative) file path: "{os.path.relpath(london_pbf_pathname)}"')
Current (relative) file path: "tests\osm_data\greater-london\greater-london-latest.osm.pbf"

>>> print(f'Default filename: "{london_pbf_filename}"')
Default filename: "greater-london-latest.osm.pbf"
```

In addition, we can also download the data of multiple (sub)regions at one go. For example, let's now download the PBF data of both 'West Yorkshire' and 'West Midlands', and return their file paths:

```
>>> subrgn_names = ['West Yorkshire', 'West Midlands']
>>> paths_to_pbf = gfd.download_osm_data(
...     subregion_names=subrgn_names, osm_file_format=file_format, download_dir=dwnld_dir,
```

(continues on next page)

(continued from previous page)

```
...     verbose=True, ret_download_path=True)
To download .osm.pbf data of the following geographic (sub)region(s):
    West Yorkshire
    West Midlands
? [No] | Yes: yes
Downloading "west-yorkshire-latest.osm.pbf"
    to "tests\osm_data\west-yorkshire\" ... Done.
Downloading "west-midlands-latest.osm.pbf"
    to "tests\osm_data\west-midlands\" ... Done.
```

Check the pathnames of the data files:

```
>>> for path_to_pbf in paths_to_pbf:
...     print(f"\'{os.path.relpath(path_to_pbf)}\'")
"tests\osm_data\west-yorkshire\west-yorkshire-latest.osm.pbf"
"tests\osm_data\west-midlands\west-midlands-latest.osm.pbf"
```

7.2 Read/parse data

To read/parse any of the downloaded data files above, we can use the class `PBFRReadParse` or `GeofabrikReader`, which requires the python package `GDAL`.

7.2.1 PBF data (.pbf / .osm.pbf)

Now, let's try to use the method `GeofabrikReader.read_osm_pbf()` to read the PBF data of the subregion 'Rutland':

```
>>> from pydriosm.reader import GeofabrikReader # from pydriosm import GeofabrikReader

>>> # Create an instance for reading the downloaded Geofabrik data extracts
>>> gfr = GeofabrikReader()

>>> subrgn_name = 'Rutland'
>>> dat_dir = dwnld_dir # i.e. "tests\\osm_data"

>>> rutland_pbf_raw = gfr.read_osm_pbf(
...     subregion_name=subrgn_name, data_dir=dat_dir, verbose=True)
Downloading "rutland-latest.osm.pbf"
    to "tests\osm_data\rutland\" ... Done.
Reading "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
```

Check the data types:

```
>>> raw_data_type = type(rutland_pbf_raw)
>>> print(f'Data type of `rutland_pbf_parsed`:\n\t{raw_data_type}')
Data type of `rutland_pbf_parsed`:
<class 'dict'>

>>> raw_data_keys = list(rutland_pbf_raw.keys())
>>> print(f'The "keys" of `rutland_pbf_parsed`:\n\t{raw_data_keys}')
The "keys" of `rutland_pbf_parsed`:
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']
```

(continues on next page)

(continued from previous page)

```
>>> raw_layer_data_type = type(rutland_pbf_raw['points'])
>>> print(f'Data type of the corresponding layer:\n\t{raw_layer_data_type}')
Data type of the corresponding layer:
<class 'list'>

>>> raw_value_type = type(rutland_pbf_raw['points'][0])
>>> print(f'Data type of the individual feature:\n\t{raw_value_type}')
Data type of the individual feature:
<class 'osgeo.ogr.Feature'>
```

As we see from the above, the variable `rutland_pbf_raw` is in `dict` type. It has five keys: '`points`', '`lines`', '`multilinestrings`', '`multipolygons`' and '`other_relations`', each of which corresponds to the name of a layer of the PBF data.

However, the raw data is not human-readable. We can set `readable=True` to parse the individual features using [GDAL](#).

Note:

- The method `GeofabrikReader.read_osm_pbf()`, which relies on [GDAL](#), may take tens of minutes (or even much longer) to parse a PBF data file, depending on the size of the data file.
- If the size of a data file is greater than the specified `chunk_size_limit` (which defaults to 50 MB), the data will be parsed in a chunk-wise manner.

```
>>> # Set `readable=True`
>>> rutland_pbf_parsed_0 = gfr.read_osm_pbf(
...     subregion_name=subrgn_name, data_dir=dat_dir, readable=True, verbose=True)
Parsing "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
```

Check the data types:

```
>>> parsed_data_type = type(rutland_pbf_parsed_0)
>>> print(f'Data type of `rutland_pbf_parsed`:\n\t{parsed_data_type}')
Data type of `rutland_pbf_parsed`:
<class 'dict'>

>>> parsed_data_keys = list(rutland_pbf_parsed_0.keys())
>>> print(f'The "keys" of `rutland_pbf_parsed`:\n\t{parsed_data_keys}')
The "keys" of `rutland_pbf_parsed`:
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']

>>> parsed_layer_type = type(rutland_pbf_parsed_0['points'])
>>> print(f'Data type of the corresponding layer:\n\t{parsed_layer_type}')
Data type of the corresponding layer:
<class 'pandas.core.series.Series'>
```

Let's further check out the '`points`' layer as an example:

```
>>> rutland_pbf_points_0 = rutland_pbf_parsed_0['points'] # The layer of 'points'
>>> rutland_pbf_points_0.head()
0    {'type': 'Feature', 'geometry': {'type': 'Poin...
1    {'type': 'Feature', 'geometry': {'type': 'Poin...
2    {'type': 'Feature', 'geometry': {'type': 'Poin...
3    {'type': 'Feature', 'geometry': {'type': 'Poin...
```

(continues on next page)

(continued from previous page)

```


4     {'type': 'Feature', 'geometry': {'type': 'Poin...
Name: points, dtype: object

>>> rutland_pbf_points_0_0 = rutland_pbf_points_0[0] # A feature of the 'points' layer
>>> rutland_pbf_points_0_0
{'type': 'Feature',
 'geometry': {'type': 'Point', 'coordinates': [-0.5134241, 52.6555853]},
 'properties': {'osm_id': '488432',
 'name': None,
 'barrier': None,
 'highway': None,
 'ref': None,
 'address': None,
 'is_in': None,
 'place': None,
 'man_made': None,
 'other_tags': {"odbl":>"clean"}},
 'id': 488432}

```

Each row (i.e. feature) of `rutland_pbf_points_0` is [GeoJSON](#) data, which is a nested dictionary.

The charts ([Fig. 1](#) - [Fig. 5](#)) below illustrate the different geometry types and structures (i.e. all keys within the corresponding [GeoJSON](#) data) for each layer:

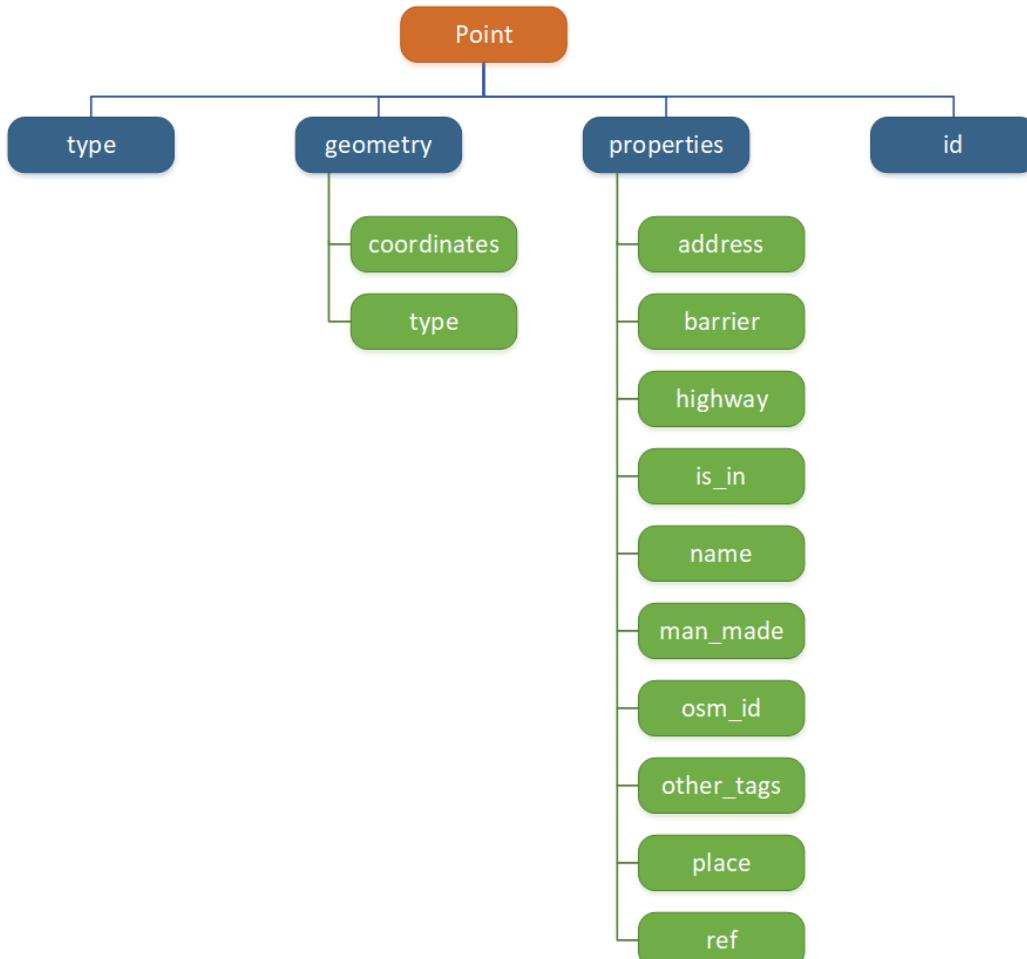

[Fig. 1](#): Type of the geometry object and keys within the nested dictionary of 'points'.

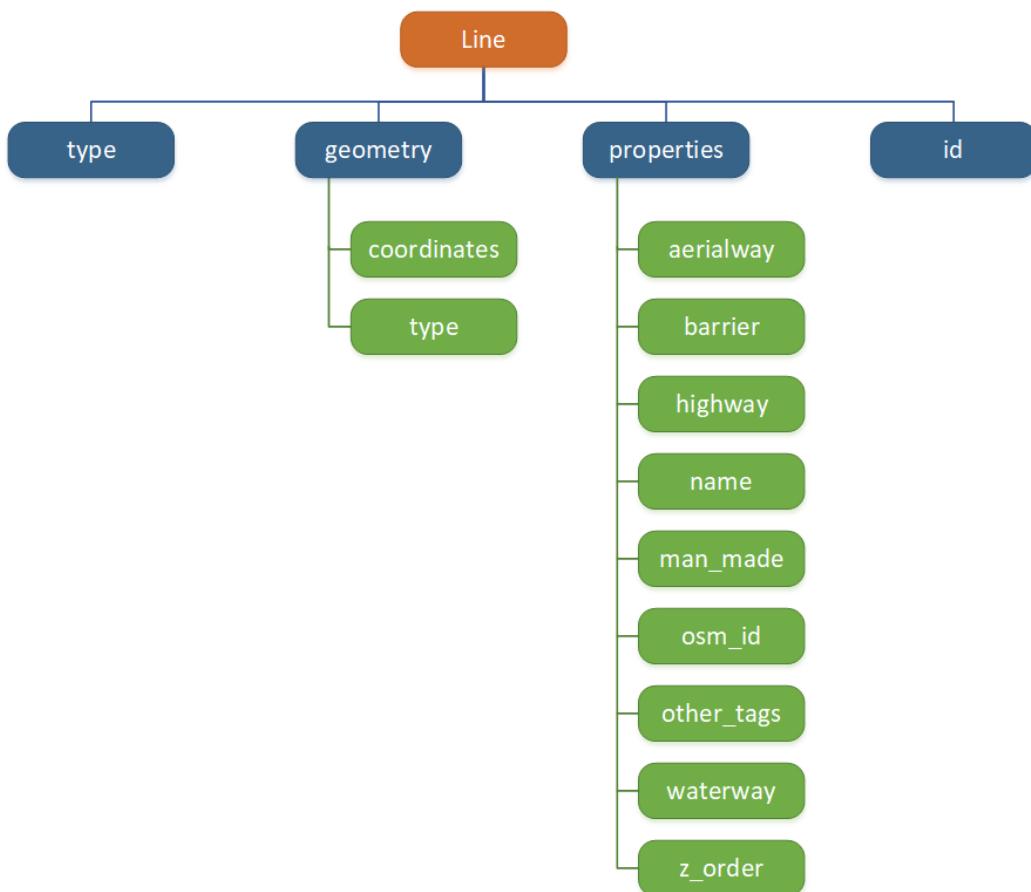


Fig. 2: Type of the geometry object and keys within the nested dictionary of 'lines'.

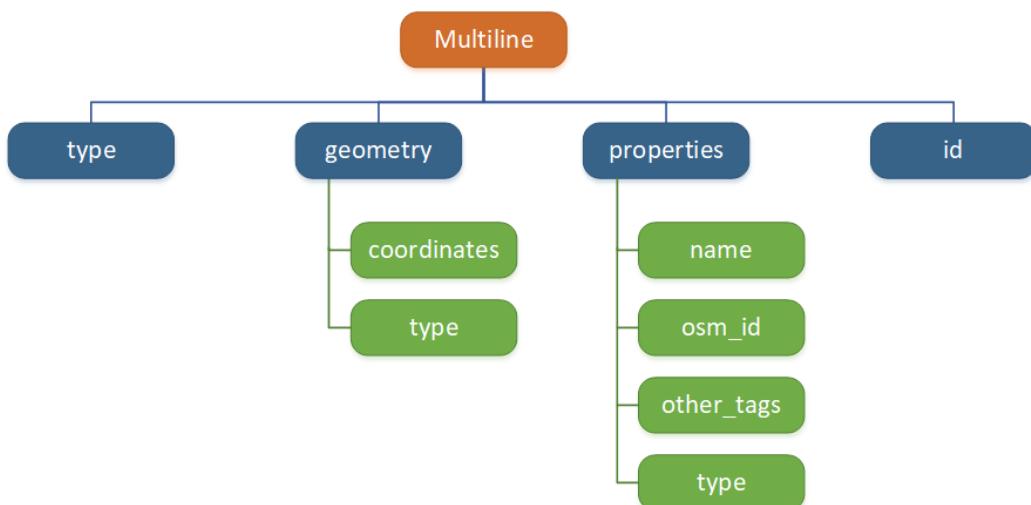


Fig. 3: Type of the geometry object and keys within the nested dictionary of 'multilinestrings'.

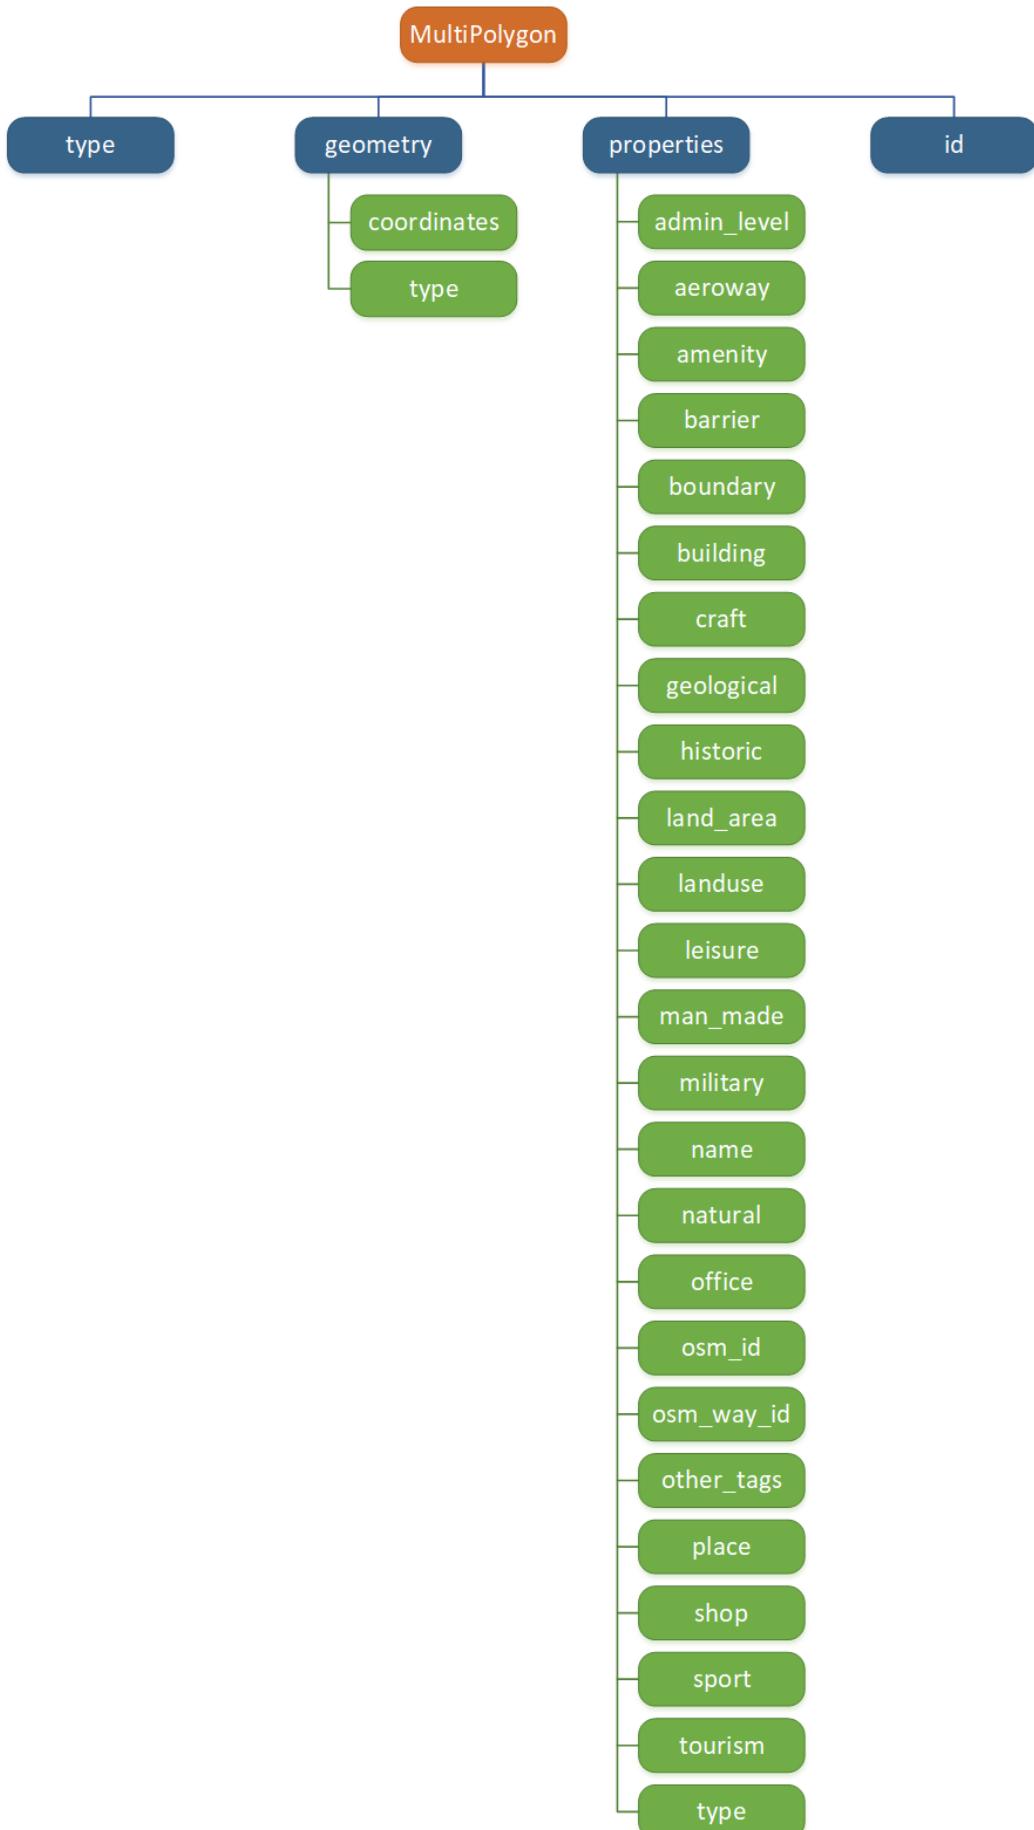


Fig. 4: Type of the geometry object and keys within the nested dictionary of 'multipolygons'.

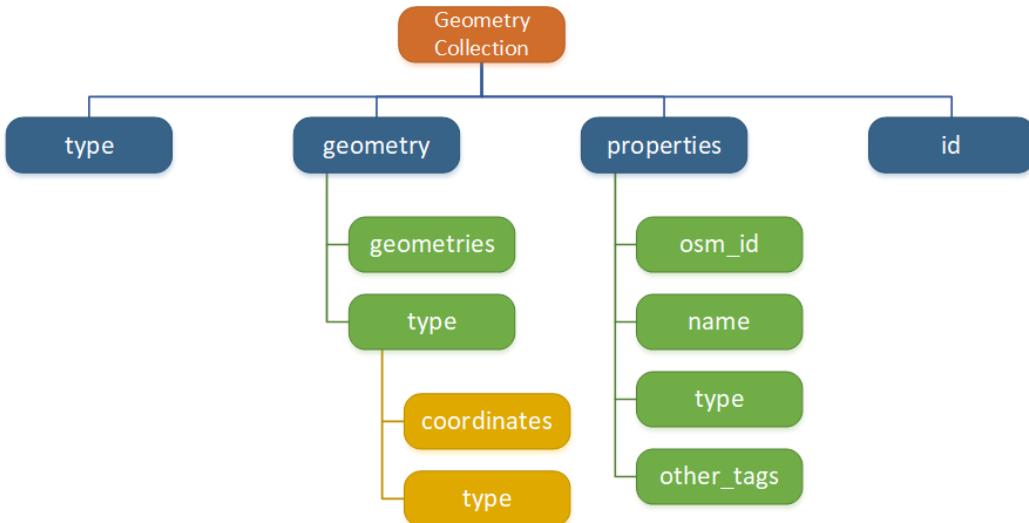


Fig. 5: Type of the geometry object and keys within the nested dictionary of 'other_relations'.

If we set `expand=True`, we can transform the `GeoJSON` records to dataframe and obtain data of 'visually' (though not virtually) higher level of granularity (*see also how to import the data into a PostgreSQL database*):

```
>>> rutland_pbf_parsed_1 = gfr.read_osm_pbf(
...     subregion_name=subrgn_name, data_dir=dat_dir, expand=True, verbose=True)
Parsing "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
```

Data of the expanded 'points' layer (*see also the retrieved data from database*):

```
>>> rutland_pbf_points_1 = rutland_pbf_parsed_1['points']
>>> rutland_pbf_points_1.head()
   id ...                               properties
0  488432 ...  {'osm_id': '488432', 'name': None, 'barrier': ...
1  488658 ...  {'osm_id': '488658', 'name': 'Tickencote Inter...
2 13883868 ...  {'osm_id': '13883868', 'name': None, 'barrier':...
3 14049101 ...  {'osm_id': '14049101', 'name': None, 'barrier':...
4 14558402 ...  {'osm_id': '14558402', 'name': None, 'barrier':...

[5 rows x 3 columns]

>>> rutland_pbf_points_1['geometry'].head()
0  {'type': 'Point', 'coordinates': [-0.5134241, ...
1  {'type': 'Point', 'coordinates': [-0.5313354, ...
2  {'type': 'Point', 'coordinates': [-0.7229332, ...
3  {'type': 'Point', 'coordinates': [-0.7249816, ...
4  {'type': 'Point', 'coordinates': [-0.7266581, ...

Name: geometry, dtype: object
```

The data can be further transformed/parsed via three more parameters: `parse_geometry`, `parse_other_tags` and `parse_properties`, which all default to `False`.

For example, let's now try `expand=True` and `parse_geometry=True`:

```
>>> rutland_pbf_parsed_2 = gfr.read_osm_pbf(
...     subrgn_name, data_dir=dat_dir, expand=True, parse_geometry=True, verbose=True)
>>> rutland_pbf_points_2 = rutland_pbf_parsed_2['points']
Parsing "tests\osm_data\rutland\rutland-latest.osm.pbf" ... Done.
```

(continues on next page)

(continued from previous page)

```
>>> rutland_pbf_points_2['geometry'].head()
   id ... properties
0 488432 ... {'osm_id': '488432', 'name': None, 'barrier': ...
1 488658 ... {'osm_id': '488658', 'name': 'Tickencote Inter...
2 13883868 ... {'osm_id': '13883868', 'name': None, 'barrier'...
3 14049101 ... {'osm_id': '14049101', 'name': None, 'barrier'...
4 14558402 ... {'osm_id': '14558402', 'name': None, 'barrier'...

[5 rows x 3 columns]

>>> rutland_pbf_points_2['geometry'].head()
0 POINT (-0.5134241 52.6555853)
1 POINT (-0.5313354 52.6737716)
2 POINT (-0.7229332 52.5889864)
3 POINT (-0.7249816 52.6748426)
4 POINT (-0.7266581 52.6695058)
Name: geometry, dtype: object
```

We can see the difference in 'geometry' column between `rutland_pbf_points_1` and `rutland_pbf_points_2`.

Note:

- If only the name of a geographic (sub)region is provided, e.g. `rutland_pbf = gfr.read_osm_pbf(subregion_name='Rutland')`, the method will go to look for the data file at the default file path. Otherwise, you need to specify `data_dir` where the data file is.
- If the data file does not exist at the default or specified directory, the method will by default try to download it first. To give up downloading the data, setting `download=False`.
- When `pickle_it=True`, the parsed data will be saved as a `Pickle` file. When you run the method next time, it will try to load the `Pickle` file first, provided that `update=False` (default); if `update=True`, the method will try to download and parse the latest version of the data file.
Note that `pickle_it=True` works only when `readable=True` and/or `expand=True`.

7.2.2 Shapefiles (.shp.zip / .shp)

To read shapefile data, we can use the method `GeofabrikReader.read_shp_zip()` or `SHPRReadParse.read_shp()`, which relies on `PyShp` (or optionally, `GeoPandas`).

Note:

- `GeoPandas` is not required for the installation of `pydriosm`.

For example, let's now try to read the 'railways' layer of the shapefile of 'London' by using `GeofabrikReader.read_shp_zip()`:

```
>>> subrgn_name = 'London'
>>> lyr_name = 'railways'
```

(continues on next page)

(continued from previous page)

```
>>> london_shp = gfr.read_shp_zip(
...     subregion_name=subrgn_name, layer_names=lyr_name, data_dir=dat_dir, verbose=True)
Downloading "greater-london-latest-free.shp.zip"
    to "tests\osm_data\greater-london\" ... Done.
Extracting the following layer(s):
    'railways'
    from "tests\osm_data\greater-london\greater-london-latest-free.shp.zip"
        to "tests\osm_data\greater-london\greater-london-latest-free-shp\" ... Done.
Reading "tests\osm_data\greater-london\greater-london-latest-free-shp\gis_osm_railways_free_1...
```

Check the data:

```
>>> data_type = type(london_shp)
>>> print(f'Data type of `london_shp`:\n\t{data_type}')
Data type of `london_shp`:
<class 'collections.OrderedDict'>

>>> data_keys = list(london_shp.keys())
>>> print(f'The "keys" of `london_shp`:\n\t{data_keys}')
The "keys" of `london_shp`:
['railways']

>>> layer_type = type(london_shp[lyr_name])
>>> print(f'Data type of the `{lyr_name}` layer:\n\t{layer_type}')
Data type of the 'railways' layer:
<class 'pandas.core.frame.DataFrame'>
```

Similar to the parsed PBF data, london_shp is also in `dict` type, with the `layer_name` being its key by default.

```
>>> london_railways_shp = london_shp[lyr_name] # london_shp['railways']
>>> london_railways_shp.head()
   osm_id  code  ...          coordinates  shape_type
0  30804  6101  ...  [(0.0048644, 51.6279262), (0.0061979, 51.62926...  3
1  101298  6103  ...  [(-0.2249906, 51.493682), (-0.2251678, 51.4945...  3
2  101486  6103  ...  [(-0.2055497, 51.5195429), (-0.2051377, 51.519...  3
3  101511  6101  ...  [(-0.2119027, 51.5241906), (-0.2108059, 51.523...  3
4  282898  6103  ...  [(-0.1862586, 51.6159083), (-0.1868721, 51.613...  3

[5 rows x 9 columns]
```

Note:

- When `layer_name=None` (default), all layers will be included.
- The parameter `feature_names` is related to '`fclass`' in `london_railways_shp`. You can specify one feature name (or multiple feature names) to get a subset of `london_railways_shp`.
- If the method `GeofabrikReader.read_shp_zip()` could not find the target `.shp` file at the default or specified directory (i.e. `dat_dir`), it will try to extract the `.shp` file from the `.shp.zip` file.
- If the `.shp.zip` file is not available either, the method `GeofabrikReader.read_shp_zip()` will try download the data first, provided that `download=True`; otherwise, setting `update=True` would allow the method to download the latest version of the data despite the availability of the `.shp.zip` file.

- If you'd like to delete the `.shp` files and/or the downloaded `.shp.zip` file, set the parameters `rm_extract=True` and/or `rm_shp_zip=True`.

If we would like to combine multiple (sub)regions over a certain layer, we can use the method `GeofabrikReader.merge_subregion_layer_shp()` to concatenate the `.shp` files of the specific layer.

For example, let's now merge the 'railways' layers of 'London' and 'Kent':

```
>>> subrgn_names = ['London', 'Kent']
>>> lyr_name = 'railways'

>>> path_to_merged_shp = gfr.merge_subregion_layer_shp(
...     subregion_names=subrgn_names, layer_name=lyr_name, data_dir=dat_dir, verbose=True,
...     ret_merged_shp_path=True)
"greater-london-latest-free.shp.zip" is already available
    at "tests\osm_data\greater-london\".

To download .shp.zip data of the following geographic (sub)region(s):
    Kent
? [No] | Yes: yes
Downloading "kent-latest-free.shp.zip"
    to "tests\osm_data\kent\" ... Done.
Merging the following shapefiles:
    "greater-london_gis_osm_railways_free_1.shp"
    "kent_gis_osm_railways_free_1.shp"
        In progress ... Done.
        Find the merged shapefile at "tests\osm_data\gre_lon-ken-railways\".

>>> # Relative path of the merged shapefile
>>> print(f"\'{os.path.relpath(path_to_merged_shp)}\'")
"tests\osm_data\gre_lon-ken-railways\linestring.shp"
```

We can read the merged shapefile data by using the method `SHPReadParse.read_layer_shps()`:

```
>>> from pydriosm.reader import SHPReadParse # from pydriosm import SHPReadParse

>>> london_kent_railways = SHPReadParse.read_layer_shps(path_to_merged_shp)
>>> london_kent_railways.head()
   osm_id  code ... coordinates shape_type
0  30804  6101 ... [(0.0048644, 51.6279262), (0.0061979, 51.62926... 3
1  101298  6103 ... [(-0.2249906, 51.493682), (-0.2251678, 51.4945... 3
2  101486  6103 ... [(-0.2055497, 51.5195429), (-0.2051377, 51.519... 3
3  101511  6101 ... [(-0.2119027, 51.5241906), (-0.2108059, 51.523... 3
4  282898  6103 ... [(-0.1862586, 51.6159083), (-0.1868721, 51.613... 3

[5 rows x 9 columns]
```

For more details, also check out the methods `SHPReadParse.merge_shps()` and `SHPReadParse.merge_layer_shps()`.

7.3 Import data into / fetch data from a PostgreSQL server

After downloading and reading the OSM data, PyDriosm further provides a practical solution - the module `pydriosm.ios` - to managing the storage I/O of the data through database. Specifically, the class `PostgresOSM`, which inherits from `pyhelpers.dbms.PostgreSQL`, can assist us with importing the OSM data into, and retrieving it from, a PostgreSQL server. To establish a connection with a PostgreSQL server, we need to specify the host address, port, username, password and a database name of the server. For example, let's connect/create to a database named '`osmdb_test`' in a local PostgreSQL server (as is installed with the default configuration):

```
>>> from pydriosm.ios import PostgresOSM

>>> host = 'localhost'
>>> port = 5432
>>> username = 'postgres'
>>> password = None # You need to type it in manually if `password=None`
>>> database_name = 'osmdb_test'

>>> # Create an instance of a running PostgreSQL server
>>> osmdb = PostgresOSM(
...     host=host, port=port, username=username, password=password,
...     database_name=database_name, data_source='Geofabrik')
Password (postgres@localhost:5432): ***
Creating a database: "osmdb_test" ... Done.
Connecting postgres:***@localhost:5432/osmdb_test ... Successfully.
```

The example is illustrated in Fig. 6:

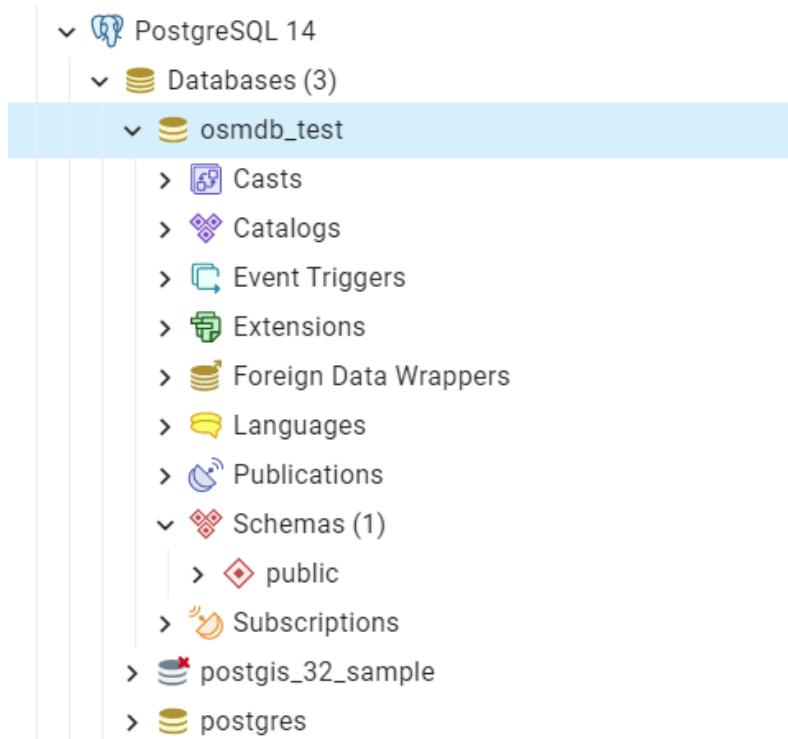


Fig. 6: An illustration of the database named '`osmdb_test`'.

Note:

- The parameter `password` is by default `None`. If we don't specify a password for creating an instance, we'll need to manually type in the password to the PostgreSQL server.
- The class `PostgresOSM` incorporates the classes for downloading and reading OSM data from the modules `downloader` and `reader` as properties. In the case of the above instance, `osmdb.downloader` is equivalent to the class `GeofabrikDownloader`, as the parameter `data_source='Geofabrik'` by default.
- To relate the instance `osmdb_test` to BBBike data, we could just run `osmdb.data_source = 'BBBike'`.
- See also the example of [reading Birmingham shapefile data](#).

7.3.1 Import data into the database

To import any of the above OSM data to a database in the connected PostgreSQL server, we can use the method `import_osm_data()` or `import_subregion_osm_pbf()`.

For example, let's now try to import `rutland_pbf_parsed_1` (see also [the parsed PBF data of Rutland above](#) that we've got from previous [PBF data \(.pbf / .osm.pbf\)](#) section:

```
>>> subrgn_name = 'Rutland'

>>> osmdb.import_osm_data(
...     rutland_pbf_parsed_1, table_name=subrgn_name, schema_names=None, verbose=True)
To import data into table "Rutland" at postgres:***@localhost:5432/osmdb_test
? [No] |Yes: yes
Importing the data ...
"points" ... Done: <total of rows> features.
"lines" ... Done: <total of rows> features.
"multilinestrings" ... Done: <total of rows> features.
"multipolygons" ... Done: <total of rows> features.
"other_relations" ... Done: <total of rows> features.
```

Note:

- The parameter `schema_names` is by default `None`, meaning that we import all the five layers of the PBF data into the database.

In the example above, five schemas are '`points`', '`lines`', '`multilinestrings`', '`multipolygons`' and '`other_relations`'. If they do not exist, they will be created in the database '`osmdb_test`' when running the method `import_osm_data()`. Each of the schemas corresponds to a key (i.e. name of a layer) of `rutland_pbf_parsed_1` (as illustrated in Fig. 7); the data of each layer is imported into a table named as "Rutland" under the corresponding schema (as illustrated in Fig. 8).

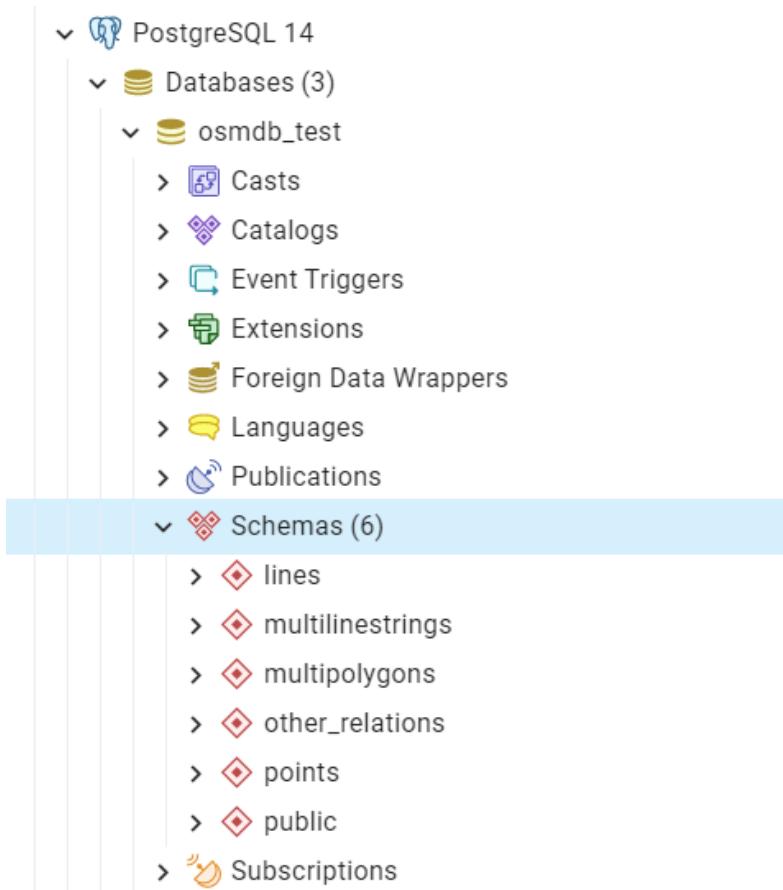


Fig. 7: An illustration of schemas for importing OSM PBF data into a PostgreSQL database.

	id	geometry	properties
1	488432	{type: Point, coordinates: [-0.5134241, 52.655585...}	{osm_id: '488432', name: None, 'barrier': None, 'highway': None, 'ref': None, 'address': None, 'is_in': None, 'place': No...
2	488658	{type: Point, coordinates: [0.5313354, 52.673771...}	{osm_id: '488658', name: 'Tickencote Interchange', 'barrier': None, 'highway': 'motorway_junction', 'ref': None, 'addr...
3	13883868	{type: Point, coordinates: [0.7229332, 52.588986...}	{osm_id: '13883868', name: None, 'barrier': None, 'highway': 'traffic_signals', 'ref': None, 'address': None, 'is_in': Non...
4	14049101	{type: Point, coordinates: [-0.7249816, 52.674842...}	{osm_id: '14049101', name: None, 'barrier': None, 'highway': 'None', 'ref': None, 'address': None, 'is_in': None, 'place': ...}
5	14558402	{type: Point, coordinates: [0.7266581, 52.669505...}	{osm_id: '14558402', name: None, 'barrier': None, 'highway': 'mini_rounabout', 'ref': None, 'address': None, 'is_in': N...
6	14558409	{type: Point, coordinates: [-0.7287807, 52.669642...}	{osm_id: '14558409', name: None, 'barrier': None, 'highway': 'crossing', 'ref': None, 'address': None, 'is_in': None, 'pla...
7	14583750	{type: Point, coordinates: [0.4704449, 52.6549006]}	{osm_id: '14583750', name: None, 'barrier': None, 'highway': 'mini_rounabout', 'ref': None, 'address': None, 'is_in': N...
8	14584519	{type: Point, coordinates: [-0.4701912, 52.685118...}	{osm_id: '14584519', name: 'Ryhall', 'barrier': None, 'highway': 'None', 'ref': None, 'address': None, 'is_in': None, 'place': ...}
9	14584584	{type: Point, coordinates: [0.5312257, 52.713143...}	{osm_id: '14584584', name: 'Pickworth', 'barrier': None, 'highway': 'None', 'ref': None, 'address': None, 'is_in': None, 'pl...
10	14588091	{type: Point, coordinates: [0.6628332, 52.713512...}	{osm_id: '14588091', name: 'Cottesmore', 'barrier': None, 'highway': 'None', 'ref': None, 'address': None, 'is_in': None, 'pla...
11	14588520	{type: Point, coordinates: [0.734261, 52.6711437]}	{osm_id: '14588520', name: 'Oakham', 'barrier': None, 'highway': 'None', 'ref': None, 'address': None, 'is_in': None, 'pla...
12	17817546	{type: Point, coordinates: [0.7125958, 52.585722...}	{osm_id: '17817546', name: None, 'barrier': None, 'highway': 'None', 'ref': None, 'address': None, 'is_in': None, 'place': ...}
13	18246588	{type: Point, coordinates: [0.7213803, 52.533896...}	{osm_id: '18246588', name: None, 'barrier': 'gate', 'highway': 'None', 'ref': None, 'address': None, 'is_in': None, 'place': ...}
14	18252913	{type: Point, coordinates: [0.6368133, 52.592942...}	{osm_id: '18252913', name: None, 'barrier': None, 'highway': 'None', 'ref': None, 'address': None, 'is_in': None, 'place': ...}
15	18288057	{type: Point, coordinates: [-0.6720358, 52.575382...}	{osm_id: '18288057', name: 'Seaton', 'barrier': None, 'highway': 'None', 'ref': None, 'address': None, 'is_in': None, 'place': ...}

Fig. 8: An illustration of table name for storing the '*points*' layer of the OSM PBF data of Rutland.

7.3.2 Fetch data from the database

To fetch all or specific layers of the imported data, we can use the method `fetch_osm_data()`. For example, let's retrieve all the PBF data of Rutland with `layer_names=None` (by default):

```
>>> # Retrieve the data from the database
>>> rutland_pbf_parsed_1_ = osmdb.fetch_osm_data(subrgn_name, verbose=True)
Fetching the data of "Rutland" ...
"points" ... Done.
"lines" ... Done.
"multilinestrings" ... Done.
"multipolygons" ... Done.
"other_relations" ... Done.
```

Check the data `rutland_pbf_parsed_1_` we just retrieved:

```
>>> retr_data_type = type(rutland_pbf_parsed_1_)
>>> print(f'Data type of `rutland_pbf_parsed_1_`:\n\t{retr_data_type}')
Data type of `rutland_pbf_parsed_1_`:
<class 'collections.OrderedDict'>

>>> retr_data_keys = list(rutland_pbf_parsed_1_.keys())
>>> print(f'The "keys" of `rutland_pbf_parsed_1_`:\n\t{retr_data_keys}')
The "keys" of `rutland_pbf_parsed_1_`:
['points', 'lines', 'multilinestrings', 'multipolygons', 'other_relations']

>>> retr_layer_type = type(rutland_pbf_parsed_1_['points'])
>>> print(f'Data type of the corresponding layer:\n\t{retr_layer_type}')
Data type of the corresponding layer:
<class 'pandas.core.frame.DataFrame'>
```

Take a quick look at the data of the '`points`':

```
>>> rutland_pbf_parsed_1_points_ = rutland_pbf_parsed_1_['points']
>>> rutland_pbf_parsed_1_points_.head()
   id ... properties
0  488432 ... {'osm_id': '488432', 'name': None, 'barrier': ...}
1  488658 ... {'osm_id': '488658', 'name': 'Tickencote Inter...', 'barrier': ...}
2  13883868 ... {'osm_id': '13883868', 'name': None, 'barrier': ...}
3  14049101 ... {'osm_id': '14049101', 'name': None, 'barrier': ...}
4  14558402 ... {'osm_id': '14558402', 'name': None, 'barrier': ...}

[5 rows x 3 columns]
```

Check whether `rutland_pbf_parsed_1_` is equal to `rutland_pbf_parsed_1` (see *the parsed data*):

```
>>> # 'points', 'lines', 'multilinestrings', 'multipolygons' or 'other_relations'
>>> lyr_name = 'points'

>>> check_equivalence = all(
...     rutland_pbf_parsed_1[lyr_name].equals(rutland_pbf_parsed_1_[lyr_name])
...     for lyr_name in rutland_pbf_parsed_1_.keys())
>>> print(f"`rutland_pbf_parsed_` is equivalent to `rutland_pbf_parsed`: {check_equivalence}")
`rutland_pbf_parsed_` is equivalent to `rutland_pbf_parsed`: True
```

Note:

- The parameter `layer_names` is `None` by default, meaning that we fetch data of all layers

available from the database.

- The data stored in the database was parsed by the method `GeofabrikReader.read_osm_pbf()` given `expand=True` (see [the parsed data](#)). When it is being imported in the PostgreSQL server, the data type of the column 'coordinates' is converted from `list` to `str`. Therefore, to retrieve the same data in the above example for the method `fetch_osm_data()`, the parameter `decode_geojson` is by default `True`.

7.3.3 Specific layers of shapefile

Below is another example of importing/fetching data of multiple layers in a customised order. Let's firstly import the transport-related layers of Birmingham shapefile data.

Note:

- 'Birmingham' is not listed on the free download catalogue of [Geofabrik](#) but that of [BBBike](#). We need to change the data source to 'BBBike' for the instance `osmdb` (see also the [note above](#)).

```
>>> osmdb.data_source = 'BBBike' # Change to 'BBBike'

>>> subrgn_name = 'Birmingham'

>>> bham_shp = osmdb.reader.read_shp_zip(subrgn_name, data_dir=dat_dir, verbose=True)
Downloading "Birmingham.osm.shp.zip"
  to "tests\osm_data\birmingham\" ... Done.
Extracting "tests\osm_data\birmingham\Birmingham.osm.shp.zip"
  to "tests\osm_data\birmingham\" ... Done.
Reading the shapefile(s) at
  "tests\osm_data\birmingham\Birmingham-shp\shape\" ... Done.
```

Check the data `bham_shp`:

```
>>> retr_data_type = type(bham_shp)
>>> print(f'Data type of `bham_shp`:{\n\t{retr_data_type}}')
Data type of `bham_shp`:
<class 'collections.OrderedDict'>

>>> retr_data_keys = list(bham_shp.keys())
>>> print(f'The "keys" of `bham_shp`:{\n\t{retr_data_keys}}')
The "keys" of `bham_shp`:
['buildings', 'landuse', 'natural', 'places', 'points', 'railways', 'roads', 'waterways']

>>> retr_layer_type = type(bham_shp[lyr_name])
>>> print(f'Data type of the corresponding layer:{\n\t{retr_layer_type}}')
Data type of the corresponding layer:
<class 'pandas.core.frame.DataFrame'>
```

We could import the data of a list of selected layers. For example, let's import the data of 'railways', 'roads' and 'waterways':

```
>>> lyr_names = ['railways', 'roads', 'waterways']

>>> osmdb.import_osm_data(
```

(continues on next page)

(continued from previous page)

```
...     bham_shp, table_name=subrgn_name, schema_names=lyr_names, verbose=True)
To import data into table "Birmingham" at postgres:***@localhost:5432/osmdb_test
? [No] |Yes: yes
Importing the data ...
    "railways" ... Done: <total of rows> features.
    "roads" ... Done: <total of rows> features.
    "waterways" ... Done: <total of rows> features.
```

As illustrated in Fig. 9, three schemas: '*railways*', '*roads*' and '*waterways*' are created in the '*osmdb_test*' database for storing the data of the three shapefile layers of Birmingham.

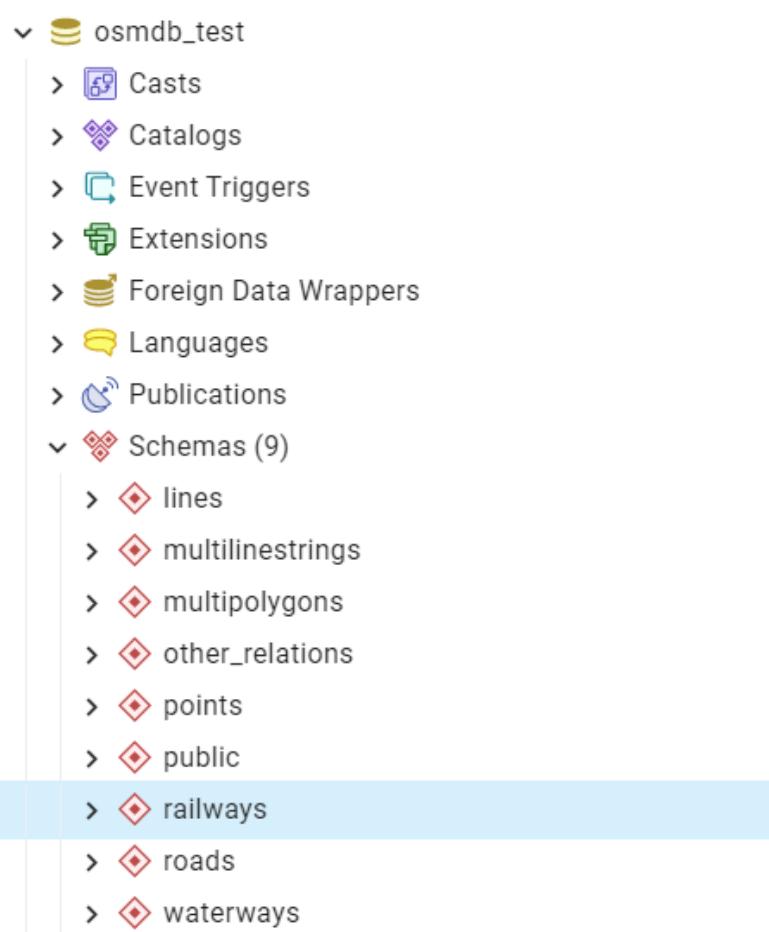


Fig. 9: An illustration of the newly created schemas for the selected layers of Birmingham shapefile data.

Now let's fetch only the '*railways*' data of Birmingham from the '*osmdb_test*' database:

```
>>> lyr_name = 'railways'

>>> bham_shp_ = osmdb.fetch_osm_data(
...     subrgn_name, layer_names=lyr_name, sort_by='osm_id', verbose=True)
Fetching the data of "Birmingham" ...
    "railways" ... Done.
```

Check the data *bham_shp_*:

```
>>> retr_data_type = type(bham_shp_)
>>> print(f'Data type of `bham_shp_`:\n\t{retr_data_type}')
Data type of `bham_shp_`:
<class 'collections.OrderedDict'>

>>> retr_data_keys = list(bham_shp_.keys())
>>> print(f'The "keys" of `bham_shp_`:\n\t{retr_data_keys}')
The "keys" of `bham_shp_`:
['railways']

>>> # Data frame of the 'railways' layer
>>> bham_shp_railways_ = bham_shp_[lyr_name]
>>> bham_shp_railways_.head()
   osm_id ... shape_type
0      740 ...      3
1     2148 ...      3
2  2950000 ...      3
3   3491845 ...      3
4   3981454 ...      3

[5 rows x 5 columns]
```

Note:

- `bham_shp_railways` and `bham_shp_railways_` both in `pandas.DataFrame` type.
- It must be noted that empty strings, '', may be automatically saved as `None` when importing `bham_shp` into the PostgreSQL database.
- The data retrieved from a PostgreSQL database may not be in the same order as it is in the database; the retrieved `bham_shp_railways_` may not be exactly equal to `bham_shp_railways`. However, they contain exactly the same information. We could sort the data by '`id`' (or '`osm_id`') to make a comparison (see the test code below).

Check whether `bham_shp_railways_` is equivalent to `bham_shp_railways` (before filling `None` with ''):

```
>>> bham_shp_railways = bham_shp[lyr_name]

>>> check_eq = bham_shp_railways_.equals(bham_shp_railways)
>>> print(f"`bham_shp_railways_` is equivalent to `bham_shp_railways`: {check_eq}")
`bham_shp_railways_` is equivalent to `bham_shp_railways`: False
```

Let's fill `None` values with '' and check the equivalence again:

```
>>> # Try filling `None` values with ''
>>> bham_shp_railways_.fillna('', inplace=True)

>>> # Check again whether `bham_shp_railways_` is equal to `bham_shp_railways`
>>> check_eq = bham_shp_railways_.equals(bham_shp_railways)
>>> print(f"`bham_shp_railways_` is equivalent to `bham_shp_railways`: {check_eq}")
`bham_shp_railways_` is equivalent to `bham_shp_railways`: True
```

7.3.4 Drop data

To drop the data of all or selected layers that have been imported for one or multiple geographic regions, we can use the method `drop_subregion_tables()`.

For example, let's now drop the '*railways*' schema for Birmingham:

```
>>> # Recall that: subrgn_name == 'Birmingham'; lyr_name == 'railways'
>>> osmdb.drop_subregion_tables(subrgn_name, schema_names=lyr_name, verbose=True)
To drop table "railways"."Birmingham"
    from postgres:**@localhost:5432/osmdb_test
? [No] |Yes: yes
Dropping the table ...
"railways"."Birmingham" ... Done.
```

Then drop the '*waterways*' schema for Birmingham, and both the '*lines*' and '*multilinestrings*' schemas for Rutland:

```
>>> subrgn_names = ['Birmingham', 'Rutland']
>>> lyr_names = ['waterways', 'lines', 'multilinestrings']
>>> osmdb.drop_subregion_tables(subrgn_names, schema_names=lyr_names, verbose=True)
To drop tables from postgres:**@localhost:5432/osmdb_test:
    "Birmingham"
    "Rutland"
under the schemas:
    "lines"
    "waterways"
    "multilinestrings"
? [No] |Yes: yes
Dropping the tables ...
    "lines"."Rutland" ... Done.
    "waterways"."Birmingham" ... Done.
    "multilinestrings"."Rutland" ... Done.
```

We could also easily drop the whole database '*osmdb_test*' if we don't need it anymore:

```
>>> osmdb.drop_database(verbose=True)
To drop the database "osmdb_test" from postgres:**@localhost:5432
? [No] |Yes: yes
Dropping "osmdb_test" ... Done.
```

7.4 Clear up 'the mess' in here

Now we are approaching the end of this tutorial. The final task we may want to do is to remove all the data files that have been downloaded and generated. Those data are all stored in the directory "`tests\osm_data\`". Let's take a quick look at what's in here:

```
>>> os.listdir(dat_dir) # Recall that dat_dir == "tests\osm_data"
['birmingham',
 'greater-london',
 'gre_lon-ken-railways',
 'kent',
 'rutland',
 'west-midlands',
 'west-yorkshire']
```

Let's delete the directory "tests\osm_data\":

```
>>> from pyhelpers.dirs import delete_dir

>>> delete_dir(dat_dir, verbose=True)
To delete the directory "tests\osm_data\" (Not empty)
? [No] |Yes: yes
Deleting "tests\osm_data\" ... Done.

>>> os.path.exists(dat_dir) # Check if the directory still exists
False
```

This is the end of the *Quick start*.

Any issues regarding the use of the package are all welcome and should be logged/reported onto the [Issue Tracker](#).

For more details and examples, check [Modules](#).

Python Module Index

p

`pydriosm`, [4](#)
`pydriosm.downloader`, [4](#)
`pydriosm.errors`, [154](#)
`pydriosm.ios`, [125](#)
`pydriosm.reader`, [59](#)
`pydriosm.utils`, [156](#)

Index

Symbols

_Downloader (*class in pydriosm.downloader*), 4
_Reader (*class in pydriosm.reader*), 90

B

BBBikeDownloader (*class in pydriosm.downloader*), 43
BBBikeIOS (*class in pydriosm.ios*), 151
BBBikeReader (*class in pydriosm.reader*), 116

C

cdd() (*pydriosm.downloader._Downloader class method*), 7
cdd() (*pydriosm.reader._Reader class method*), 93
cdd_bbbike() (*in module pydriosm.utils*), 157
cdd_geofabrik() (*in module pydriosm.utils*), 157
check_json_engine() (*in module pydriosm.utils*), 158
CITIES_COORDS_URL (*pydriosm.downloader.BBBikeDownloader attribute*), 45
CITIES_URL (*pydriosm.downloader.BBBikeDownloader attribute*), 45
compose_cfm_msg() (*pydriosm.downloader._Downloader class method*), 8

D

data_dir (*pydriosm.reader._Reader property*), 91
data_paths (*pydriosm.reader._Reader property*), 92
DATA_SOURCES (*pydriosm.ios.PostgresOSM attribute*), 127
DATA_TYPES (*pydriosm.ios.PostgresOSM attribute*), 127
decode_pbf_layer() (*pydriosm.ios.PostgresOSM method*), 130
DEFAULT_DATA_DIR (*pydriosm.reader._Reader attribute*), 91
DEFAULT_DATA_DIR (*pydriosm.reader.GeofabrikReader attribute*), 103
DEFAULT_DOWNLOAD_DIR (*pydriosm.downloader._Downloader attribute*), 6
DEFAULT_DOWNLOAD_DIR
 (*pydriosm.downloader.BBBikeDownloader attribute*), 45
DEFAULT_DOWNLOAD_DIR
 (*pydriosm.downloader.GeofabrikDownloader attribute*), 20
DEFAULT_DOWNLOAD_DIR (*pydriosm.reader.BBBikeReader attribute*), 117
DOWNLOAD_INDEX_URL
 (*pydriosm.downloader.GeofabrikDownloader attribute*), 20
download_osm_data()
 (*pydriosm.downloader.BBBikeDownloader method*), 46

download_osm_data()
 (*pydriosm.downloader.GeofabrikDownloader method*), 22
download_subregion_data()
 (*pydriosm.downloader.BBBikeDownloader method*), 48
download_subregion_data()
 (*pydriosm.downloader.GeofabrikDownloader method*), 25
downloader (*pydriosm.ios.PostgresOSM property*), 127
drop_subregion_tables() (*pydriosm.ios.PostgresOSM method*), 130

E

ENCODING (*pydriosm.reader.SHPReadParse attribute*), 74
EPSG4326_WGS84_ESRI_WKT (*pydriosm.reader.SHPReadParse attribute*), 74
EPSG4326_WGS84_PROJ4 (*pydriosm.reader.SHPReadParse attribute*), 75
EPSG4326_WGS84_PROJ4_ (*pydriosm.reader.SHPReadParse attribute*), 75

F

fetch_osm_data() (*pydriosm.ios.PostgresOSM method*), 134
file_exists() (*pydriosm.downloader._Downloader method*), 9
file_exists() (*pydriosm.downloader.BBBikeDownloader method*), 50
file_exists() (*pydriosm.downloader.GeofabrikDownloader method*), 28
file_exists_and_more()
 (*pydriosm.downloader._Downloader method*), 10
FILE_FORMATS (*pydriosm.downloader._Downloader attribute*), 6
FILE_FORMATS (*pydriosm.downloader.BBBikeDownloader attribute*), 45
FILE_FORMATS (*pydriosm.downloader.GeofabrikDownloader attribute*), 20
FILE_FORMATS (*pydriosm.reader.BBBikeReader attribute*), 117
FILE_FORMATS (*pydriosm.reader.GeofabrikReader attribute*), 103
FILE_FORMATS (*pydriosm.reader.VarReadParse attribute*), 89
find_shp_layer_name() (*pydriosm.reader.SHPReadParse class method*), 76
first_unique() (*in module pydriosm.utils*), 158

G

GeofabrikDownloader (*class in pydriosm.downloader*), 18
GeofabrikIOS (*class in pydriosm.ios*), 150
GeofabrikReader (*class in pydriosm.reader*), 102
get_catalogue() (*pydriosm.downloader.BBBikeDownloader method*), 52

get_catalogue() (*pydriosm.downloader.GeofabrikDownloader method*), 29
 get_continent_tables()
 (*pydriosm.downloader.GeofabrikDownloader method*),
 30
 get_coordinates_of_cities()
 (*pydriosm.downloader.BBBikeDownloader class method*), 52
 get_default_filename()
 (*pydriosm.downloader.GeofabrikDownloader method*),
 31
 get_default_layer_name() (*in module pydriosm.ios*), 152
 get_default.pathname()
 (*pydriosm.downloader.GeofabrikDownloader method*),
 32
 get_default_sub_path()
 (*pydriosm.downloader._Downloader class method*), 11
 get_download_index()
 (*pydriosm.downloader.GeofabrikDownloader method*),
 33
 get_file_path() (*pydriosm.reader._Reader method*), 93
 get_file_path() (*pydriosm.reader.GeofabrikReader method*),
 103
 get_names_of_cities()
 (*pydriosm.downloader.BBBikeDownloader class method*), 53
 get_pbf_layer_geom_types()
 (*pydriosm.reader.PBFRReadParse class method*), 67
 get_pbf_layer_names() (*pydriosm.reader.GeofabrikReader method*), 104
 get_pbf_layer_names() (*pydriosm.reader.PBFRReadParse class method*), 68
 get_repacked_data() (*pydriosm.downloader._Downloader class method*), 11
 get_raw_directory_index()
 (*pydriosm.downloader.GeofabrikDownloader class method*), 34
 get_region_subregion_tier()
 (*pydriosm.downloader.GeofabrikDownloader method*),
 35
 get_shp.pathname() (*pydriosm.reader._Reader method*), 94
 get_shp.pathname() (*pydriosm.reader.GeofabrikReader method*), 105
 get_subregion_catalogue()
 (*pydriosm.downloader.BBBikeDownloader method*), 54
 get_subregion_download_url()
 (*pydriosm.downloader._Downloader class method*), 12
 get_subregion_download_url()
 (*pydriosm.downloader.BBBikeDownloader method*), 55
 get_subregion_download_url()
 (*pydriosm.downloader.GeofabrikDownloader method*),
 36
 get_subregion_index()
 (*pydriosm.downloader.BBBikeDownloader class method*), 56
 get_subregion_table()
 (*pydriosm.downloader.GeofabrikDownloader class method*), 37
 get_subregions()
 (*pydriosm.downloader.GeofabrikDownloader method*),
 38
 get_table_column_info() (*pydriosm.ios.PostgresOSM method*), 137
 get_table_name() (*pydriosm.ios.PostgresOSM method*), 138
 get_valid_download_info()
 (*pydriosm.downloader._Downloader method*), 13
 get_valid_download_info()
 (*pydriosm.downloader.BBBikeDownloader method*), 56
 get_valid_download_info()
 (*pydriosm.downloader.GeofabrikDownloader method*),
 39
 get_valid_subregion_names()
 (*pydriosm.downloader.BBBikeDownloader class method*), 57
 get_valid_subregion_names()
 (*pydriosm.downloader.GeofabrikDownloader method*),
 40

I

import_osm_data() (*pydriosm.ios.PostgresOSM method*), 139
 import_osm_layer() (*pydriosm.ios.PostgresOSM method*),
 143
 import_subregion_osm_pbf() (*pydriosm.ios.PostgresOSM method*), 146
 InvalidFormatException (*class in pydriosm.errors*), 155
 InvalidSubregionNameError (*class in pydriosm.errors*), 154

L

LAYER_GEOM (*pydriosm.reader.PBFRReadParse attribute*), 66
 LAYER_NAMES (*pydriosm.reader.SHPReadParse attribute*), 75
 LONG_NAME (*pydriosm.downloader._Downloader attribute*), 6
 LONG_NAME (*pydriosm.downloader.BBBikeDownloader attribute*),
 45
 LONG_NAME (*pydriosm.downloader.GeofabrikDownloader attribute*), 20
 LONG_NAME (*pydriosm.reader._Reader attribute*), 91

M

make_shp_pk1.pathname() (*pydriosm.reader._Reader class method*), 96
 make_subregion_dirname()
 (*pydriosm.downloader._Downloader class method*), 14
 merge_layer_shps() (*pydriosm.reader.SHPReadParse class method*), 77
 merge_shps() (*pydriosm.reader.SHPReadParse class method*),
 79
 merge_subregion_layer_shp()
 (*pydriosm.reader.GeofabrikReader method*), 107
 module
 pydriosm, 4
 pydriosm.downloader, 4
 pydriosm.errors, 154
 pydriosm.ios, 125
 pydriosm.reader, 59
 pydriosm.utils, 156

N

NAME (*pydriosm.downloader._Downloader attribute*), 6
 NAME (*pydriosm.downloader.BBBikeDownloader attribute*), 45
 NAME (*pydriosm.downloader.GeofabrikDownloader attribute*), 20
 name (*pydriosm.ios.PostgresOSM property*), 128
 NAME (*pydriosm.reader._Reader attribute*), 91

O

OtherTagsReformatError (*class in pydriosm.errors*), 156

P

PBFRReadParse (*class in pydriosm.reader*), 66

point_as_polygon() (*pydriosm.reader.Transformer class method*), 60

PostgresOSM (*class in pydriosm.ios*), 125

print_act_msg() (*pydriosm.downloader._Downloader class method*), 14

print_otw_msg() (*pydriosm.downloader._Downloader class method*), 15

pydriosm

 module, 4

pydriosm.downloader

 module, 4

pydriosm.errors

 module, 154

pydriosm.ios

 module, 125

pydriosm.reader

 module, 59

pydriosm.utils

 module, 156

R

read_csv_xz() (*pydriosm.reader.BBBikeReader method*), 117

read_csv_xz() (*pydriosm.reader.VarReadParse class method*), 89

read_geojson_xz() (*pydriosm.reader.BBBikeReader method*), 118

read_geojson_xz() (*pydriosm.reader.VarReadParse class method*), 89

read_layer_shps() (*pydriosm.reader.SHPReadParse class method*), 80

read_osm_pbf() (*pydriosm.reader._Reader method*), 97

read_osm_pbf() (*pydriosm.reader.BBBikeReader method*), 120

read_osm_pbf() (*pydriosm.reader.GeofabrikReader method*), 110

read_osm_var() (*pydriosm.reader._Reader method*), 98

read_pbf() (*pydriosm.reader.PBFRReadParse class method*), 69

read_pbf_layer() (*pydriosm.reader.PBFRReadParse class method*), 72

read_shp() (*pydriosm.reader.SHPReadParse class method*), 81

read_shp_zip() (*pydriosm.reader._Reader method*), 99

read_shp_zip() (*pydriosm.reader.BBBikeReader method*), 122

read_shp_zip() (*pydriosm.reader.GeofabrikReader method*), 113

reader (*pydriosm.ios.PostgresOSM property*), 128

remove_extracts() (*pydriosm.reader._Reader class method*), 100

remove_osm_file() (*in module pydriosm.utils*), 159

S

SHAPE_TYPE_GEOM (*pydriosm.reader.SHPReadParse attribute*), 75

SHAPE_TYPE_GEOM_NAME (*pydriosm.reader.SHPReadParse attribute*), 75

SHAPE_TYPE_NAME_LOOKUP (*pydriosm.reader.SHPReadParse attribute*), 76

SHPReadParse (*class in pydriosm.reader*), 73

specify_sub_download_dir()

 (*pydriosm.downloader.GeofabrikDownloader method*), 41

subregion_table_exists() (*pydriosm.ios.PostgresOSM method*), 149

T

transform_geometry() (*pydriosm.reader.Transformer class method*), 61

transform_geometry_collection()

 (*pydriosm.reader.Transformer class method*), 62

transform_other_tags() (*pydriosm.reader.Transformer class method*), 63

transform_pbf_layer_field()

 (*pydriosm.reader.PBFRReadParse class method*), 72

transform_unitary_geometry()

 (*pydriosm.reader.Transformer class method*), 64

Transformer (*class in pydriosm.reader*), 60

U

unzip_shp_zip() (*pydriosm.reader.SHPReadParse class method*), 83

update_other_tags() (*pydriosm.reader.Transformer class method*), 65

URL (*pydriosm.downloader.BBBikeDownloader attribute*), 45

URL (*pydriosm.downloader.GeofabrikDownloader attribute*), 20

url (*pydriosm.ios.PostgresOSM property*), 129

V

VALID_SUBREGION_NAMES (*pydriosm.downloader._Downloader attribute*), 6

validate_file_format()

 (*pydriosm.downloader._Downloader class method*), 16

validate_file_format()

 (*pydriosm.downloader.BBBikeDownloader method*), 58

validate_file_format()

 (*pydriosm.downloader.GeofabrikDownloader method*), 42

validate_file_path() (*pydriosm.reader._Reader class method*), 100

validate_input_dtype() (*pydriosm.reader._Reader class method*), 101

validate_schema_names() (*in module pydriosm.ios*), 152

validate_shp_layer_names() (*pydriosm.reader._Reader method*), 101

validate_shp_layer_names()

 (*pydriosm.reader.SHPReadParse class method*), 86

validate_subregion_name()

 (*pydriosm.downloader._Downloader class method*), 17

validate_subregion_name()

 (*pydriosm.downloader.BBBikeDownloader method*), 59

validate_subregion_name()

 (*pydriosm.downloader.GeofabrikDownloader method*), 43

validate_table_name() (*in module pydriosm.ios*), 153

VarReadParse (*class in pydriosm.reader*), 88

VECTOR_DRIVER (*pydriosm.reader.SHPReadParse attribute*), 76

verify_download_dir() (*pydriosm.downloader._Downloader method*), 18

W

`write_to_shapefile()` (*pydriosm.reader.SHPReadParse class method*), 86